

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902660

Luminaire Tested: DFN2DIP-HX3F0-080D090US830-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902660
REPORT IS A COMBINATION OF REPORTS P899295 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-080D090US830-FLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14972.3 lumens
Efficiency: N/A
Efficacy: 99.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 151.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902660

CATALOG NUMBER: DFN2DIP-HX3F0-080D090US830-FLLFLL

Luminous Intensity Polar Plot

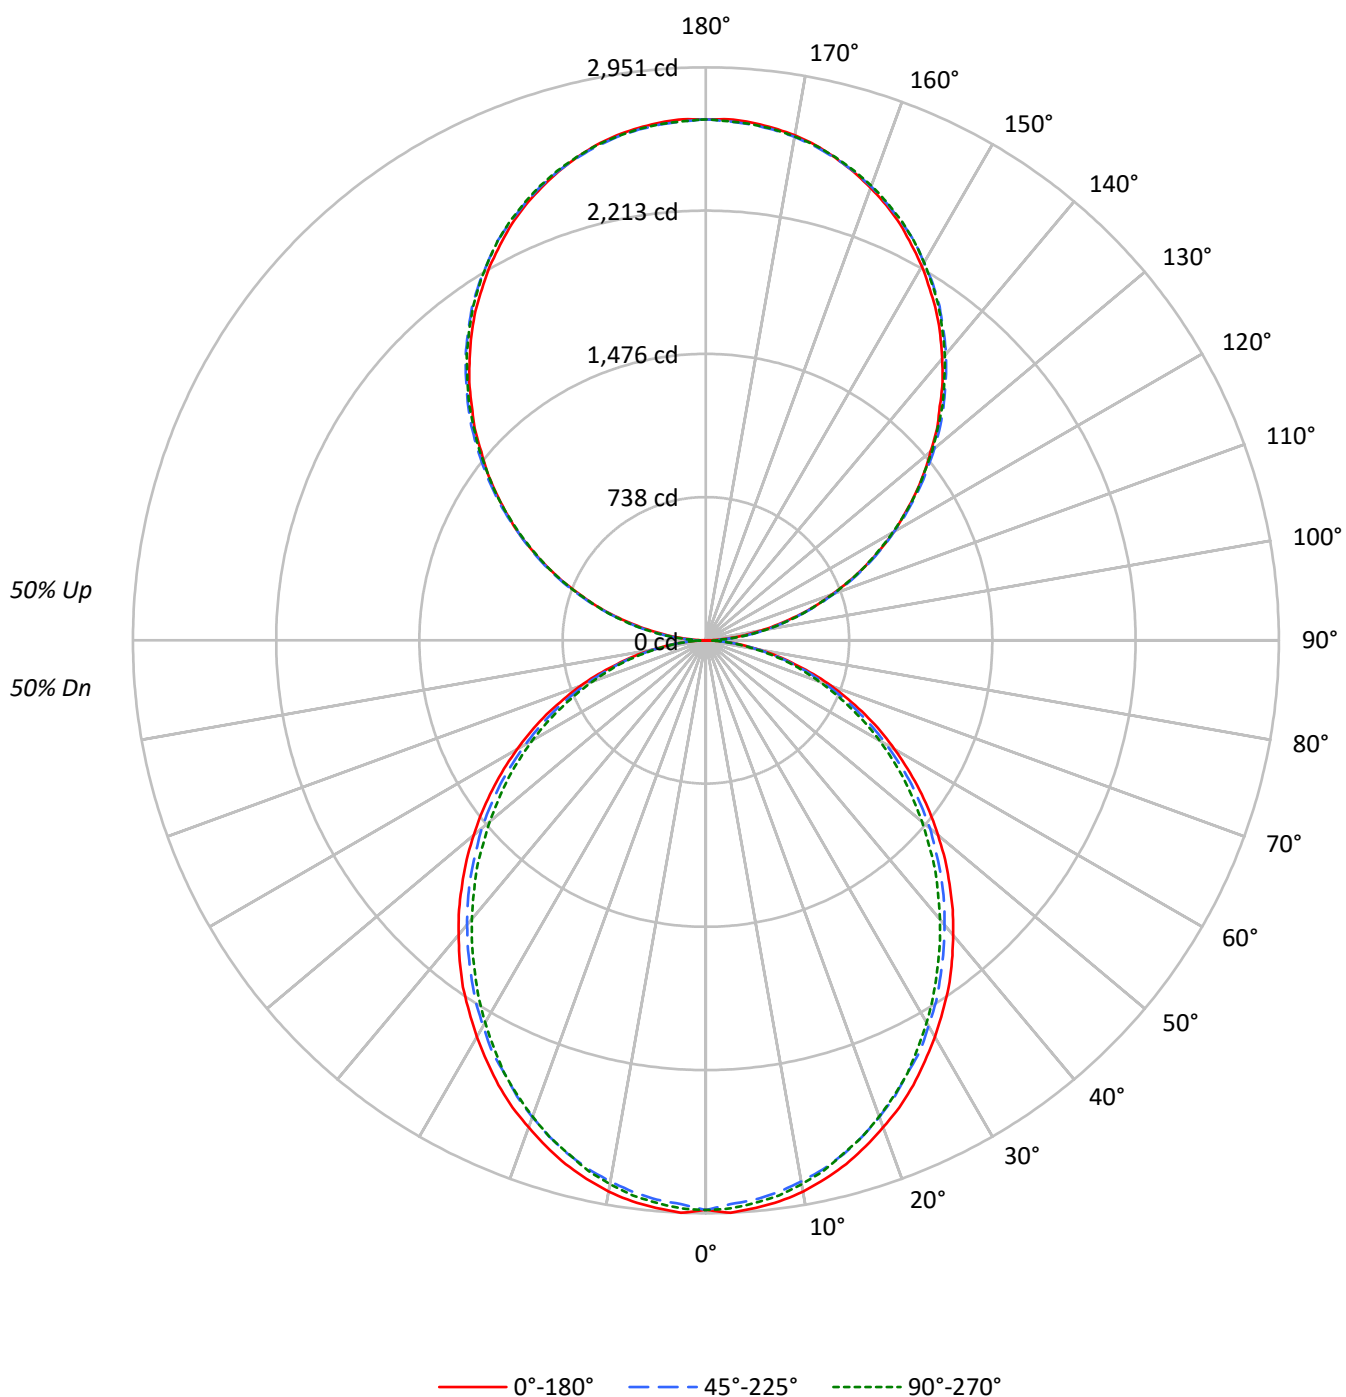

TEST NUMBER: P902660

CATALOG NUMBER: DFN2DIP-HX3F0-080D090US830-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56
1	98	93	90	86	90	86	83	80	73	71	68	61	59	58	50	48	47
2	89	82	75	70	82	75	70	66	64	60	57	53	51	48	44	42	40
3	81	72	64	59	75	66	60	55	56	52	48	47	44	41	39	36	34
4	74	63	56	50	68	59	52	46	50	45	41	42	38	35	35	32	29
5	68	57	48	42	63	53	45	40	45	39	35	38	34	30	31	28	25
6	63	51	43	37	58	47	40	35	40	35	31	34	30	26	28	25	22
7	58	46	38	32	53	43	36	30	37	31	27	31	27	23	26	22	20
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	24	20	18
9	50	38	30	25	46	35	29	24	31	25	21	26	22	19	22	19	16
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3398	3398	3398
5°	3402	3349	3372
10°	3373	3301	3324
15°	3322	3245	3251
20°	3254	3167	3176
25°	3185	3074	3090
30°	3100	2988	2981
35°	3019	2886	2865
40°	2920	2784	2755
45°	2821	2680	2643
50°	2713	2572	2513
55°	2599	2447	2392
60°	2471	2299	2255
65°	2330	2145	2092
70°	2151	1957	1917
75°	1904	1732	1752
80°	1605	1444	1443
85°	1139	956	936

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2821 cd/sqm

TEST NUMBER: P902660

CATALOG NUMBER: DFN2DIP-HX3F0-080D090US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.1	1.8
10°-20°	777.0	5.2
20°-30°	1141.8	7.6
30°-40°	1326.2	8.9
40°-50°	1324.5	8.8
50°-60°	1155.0	7.7
60°-70°	853.8	5.7
70°-80°	483.0	3.2
80°-90°	135.1	0.9
90°-100°	166.0	1.1
100°-110°	527.5	3.5
110°-120°	902.7	6.0
120°-130°	1187.2	7.9
130°-140°	1332.5	8.9
140°-150°	1306.7	8.7
150°-160°	1096.1	7.3
160°-170°	726.9	4.9
170°-180°	254.1	1.7
0°-30°	2195.0	14.7
0°-40°	3521.1	23.5
0°-60°	6000.6	40.1
0°-90°	7472.6	49.9
90°-120°	1596.2	10.7
90°-150°	5422.6	36.2
90°-180°	7500.0	50.1
0°-180°	14972.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2934	2934	2934	2934	2934	
5°	2934	2923	2892	2914	2909	279
15°	2793	2776	2739	2751	2737	787
25°	2528	2505	2458	2463	2458	1163
35°	2181	2153	2108	2090	2076	1362
45°	1775	1755	1712	1682	1670	1370
55°	1343	1326	1292	1258	1244	1201
65°	906	889	860	835	821	896
75°	474	468	454	437	443	506
85°	116	113	110	102	99	129
90°	2	29	79	74	77	15
95°	118	141	145	145	141	131
105°	487	493	498	502	502	514
115°	906	919	915	912	906	896
125°	1318	1338	1331	1324	1322	1177
135°	1704	1729	1734	1732	1725	1317
145°	2069	2085	2098	2100	2092	1293
155°	2366	2372	2380	2391	2384	1089
165°	2574	2571	2571	2587	2576	726
175°	2678	2671	2667	2683	2669	254
180°	2683	2683	2683	2683	2683	

TEST NUMBER: P902660

CATALOG NUMBER: DFN2DIP-HX3F0-080D090US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2933.9	2933.9	2933.9	2933.9	2933.9
2.5°	2951.0	2937.0	2905.9	2933.9	2928.6
5°	2933.9	2922.9	2891.8	2914.2	2908.9
7.5°	2914.2	2897.5	2866.4	2889.1	2883.4
10°	2883.4	2863.6	2829.8	2852.2	2843.9
12.5°	2840.9	2824.1	2790.3	2804.3	2798.7
15°	2793.0	2776.3	2739.4	2750.8	2736.8
17.5°	2733.7	2717.0	2680.1	2694.3	2680.1
20°	2668.8	2652.0	2612.5	2620.9	2609.8
22.5°	2604.2	2578.7	2541.8	2541.8	2536.2
25°	2527.8	2505.4	2457.5	2462.9	2457.5
27.5°	2443.1	2423.4	2386.8	2378.4	2364.4
30°	2358.7	2335.9	2293.8	2285.4	2274.0
32.5°	2268.3	2251.5	2206.3	2189.2	2177.9
35°	2180.9	2152.8	2107.5	2090.5	2076.4
37.5°	2082.1	2056.6	2011.5	1991.7	1977.6
40°	1980.7	1957.8	1912.7	1887.5	1876.1
42.5°	1881.9	1859.1	1814.2	1785.7	1769.1
45°	1774.7	1754.9	1712.4	1681.6	1670.3
47.5°	1670.3	1650.5	1605.2	1574.1	1557.4
50°	1560.1	1546.1	1506.5	1467.0	1452.9
52.5°	1452.9	1433.1	1396.7	1365.6	1345.8
55°	1343.0	1326.0	1292.2	1258.4	1244.3
57.5°	1232.9	1218.9	1182.0	1148.2	1136.8
60°	1122.8	1111.7	1072.1	1041.0	1032.6
62.5°	1015.6	995.9	967.7	939.6	928.2
65°	905.8	888.7	860.5	835.1	821.0
67.5°	792.9	778.5	753.4	733.7	722.3
70°	688.4	677.0	651.7	631.9	620.8
72.5°	581.3	570.0	555.8	536.1	527.7
75°	473.8	468.4	454.1	437.3	443.0
77.5°	378.1	366.6	361.0	352.6	344.2
80°	282.3	279.3	273.6	265.2	259.5
82.5°	191.9	191.9	189.2	177.8	177.8
85°	115.6	112.8	110.2	101.5	98.8
87.5°	50.9	45.2	39.5	31.1	28.2
90°	2.5	29.1	79.3	74.4	76.8
92.5°	50.1	68.0	70.4	72.8	72.8
95°	118.1	140.7	144.8	144.8	140.7
97.5°	196.5	217.5	226.5	226.5	226.5
100°	287.1	305.8	312.2	312.2	309.8
102.5°	382.6	396.3	405.2	407.6	405.2
105°	486.9	493.3	498.2	502.3	502.3
107.5°	590.4	600.1	600.1	601.7	590.4
110°	690.7	703.7	703.7	703.7	697.2



TEST NUMBER: P902660

CATALOG NUMBER: DFN2DIP-HX3F0-080D090US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	799.1	812.8	810.4	804.0	799.1
115°	905.9	918.8	914.7	912.4	905.9
117.5°	1011.8	1029.6	1018.3	1011.8	1005.3
120°	1118.6	1136.3	1118.6	1118.6	1111.3
122.5°	1215.6	1238.3	1227.0	1220.5	1215.6
125°	1317.6	1337.8	1331.3	1324.0	1321.6
127.5°	1417.0	1442.1	1433.2	1423.5	1417.0
130°	1510.0	1539.2	1535.1	1530.2	1521.4
132.5°	1614.4	1637.0	1638.6	1627.3	1620.9
135°	1704.1	1729.2	1734.1	1731.6	1725.2
137.5°	1804.4	1824.7	1828.7	1827.1	1817.4
140°	1892.6	1912.8	1924.1	1924.1	1915.2
142.5°	1983.2	2003.4	2009.9	2012.3	2003.4
145°	2069.0	2085.1	2098.0	2100.5	2091.6
147.5°	2145.8	2166.0	2175.7	2179.7	2170.9
150°	2225.1	2238.8	2247.7	2254.9	2247.7
152.5°	2295.4	2309.1	2320.4	2329.4	2320.4
155°	2365.8	2372.2	2379.5	2390.9	2383.6
157.5°	2426.4	2431.3	2435.3	2451.5	2440.1
160°	2480.6	2485.5	2487.9	2501.6	2491.9
162.5°	2530.7	2530.7	2533.2	2548.5	2537.2
165°	2573.6	2571.2	2571.2	2587.4	2576.1
167.5°	2612.4	2605.2	2605.2	2621.3	2610.0
170°	2641.6	2635.1	2632.7	2648.8	2635.1
172.5°	2661.7	2655.3	2652.9	2669.1	2655.3
175°	2678.0	2671.4	2666.6	2682.9	2669.1
177.5°	2686.8	2680.4	2675.5	2689.3	2675.5
180°	2682.9	2682.9	2682.9	2682.9	2682.9

TEST NUMBER: P902660

CATALOG NUMBER: DFN2DIP-HX3F0-080D090US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.47	12.33	12.43	13.30	14.58	11.04	11.90	12.00	12.87	14.15
	3H	13.12	13.89	14.09	14.88	16.17	12.65	13.42	13.62	14.41	15.70
	4H	13.70	14.43	14.69	15.42	16.72	13.24	13.97	14.22	14.95	16.26
	6H	14.10	14.77	15.09	15.76	17.08	13.63	14.30	14.62	15.29	16.61
	8H	14.20	14.84	15.20	15.85	17.16	13.73	14.37	14.73	15.38	16.69
	12H	14.24	14.85	15.25	15.86	17.19	13.77	14.38	14.77	15.38	16.72
4H	2H	11.93	12.66	12.92	13.64	14.95	11.58	12.32	12.57	13.30	14.60
	3H	13.78	14.39	14.78	15.41	16.73	13.39	14.00	14.39	15.02	16.34
	4H	14.49	15.05	15.50	16.06	17.40	14.09	14.65	15.10	15.66	17.00
	6H	15.00	15.48	16.02	16.51	17.85	14.60	15.08	15.61	16.11	17.45
	8H	15.15	15.60	16.17	16.62	17.97	14.74	15.19	15.76	16.21	17.57
	12H	15.22	15.62	16.25	16.66	18.02	14.80	15.20	15.84	16.24	17.60
8H	4H	14.69	15.13	15.70	16.16	17.51	14.33	14.78	15.35	15.80	17.15
	6H	15.31	15.68	16.35	16.75	18.10	14.95	15.32	15.99	16.39	17.74
	8H	15.52	15.85	16.57	16.90	18.27	15.16	15.49	16.21	16.54	17.91
	12H	15.65	15.94	16.70	16.98	18.40	15.27	15.56	16.33	16.60	18.02
12H	4H	14.67	15.08	15.71	16.12	17.47	14.32	14.73	15.36	15.77	17.12
	6H	15.34	15.66	16.39	16.72	18.08	14.99	15.32	16.04	16.37	17.74
	8H	15.57	15.86	16.63	16.91	18.32	15.22	15.51	16.27	16.55	17.97