

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908099

Luminaire Tested: DFN2DIP-HX3F0-080D040US840-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908099
REPORT IS A COMBINATION OF REPORTS P900745 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-080D040US840-FLLONL
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11997.2 lumens
Efficiency: N/A
Efficacy: 109.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 109.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908099

CATALOG NUMBER: DFN2DIP-HX3F0-080D040US840-FLLONL

Luminous Intensity Polar Plot

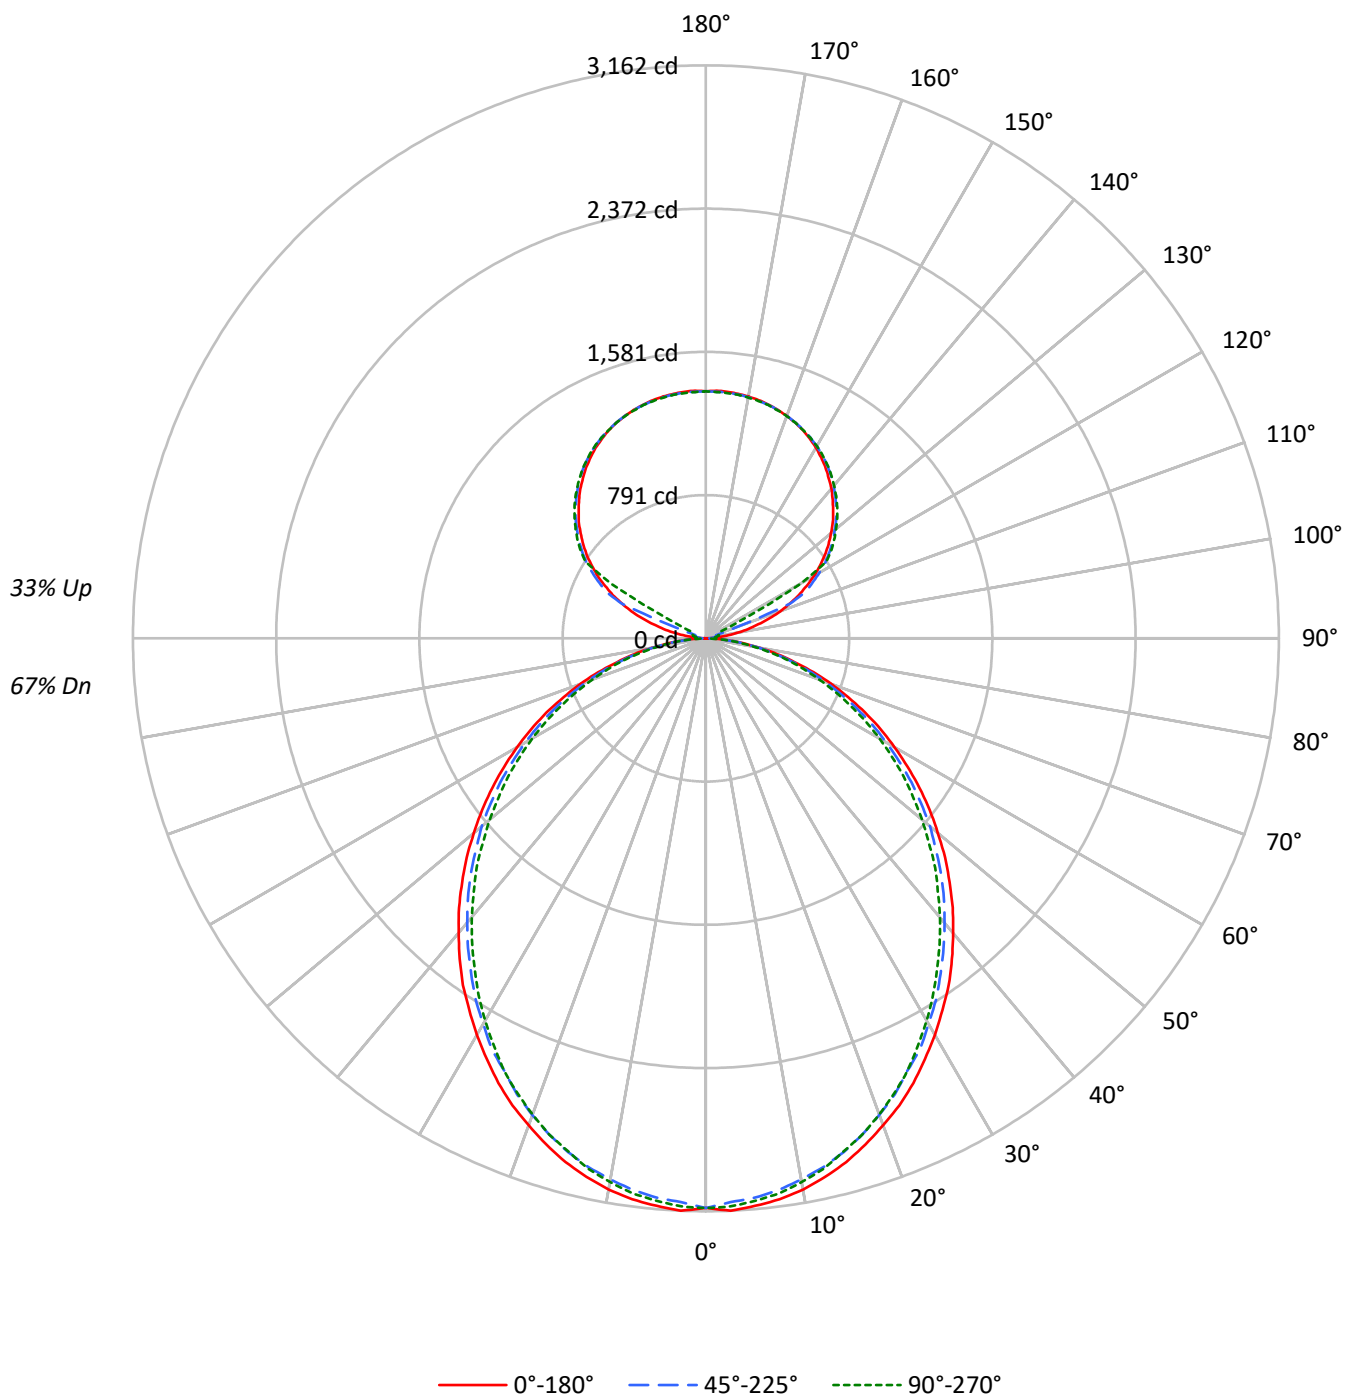

TEST NUMBER: P908099

CATALOG NUMBER: DFN2DIP-HX3F0-080D040US840-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	71	71	71
1	102	97	93	90	95	92	88	85	81	79	76	72	70	68	63	62	60
2	92	85	79	73	87	80	75	70	71	67	63	63	60	57	56	53	51
3	84	75	67	61	79	71	64	58	63	58	53	56	52	48	49	46	43
4	77	66	58	52	72	63	55	50	56	50	45	50	45	41	44	40	37
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	33
6	66	53	45	39	62	50	43	37	45	39	34	41	35	32	36	32	29
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	26
8	56	44	36	30	53	42	34	29	38	31	27	34	29	25	30	26	23
9	53	40	32	27	50	38	31	26	35	29	24	31	26	23	28	24	21
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3641	3641	3641
5°	3645	3588	3613
10°	3614	3537	3562
15°	3560	3476	3483
20°	3486	3393	3403
25°	3413	3294	3311
30°	3322	3201	3194
35°	3235	3092	3070
40°	3129	2982	2952
45°	3023	2872	2832
50°	2906	2756	2692
55°	2785	2622	2563
60°	2647	2463	2416
65°	2497	2298	2242
70°	2305	2097	2054
75°	2040	1856	1877
80°	1720	1548	1545
85°	1220	1025	1002

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3023 cd/sqm

TEST NUMBER: P908099

CATALOG NUMBER: DFN2DIP-HX3F0-080D040US840-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	295.9	2.5
10°-20°	832.5	6.9
20°-30°	1223.4	10.2
30°-40°	1420.9	11.8
40°-50°	1419.1	11.8
50°-60°	1237.5	10.3
60°-70°	914.7	7.6
70°-80°	517.6	4.3
80°-90°	139.0	1.2
90°-100°	44.9	0.4
100°-110°	167.6	1.4
110°-120°	444.4	3.7
120°-130°	737.1	6.1
130°-140°	783.0	6.5
140°-150°	727.7	6.1
150°-160°	585.1	4.9
160°-170°	377.0	3.1
170°-180°	129.8	1.1
0°-30°	2351.8	19.6
0°-40°	3772.7	31.4
0°-60°	6429.3	53.6
0°-90°	8000.6	66.7
90°-120°	656.9	5.5
90°-150°	2904.8	24.2
90°-180°	3997.0	33.3
0°-180°	11997.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3144	3144	3144	3144	3144	
5°	3144	3132	3098	3122	3117	298
15°	2992	2975	2935	2947	2932	843
25°	2708	2684	2633	2639	2633	1246
35°	2337	2306	2258	2240	2225	1459
45°	1902	1880	1835	1802	1790	1467
55°	1439	1421	1384	1348	1333	1287
65°	970	952	922	895	880	959
75°	508	502	487	469	475	542
85°	124	121	118	109	106	138
90°	1	12	20	25	27	11
95°	64	32	38	43	42	76
105°	300	330	60	71	75	320
115°	567	584	609	152	81	558
125°	802	815	834	840	843	715
135°	992	1008	1017	1027	1025	767
145°	1151	1150	1167	1174	1169	720
155°	1268	1259	1271	1276	1269	584
165°	1336	1330	1333	1340	1333	377
175°	1366	1359	1361	1368	1358	130
180°	1363	1363	1363	1363	1363	

TEST NUMBER: P908099

CATALOG NUMBER: DFN2DIP-HX3F0-080D040US840-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3143.5	3143.5	3143.5	3143.5	3143.5
2.5°	3161.8	3146.7	3113.4	3143.5	3137.8
5°	3143.5	3131.7	3098.4	3122.4	3116.6
7.5°	3122.4	3104.4	3071.1	3095.4	3089.4
10°	3089.4	3068.2	3031.9	3056.0	3047.1
12.5°	3043.8	3025.9	2989.6	3004.7	2998.6
15°	2992.5	2974.6	2935.1	2947.3	2932.2
17.5°	2929.0	2911.0	2871.6	2886.7	2871.6
20°	2859.4	2841.5	2799.1	2808.1	2796.2
22.5°	2790.2	2762.9	2723.4	2723.4	2717.3
25°	2708.4	2684.3	2633.0	2638.8	2633.0
27.5°	2617.6	2596.5	2557.3	2548.3	2533.2
30°	2527.2	2502.7	2457.6	2448.6	2436.4
32.5°	2430.3	2412.4	2363.9	2345.6	2333.5
35°	2336.6	2306.5	2258.1	2239.8	2224.7
37.5°	2230.8	2203.5	2155.2	2133.9	2118.9
40°	2122.1	2097.7	2049.3	2022.4	2010.1
42.5°	2016.3	1991.9	1943.8	1913.3	1895.4
45°	1901.5	1880.3	1834.7	1801.7	1789.6
47.5°	1789.6	1768.4	1719.9	1686.6	1668.6
50°	1671.5	1656.5	1614.1	1571.8	1556.7
52.5°	1556.7	1535.5	1496.4	1463.1	1441.9
55°	1439.0	1420.7	1384.5	1348.3	1333.1
57.5°	1321.0	1306.0	1266.5	1230.2	1218.0
60°	1203.0	1191.1	1148.7	1115.4	1106.4
62.5°	1088.1	1067.0	1036.8	1006.7	994.5
65°	970.5	952.2	922.0	894.7	879.7
67.5°	849.5	834.1	807.2	786.1	773.9
70°	737.6	725.4	698.2	677.0	665.1
72.5°	622.8	610.7	595.5	574.4	565.4
75°	507.7	501.9	486.6	468.6	474.6
77.5°	405.1	392.8	386.8	377.8	368.8
80°	302.5	299.2	293.2	284.2	278.0
82.5°	205.6	205.6	202.7	190.5	190.5
85°	123.8	120.9	118.1	108.8	105.8
87.5°	54.5	48.5	42.3	33.3	30.2
90°	0.9	11.8	19.7	24.7	26.6
92.5°	24.7	20.7	23.6	25.7	26.6
95°	64.0	31.5	38.4	43.4	42.4
97.5°	115.4	34.5	50.3	53.3	54.2
100°	174.6	39.5	56.2	64.0	66.0
102.5°	239.6	237.8	58.2	69.0	72.0
105°	299.8	329.5	60.2	71.0	74.9
107.5°	369.9	394.6	62.2	73.0	77.0
110°	437.1	457.7	172.7	74.0	77.9

TEST NUMBER: P908099

CATALOG NUMBER: DFN2DIP-HX3F0-080D040US840-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	500.2	517.9	501.1	75.9	79.0
115°	567.1	583.9	608.6	151.9	81.0
117.5°	625.4	645.1	662.0	520.8	262.4
120°	690.5	705.3	723.1	735.0	601.8
122.5°	745.7	761.5	781.3	787.2	788.2
125°	801.9	814.9	833.5	840.5	843.4
127.5°	853.2	867.1	881.9	891.8	892.7
130°	901.6	917.5	928.2	939.1	938.2
132.5°	950.9	963.8	974.6	983.5	982.6
135°	992.4	1008.2	1017.0	1026.9	1025.0
137.5°	1035.7	1047.5	1057.5	1067.3	1064.4
140°	1078.1	1086.1	1096.9	1105.8	1100.9
142.5°	1113.8	1120.6	1133.5	1141.2	1136.4
145°	1151.2	1150.2	1166.9	1173.9	1168.9
147.5°	1183.7	1180.7	1197.5	1202.4	1198.6
150°	1215.3	1208.4	1224.3	1230.1	1225.2
152.5°	1241.9	1234.1	1248.8	1254.8	1247.9
155°	1267.6	1258.8	1270.6	1276.5	1268.6
157.5°	1288.3	1280.4	1289.4	1296.3	1288.3
160°	1306.1	1300.1	1306.1	1311.9	1305.0
162.5°	1321.8	1316.0	1320.9	1327.8	1318.9
165°	1335.6	1329.8	1332.7	1339.6	1332.7
167.5°	1346.6	1340.5	1343.6	1350.5	1341.6
170°	1355.4	1349.5	1351.4	1358.4	1349.5
172.5°	1361.3	1355.4	1357.5	1364.3	1355.4
175°	1366.1	1359.3	1361.3	1368.2	1358.4
177.5°	1368.2	1361.3	1362.3	1369.3	1360.4
180°	1363.3	1363.3	1363.3	1363.3	1363.3

TEST NUMBER: P908099

CATALOG NUMBER: DFN2DIP-HX3F0-080D040US840-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.13	14.17	13.93	14.99	16.00	12.70	13.74	13.50	14.56	15.57
	3H	14.80	15.73	15.61	16.56	17.60	14.33	15.26	15.14	16.09	17.13
	4H	15.39	16.26	16.22	17.10	18.15	14.92	15.80	15.75	16.64	17.69
	6H	15.79	16.60	16.63	17.45	18.51	15.32	16.13	16.16	16.98	18.04
	8H	15.90	16.67	16.75	17.53	18.60	15.43	16.20	16.28	17.06	18.13
	12H	15.95	16.68	16.80	17.54	18.63	15.47	16.21	16.33	17.07	18.16
4H	2H	13.61	14.49	14.44	15.33	16.38	13.27	14.15	14.10	14.98	16.04
	3H	15.48	16.22	16.33	17.09	18.16	15.09	15.83	15.94	16.70	17.77
	4H	16.20	16.87	17.06	17.74	18.83	15.80	16.46	16.66	17.33	18.43
	6H	16.72	17.29	17.59	18.19	19.28	16.31	16.89	17.19	17.78	18.88
	8H	16.87	17.41	17.74	18.29	19.40	16.46	17.00	17.34	17.89	19.00
	12H	16.94	17.43	17.84	18.34	19.45	16.53	17.01	17.42	17.92	19.04
8H	4H	16.41	16.95	17.28	17.83	18.94	16.05	16.59	16.93	17.48	18.59
	6H	17.04	17.48	17.94	18.41	19.52	16.68	17.12	17.58	18.05	19.16
	8H	17.25	17.65	18.17	18.57	19.70	16.89	17.28	17.80	18.21	19.33
	12H	17.39	17.74	18.31	18.65	19.83	17.01	17.36	17.93	18.27	19.45
12H	4H	16.40	16.89	17.30	17.79	18.91	16.05	16.54	16.95	17.44	18.56
	6H	17.07	17.46	17.98	18.39	19.51	16.72	17.11	17.63	18.04	19.16
	8H	17.31	17.66	18.23	18.57	19.75	16.96	17.31	17.87	18.22	19.40