

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910726

Luminaire Tested: DFN2DIP-HX3F0-040D030US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910726
REPORT IS A COMBINATION OF REPORTS P899203 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-040D030US850-FLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7336.0 lumens
Efficiency: N/A
Efficacy: 127.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 57.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910726

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US850-FLLFLL

Luminous Intensity Polar Plot

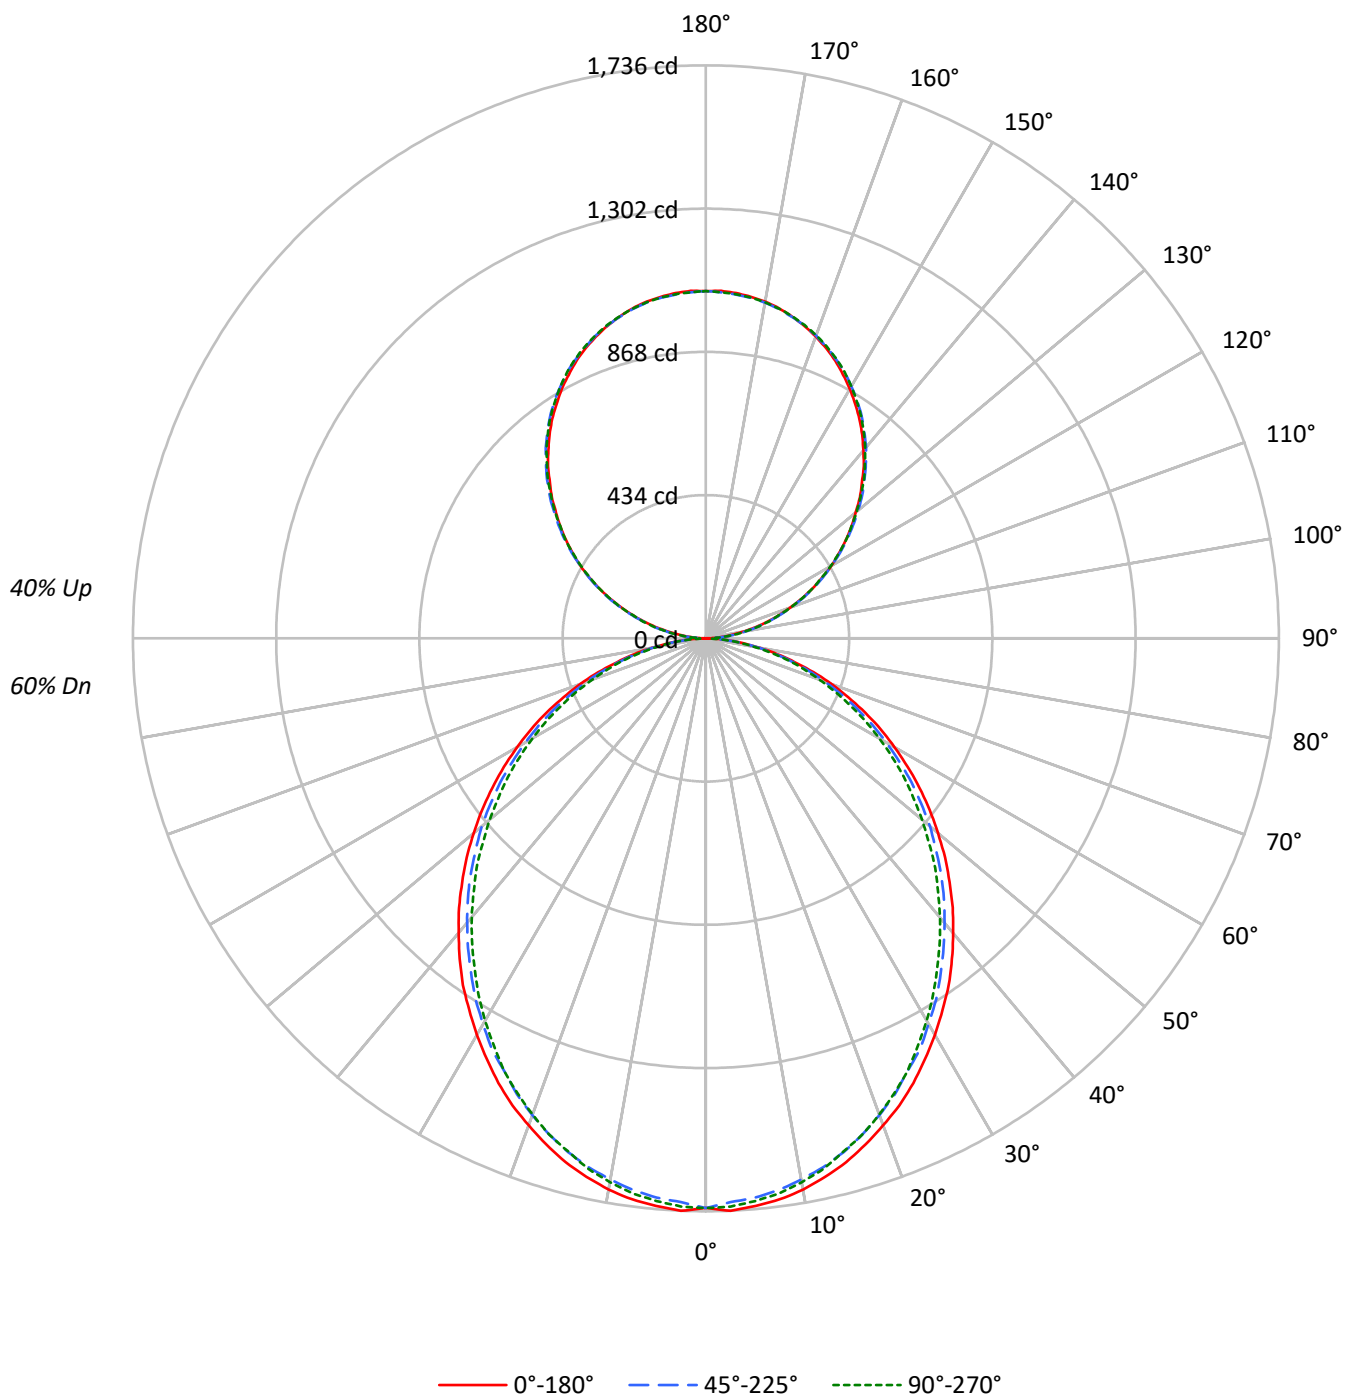

TEST NUMBER: P910726

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US850-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65
1	100	96	92	88	93	89	86	83	78	75	73	67	66	64	58	56	55
2	91	84	77	72	85	78	73	68	68	64	61	59	56	53	51	48	46
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	45	42	40
4	76	65	57	51	71	61	54	48	54	48	43	47	42	39	40	37	34
5	70	58	50	44	65	55	47	42	48	42	38	42	37	34	36	33	30
6	64	52	44	38	60	49	42	36	43	37	33	38	33	29	33	29	26
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	26	23
8	55	43	35	30	52	40	33	28	36	30	26	32	27	23	28	24	21
9	52	39	32	26	48	37	30	25	33	27	23	29	24	21	26	22	19
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1999	1999	1999
5°	2002	1970	1984
10°	1985	1942	1956
15°	1954	1909	1913
20°	1914	1863	1869
25°	1874	1809	1818
30°	1824	1758	1754
35°	1776	1698	1686
40°	1718	1638	1621
45°	1660	1577	1555
50°	1596	1513	1478
55°	1529	1440	1408
60°	1453	1352	1326
65°	1371	1262	1231
70°	1266	1151	1128
75°	1120	1019	1031
80°	944	849	849
85°	670	562	550

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1660 cd/sqm

TEST NUMBER: P910726

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US850-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.5	2.2
10°-20°	457.1	6.2
20°-30°	671.7	9.2
30°-40°	780.2	10.6
40°-50°	779.2	10.6
50°-60°	679.5	9.3
60°-70°	502.3	6.8
70°-80°	284.2	3.9
80°-90°	78.0	1.1
90°-100°	65.1	0.9
100°-110°	206.9	2.8
110°-120°	354.0	4.8
120°-130°	465.6	6.3
130°-140°	522.6	7.1
140°-150°	512.5	7.0
150°-160°	429.9	5.9
160°-170°	285.1	3.9
170°-180°	99.7	1.4
0°-30°	1291.3	17.6
0°-40°	2071.5	28.2
0°-60°	3530.2	48.1
0°-90°	4394.6	59.9
90°-120°	626.0	8.5
90°-150°	2126.7	29.0
90°-180°	2941.0	40.1
0°-180°	7336.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1726	1726	1726	1726	1726	
5°	1726	1720	1701	1714	1711	164
15°	1643	1633	1612	1618	1610	463
25°	1487	1474	1446	1449	1446	684
35°	1283	1266	1240	1230	1222	801
45°	1044	1032	1007	989	983	806
55°	790	780	760	740	732	706
65°	533	523	506	491	483	527
75°	279	276	267	257	261	298
85°	68	66	65	60	58	76
90°	1	11	31	29	30	7
95°	46	55	57	57	55	52
105°	191	194	195	197	197	202
115°	355	360	359	358	355	351
125°	517	525	522	519	518	462
135°	668	678	680	679	677	517
145°	812	818	823	824	820	507
155°	928	930	933	938	935	427
165°	1009	1008	1008	1015	1010	285
175°	1050	1048	1046	1052	1047	100
180°	1052	1052	1052	1052	1052	



TEST NUMBER: P910726

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1726.0	1726.0	1726.0	1726.0	1726.0
2.5°	1736.1	1727.8	1709.5	1726.0	1722.9
5°	1726.0	1719.5	1701.2	1714.4	1711.3
7.5°	1714.4	1704.5	1686.2	1699.7	1696.3
10°	1696.3	1684.7	1664.8	1678.0	1673.0
12.5°	1671.3	1661.4	1641.5	1649.9	1646.4
15°	1643.1	1633.2	1611.6	1618.3	1610.0
17.5°	1608.3	1598.4	1576.8	1585.0	1576.8
20°	1570.0	1560.1	1537.0	1541.8	1535.4
22.5°	1532.0	1517.0	1495.4	1495.4	1492.0
25°	1487.1	1473.9	1445.7	1448.9	1445.7
27.5°	1437.3	1425.6	1404.2	1399.2	1391.0
30°	1387.6	1374.3	1349.4	1344.4	1337.8
32.5°	1334.5	1324.6	1298.0	1288.0	1281.2
35°	1283.0	1266.5	1239.9	1229.9	1221.6
37.5°	1224.9	1209.9	1183.3	1171.8	1163.5
40°	1165.2	1151.8	1125.2	1110.4	1103.8
42.5°	1107.1	1093.7	1067.3	1050.6	1040.7
45°	1044.0	1032.5	1007.4	989.3	982.6
47.5°	982.6	970.9	944.4	926.1	916.3
50°	917.8	909.5	886.3	863.0	854.7
52.5°	854.7	843.2	821.7	803.4	791.7
55°	790.2	780.1	760.2	740.3	732.1
57.5°	725.3	717.1	695.3	675.5	668.8
60°	660.5	654.0	630.8	612.5	607.5
62.5°	597.5	585.9	569.4	552.7	546.1
65°	532.9	522.8	506.3	491.3	483.1
67.5°	466.4	458.0	443.3	431.6	425.0
70°	405.0	398.4	383.4	371.7	365.2
72.5°	342.0	335.3	327.0	315.4	310.4
75°	278.8	275.6	267.2	257.3	260.6
77.5°	222.4	215.7	212.4	207.4	202.5
80°	166.0	164.2	160.9	156.0	152.7
82.5°	112.9	112.9	111.3	104.6	104.6
85°	68.0	66.4	64.8	59.7	58.1
87.5°	29.9	26.6	23.3	18.3	16.5
90°	1.0	11.4	31.1	29.2	30.2
92.5°	19.6	26.6	27.6	28.5	28.5
95°	46.4	55.2	56.8	56.8	55.2
97.5°	77.1	85.3	88.8	88.8	88.8
100°	112.6	119.9	122.4	122.4	121.5
102.5°	150.0	155.5	158.9	159.9	158.9
105°	191.0	193.5	195.4	197.0	197.0
107.5°	231.6	235.3	235.3	236.0	231.6
110°	270.9	276.0	276.0	276.0	273.5

TEST NUMBER: P910726

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	313.4	318.8	317.8	315.3	313.4
115°	355.3	360.3	358.8	357.9	355.3
117.5°	396.8	403.8	399.4	396.8	394.2
120°	438.7	445.7	438.7	438.7	435.8
122.5°	476.8	485.6	481.2	478.6	476.8
125°	516.8	524.7	522.1	519.2	518.3
127.5°	555.7	565.6	562.2	558.3	555.7
130°	592.2	603.6	602.1	600.2	596.6
132.5°	633.1	642.0	642.7	638.2	635.7
135°	668.4	678.2	680.1	679.2	676.6
137.5°	707.7	715.6	717.2	716.6	712.8
140°	742.3	750.2	754.7	754.7	751.1
142.5°	777.9	785.7	788.3	789.3	785.7
145°	811.5	817.8	822.9	823.8	820.3
147.5°	841.6	849.5	853.3	854.9	851.4
150°	872.7	878.1	881.5	884.4	881.5
152.5°	900.3	905.6	910.0	913.6	910.0
155°	927.9	930.3	933.2	937.7	934.9
157.5°	951.6	953.5	955.2	961.5	957.1
160°	972.9	974.8	975.8	981.1	977.4
162.5°	992.6	992.6	993.6	999.5	995.1
165°	1009.4	1008.4	1008.4	1014.7	1010.3
167.5°	1024.6	1021.7	1021.7	1028.0	1023.6
170°	1036.0	1033.5	1032.6	1038.9	1033.5
172.5°	1043.9	1041.5	1040.5	1046.8	1041.5
175°	1050.3	1047.8	1045.9	1052.2	1046.8
177.5°	1053.8	1051.2	1049.3	1054.8	1049.3
180°	1052.2	1052.2	1052.2	1052.2	1052.2

TEST NUMBER: P910726

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.50	11.46	11.37	12.35	13.47	10.07	11.03	10.94	11.92	13.04
	3H	12.16	13.02	13.04	13.92	15.07	11.69	12.55	12.57	13.45	14.60
	4H	12.75	13.56	13.64	14.47	15.62	12.28	13.09	13.17	14.00	15.15
	6H	13.15	13.90	14.05	14.81	15.98	12.68	13.43	13.58	14.34	15.51
	8H	13.25	13.97	14.17	14.89	16.06	12.78	13.50	13.70	14.42	15.59
	12H	13.30	13.98	14.22	14.90	16.10	12.83	13.51	13.75	14.43	15.62
4H	2H	10.97	11.79	11.87	12.69	13.85	10.63	11.44	11.53	12.35	13.50
	3H	12.84	13.52	13.75	14.45	15.62	12.45	13.13	13.36	14.06	15.24
	4H	13.55	14.17	14.47	15.10	16.30	13.15	13.77	14.07	14.70	15.90
	6H	14.06	14.60	15.00	15.55	16.75	13.66	14.19	14.59	15.15	16.35
	8H	14.21	14.71	15.15	15.66	16.87	13.80	14.30	14.74	15.25	16.47
	12H	14.29	14.74	15.24	15.70	16.92	13.87	14.32	14.83	15.29	16.50
8H	4H	13.75	14.25	14.69	15.20	16.41	13.39	13.89	14.33	14.84	16.05
	6H	14.38	14.79	15.34	15.78	16.99	14.02	14.43	14.98	15.42	16.63
	8H	14.59	14.96	15.57	15.94	17.17	14.23	14.59	15.20	15.57	16.80
	12H	14.72	15.05	15.70	16.02	17.30	14.35	14.67	15.32	15.64	16.92
12H	4H	13.74	14.19	14.70	15.16	16.38	13.39	13.84	14.35	14.81	16.03
	6H	14.41	14.77	15.38	15.75	16.98	14.06	14.42	15.03	15.40	16.63
	8H	14.65	14.97	15.62	15.94	17.22	14.29	14.62	15.27	15.59	16.87