

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913455

Luminaire Tested: DFN2DIP-HX3F0-040D030US927-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913455
REPORT IS A COMBINATION OF REPORTS P900723 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-040D030US927-FLLONL
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5489.8 lumens
Efficiency: N/A
Efficacy: 95.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 57.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913455

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US927-FLLONL

Luminous Intensity Polar Plot

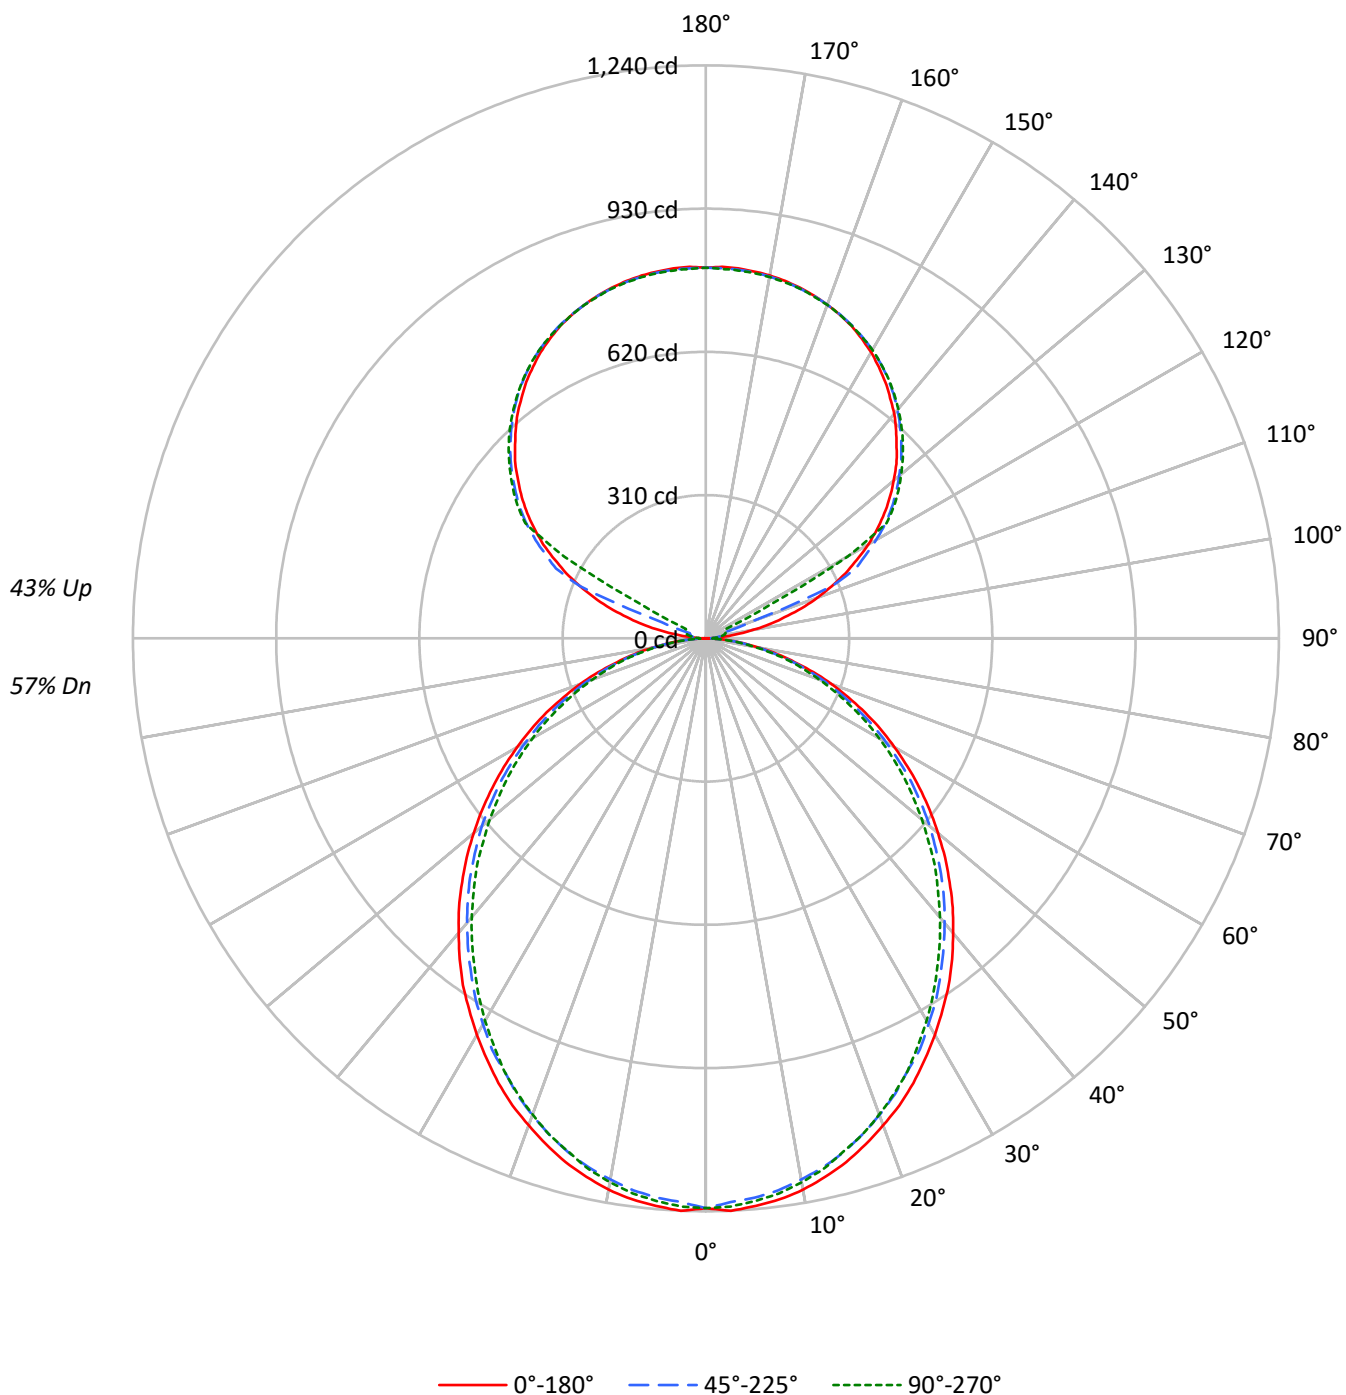

TEST NUMBER: P913455

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US927-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	109	109	109	109		101	101	101	101		87	87	87		74	74	74		63	63	63
1	99	95	91	88		92	89	85	82		77	74	72		66	64	62		55	54	53
2	91	83	77	72		84	77	72	67		67	63	59		58	55	52		49	47	45
3	83	73	66	60		77	68	62	56		59	54	50		51	47	44		43	40	38
4	76	65	57	50		70	61	53	48		53	47	43		45	41	38		39	35	33
5	69	58	49	43		64	54	47	41		47	41	37		41	36	33		35	31	29
6	64	52	44	38		59	49	41	36		43	37	32		37	32	29		32	28	25
7	59	47	39	33		55	44	37	31		39	33	28		34	29	25		29	25	22
8	55	43	35	29		51	40	33	28		35	29	25		31	26	23		27	23	20
9	51	39	31	26		48	37	30	25		32	27	23		28	24	20		25	21	18
10	48	36	28	24		45	34	27	22		30	24	20		26	22	18		23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1428	1428	1428
5°	1430	1407	1417
10°	1418	1387	1397
15°	1396	1364	1366
20°	1367	1331	1335
25°	1339	1292	1299
30°	1303	1256	1253
35°	1269	1213	1204
40°	1227	1170	1158
45°	1186	1126	1111
50°	1140	1081	1056
55°	1092	1028	1005
60°	1038	966	948
65°	979	901	879
70°	904	823	806
75°	800	728	736
80°	674	606	607
85°	479	402	393

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1186 cd/sqm

TEST NUMBER: P913455

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US927-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.0	2.1
10°-20°	326.5	5.9
20°-30°	479.8	8.7
30°-40°	557.3	10.2
40°-50°	556.6	10.1
50°-60°	485.3	8.8
60°-70°	358.8	6.5
70°-80°	203.0	3.7
80°-90°	55.0	1.0
90°-100°	26.5	0.5
100°-110°	98.6	1.8
110°-120°	261.5	4.8
120°-130°	433.7	7.9
130°-140°	460.7	8.4
140°-150°	428.1	7.8
150°-160°	344.2	6.3
160°-170°	221.8	4.0
170°-180°	76.3	1.4
0°-30°	922.4	16.8
0°-40°	1479.7	27.0
0°-60°	2521.7	45.9
0°-90°	3138.4	57.2
90°-120°	386.5	7.0
90°-150°	1709.0	31.1
90°-180°	2351.0	42.8
0°-180°	5489.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1233	1233	1233	1233	1233	
5°	1233	1228	1215	1225	1222	117
15°	1174	1167	1151	1156	1150	331
25°	1062	1053	1033	1035	1033	489
35°	916	905	886	878	873	572
45°	746	738	720	707	702	576
55°	564	557	543	529	523	505
65°	381	373	362	351	345	376
75°	199	197	191	184	186	213
85°	49	48	46	43	42	54
90°	1	7	12	15	16	5
95°	38	18	23	26	25	45
105°	176	194	35	42	44	188
115°	334	344	358	89	48	329
125°	472	479	490	494	496	421
135°	584	593	598	604	603	451
145°	677	677	687	691	688	424
155°	746	741	748	751	746	344
165°	786	782	784	788	784	222
175°	804	800	801	805	799	76
180°	802	802	802	802	802	

TEST NUMBER: P913455

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US927-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1233.0	1233.0	1233.0	1233.0	1233.0
2.5°	1240.2	1234.2	1221.1	1233.0	1230.7
5°	1233.0	1228.3	1215.2	1224.6	1222.4
7.5°	1224.6	1217.6	1204.5	1214.1	1211.7
10°	1211.7	1203.4	1189.2	1198.6	1195.1
12.5°	1193.8	1186.8	1172.6	1178.5	1176.1
15°	1173.7	1166.6	1151.2	1156.0	1150.1
17.5°	1148.8	1141.8	1126.3	1132.2	1126.3
20°	1121.5	1114.4	1097.9	1101.4	1096.8
22.5°	1094.3	1083.6	1068.2	1068.2	1065.8
25°	1062.2	1052.8	1032.7	1035.0	1032.7
27.5°	1026.7	1018.3	1003.1	999.5	993.6
30°	991.2	981.7	963.9	960.4	955.6
32.5°	953.2	946.2	927.2	920.0	915.2
35°	916.5	904.7	885.7	878.5	872.6
37.5°	875.0	864.3	845.3	837.0	831.1
40°	832.3	822.8	803.7	793.2	788.5
42.5°	790.8	781.2	762.4	750.4	743.4
45°	745.8	737.5	719.6	706.7	701.9
47.5°	701.9	693.6	674.6	661.6	654.5
50°	655.6	649.7	633.1	616.5	610.5
52.5°	610.5	602.3	586.9	573.9	565.5
55°	564.4	557.2	543.0	528.8	522.9
57.5°	518.1	512.2	496.7	482.5	477.8
60°	471.8	467.1	450.6	437.5	434.0
62.5°	426.8	418.5	406.7	394.8	390.1
65°	380.6	373.4	361.6	350.9	345.1
67.5°	333.2	327.2	316.6	308.3	303.6
70°	289.3	284.6	273.9	265.5	260.9
72.5°	244.3	239.5	233.6	225.3	221.7
75°	199.2	196.9	190.8	183.8	186.2
77.5°	158.8	154.1	151.7	148.1	144.7
80°	118.6	117.3	114.9	111.5	109.1
82.5°	80.6	80.6	79.5	74.7	74.7
85°	48.6	47.5	46.3	42.6	41.5
87.5°	21.4	19.0	16.6	13.1	11.8
90°	0.6	7.0	11.6	14.6	15.6
92.5°	14.6	12.2	13.9	15.1	15.6
95°	37.7	18.5	22.6	25.6	25.0
97.5°	67.9	20.4	29.5	31.4	31.9
100°	102.7	23.2	33.1	37.7	38.9
102.5°	141.0	139.9	34.2	40.6	42.4
105°	176.4	193.8	35.4	41.7	44.1
107.5°	217.6	232.1	36.6	42.9	45.3
110°	257.1	269.3	101.6	43.6	45.9

TEST NUMBER: P913455

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US927-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	294.3	304.7	294.8	44.7	46.4
115°	333.7	343.6	358.1	89.4	47.6
117.5°	368.0	379.5	389.4	306.4	154.4
120°	406.2	414.9	425.4	432.4	354.0
122.5°	438.7	448.1	459.7	463.1	463.7
125°	471.8	479.3	490.4	494.5	496.2
127.5°	502.0	510.1	518.9	524.7	525.2
130°	530.4	539.8	546.1	552.5	552.0
132.5°	559.4	567.0	573.4	578.6	578.1
135°	583.8	593.2	598.3	604.2	603.0
137.5°	609.3	616.3	622.2	628.0	626.2
140°	634.3	639.0	645.3	650.5	647.7
142.5°	655.3	659.3	666.9	671.5	668.6
145°	677.3	676.7	686.6	690.6	687.7
147.5°	696.4	694.7	704.6	707.4	705.1
150°	715.0	711.0	720.3	723.7	720.8
152.5°	730.6	726.0	734.7	738.2	734.2
155°	745.8	740.6	747.5	751.0	746.4
157.5°	758.0	753.4	758.6	762.6	758.0
160°	768.4	764.9	768.4	771.9	767.8
162.5°	777.7	774.2	777.1	781.2	775.9
165°	785.8	782.4	784.1	788.1	784.1
167.5°	792.2	788.7	790.4	794.6	789.3
170°	797.4	793.9	795.1	799.2	793.9
172.5°	800.9	797.4	798.6	802.6	797.4
175°	803.7	799.7	800.9	804.9	799.2
177.5°	804.9	800.9	801.5	805.6	800.3
180°	802.1	802.1	802.1	802.1	802.1

TEST NUMBER: P913455

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US927-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.10	10.03	10.00	10.95	12.11	8.67	9.60	9.57	10.52	11.68
	3H	10.76	11.60	11.67	12.52	13.71	10.29	11.13	11.20	12.05	13.24
	4H	11.35	12.14	12.27	13.06	14.26	10.88	11.67	11.80	12.60	13.79
	6H	11.74	12.47	12.68	13.41	14.62	11.27	12.00	12.21	12.94	14.15
	8H	11.85	12.54	12.79	13.49	14.70	11.38	12.07	12.32	13.02	14.23
	12H	11.90	12.56	12.84	13.50	14.74	11.42	12.08	12.37	13.03	14.26
4H	2H	9.57	10.36	10.50	11.29	12.49	9.23	10.02	10.15	10.94	12.14
	3H	11.43	12.09	12.37	13.05	14.27	11.04	11.70	11.98	12.66	13.88
	4H	12.15	12.75	13.09	13.70	14.94	11.74	12.34	12.69	13.30	14.54
	6H	12.66	13.18	13.62	14.15	15.39	12.25	12.77	13.21	13.75	14.99
	8H	12.80	13.29	13.77	14.26	15.51	12.40	12.88	13.36	13.85	15.11
	12H	12.88	13.31	13.86	14.30	15.56	12.46	12.90	13.44	13.89	15.14
8H	4H	12.34	12.83	13.31	13.80	15.05	11.99	12.47	12.95	13.44	14.69
	6H	12.97	13.37	13.96	14.38	15.63	12.61	13.01	13.60	14.02	15.27
	8H	13.18	13.54	14.18	14.54	15.81	12.82	13.17	13.82	14.18	15.44
	12H	13.31	13.63	14.31	14.62	15.94	12.94	13.25	13.93	14.24	15.56
12H	4H	12.33	12.77	13.31	13.76	15.02	11.98	12.42	12.96	13.41	14.67
	6H	13.00	13.35	13.99	14.35	15.62	12.65	13.00	13.65	14.01	15.27
	8H	13.24	13.55	14.24	14.54	15.86	12.88	13.20	13.88	14.19	15.51