

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913473

Luminaire Tested: DFN2DIP-HX3F0-040D070US927-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913473
REPORT IS A COMBINATION OF REPORTS P900780 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-040D070US927-RLLONL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8183.2 lumens
Efficiency: N/A
Efficacy: 93.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 87.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913473

CATALOG NUMBER: DFN2DIP-HX3F0-040D070US927-RLLONL

Luminous Intensity Polar Plot

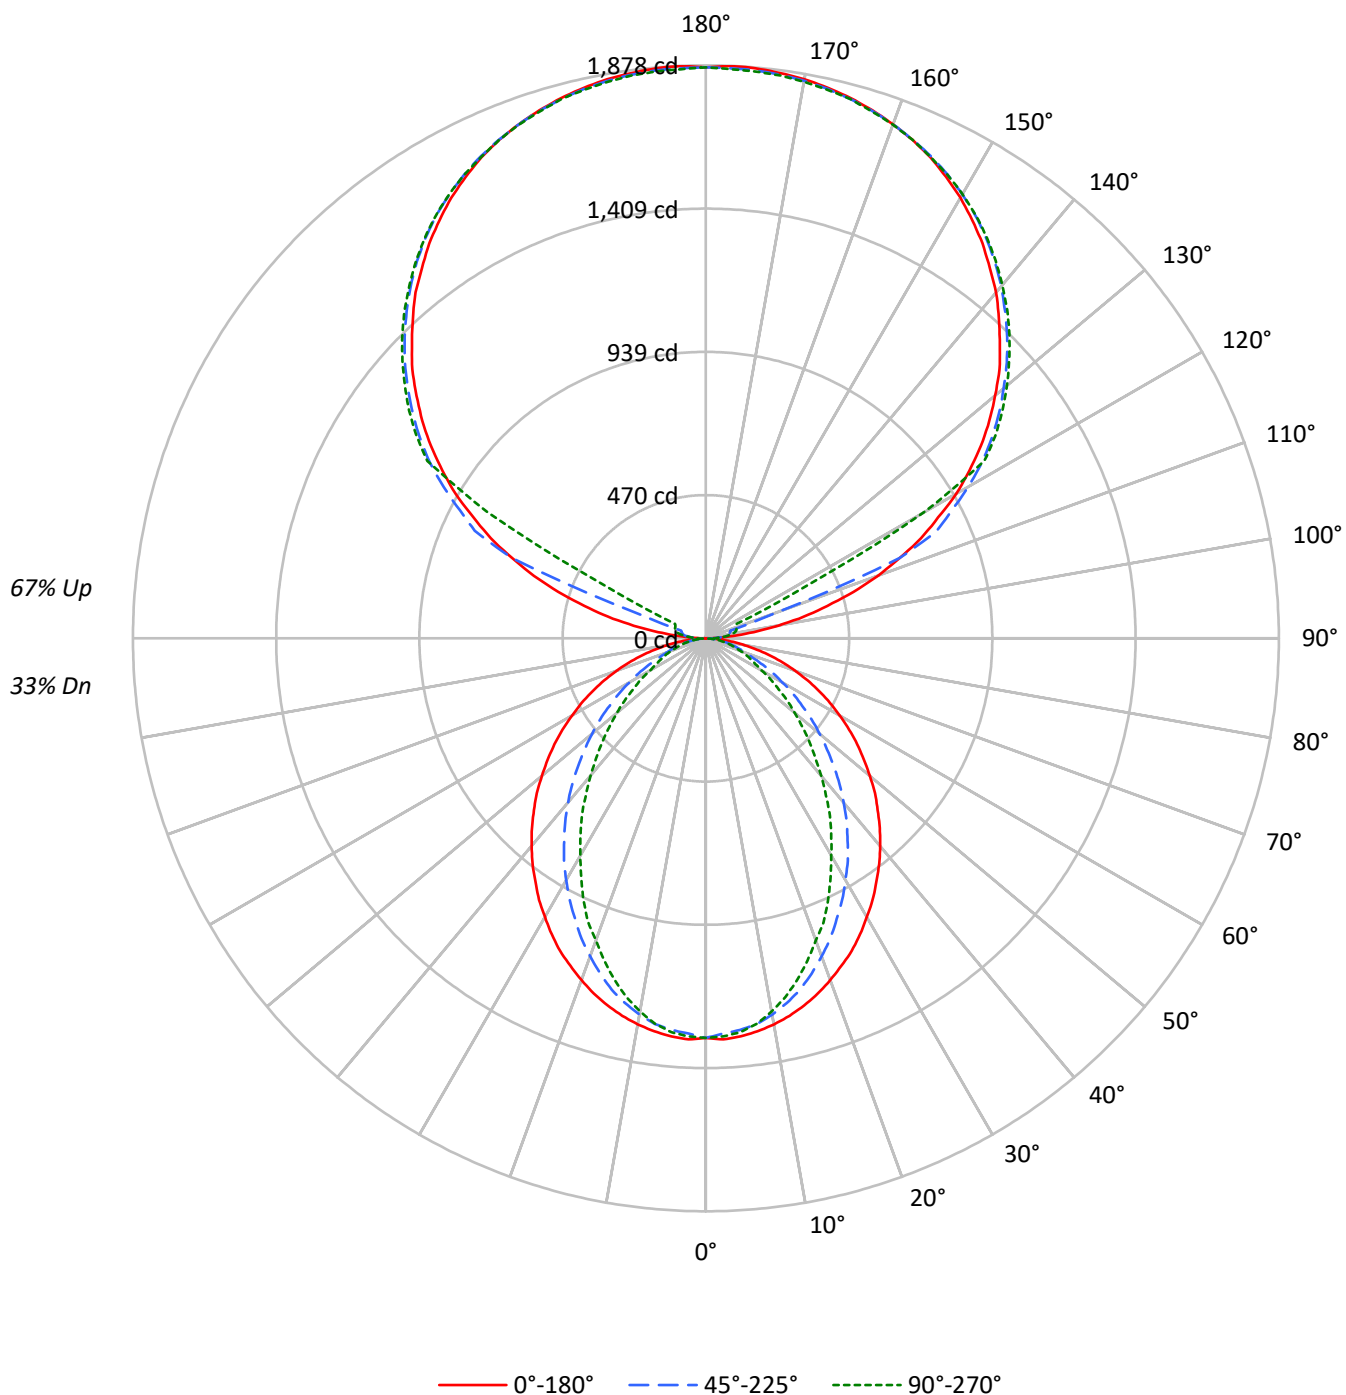

TEST NUMBER: P913473

CATALOG NUMBER: DFN2DIP-HX3F0-040D070US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	87	83	85	81	78	76	65	63	61	50	49	48	36	35	35
2	86	79	73	68	77	72	67	62	57	54	51	44	42	40	32	31	30
3	79	70	63	57	71	63	57	53	51	47	43	39	37	34	29	27	26
4	72	62	54	49	65	56	50	45	45	41	37	35	32	30	26	24	22
5	66	55	47	42	59	50	43	38	41	36	32	32	28	26	24	21	20
6	61	49	42	36	55	45	38	33	37	32	28	29	25	23	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	20	17	16
8	52	41	33	28	47	37	31	26	30	25	22	24	21	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13
10	45	34	27	22	41	31	25	21	26	21	18	20	17	15	16	13	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1517	1517	1517
5°	1519	1492	1502
10°	1503	1462	1452
15°	1482	1412	1376
20°	1454	1345	1282
25°	1425	1269	1192
30°	1387	1192	1078
35°	1349	1109	978
40°	1311	1023	863
45°	1266	928	760
50°	1220	832	658
55°	1172	729	561
60°	1116	622	461
65°	1052	514	414
70°	974	413	373
75°	876	362	338
80°	734	300	290
85°	502	195	213

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1266 cd/sqm

TEST NUMBER: P913473

CATALOG NUMBER: DFN2DIP-HX3F0-040D070US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.7	1.5
10°-20°	336.9	4.1
20°-30°	473.1	5.8
30°-40°	515.7	6.3
40°-50°	473.9	5.8
50°-60°	372.2	4.5
60°-70°	242.3	3.0
70°-80°	124.7	1.5
80°-90°	35.1	0.4
90°-100°	61.7	0.8
100°-110°	230.0	2.8
110°-120°	610.1	7.5
120°-130°	1011.9	12.4
130°-140°	1074.9	13.1
140°-150°	999.0	12.2
150°-160°	803.2	9.8
160°-170°	517.5	6.3
170°-180°	178.1	2.2
0°-30°	932.7	11.4
0°-40°	1448.4	17.7
0°-60°	2294.6	28.0
0°-90°	2696.7	33.0
90°-120°	901.9	11.0
90°-150°	3987.7	48.7
90°-180°	5487.0	67.1
0°-180°	8183.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1310	1310	1310	1310	1310	
5°	1310	1304	1288	1299	1296	124
15°	1246	1233	1192	1170	1158	351
25°	1131	1093	1014	966	948	520
35°	974	914	810	735	709	610
45°	796	717	593	508	480	615
55°	606	513	385	314	292	541
65°	409	313	206	166	162	405
75°	218	135	95	86	85	231
85°	51	26	22	22	22	58
90°	1	16	27	34	36	8
95°	88	43	53	60	58	104
105°	412	452	83	97	103	440
115°	779	802	836	209	111	767
125°	1101	1119	1144	1154	1158	982
135°	1362	1384	1396	1410	1407	1052
145°	1580	1579	1602	1612	1605	988
155°	1740	1728	1744	1752	1742	802
165°	1834	1826	1830	1839	1830	518
175°	1876	1866	1869	1878	1865	178
180°	1871	1871	1871	1871	1871	

TEST NUMBER: P913473

CATALOG NUMBER: DFN2DIP-HX3F0-040D070US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1309.6	1309.6	1309.6	1309.6	1309.6
2.5°	1315.6	1309.6	1296.6	1308.5	1306.1
5°	1309.6	1303.7	1288.2	1298.9	1295.5
7.5°	1298.9	1291.9	1275.3	1279.9	1274.1
10°	1284.8	1276.4	1252.8	1249.1	1242.1
12.5°	1267.0	1256.3	1224.2	1217.2	1204.1
15°	1245.6	1232.6	1192.3	1169.8	1158.0
17.5°	1220.8	1201.7	1151.9	1125.9	1106.9
20°	1192.3	1168.5	1109.3	1079.7	1053.6
22.5°	1161.5	1134.2	1065.4	1025.2	1007.5
25°	1130.7	1092.7	1014.5	966.0	948.1
27.5°	1094.0	1053.6	967.1	911.4	884.1
30°	1054.9	1009.7	914.9	854.5	822.5
32.5°	1016.9	962.3	865.2	794.1	764.4
35°	974.3	913.8	809.5	734.8	708.7
37.5°	932.8	867.5	757.3	675.5	645.9
40°	888.9	817.8	702.8	618.7	587.9
42.5°	843.8	768.0	648.3	560.5	531.0
45°	796.5	717.0	592.6	508.4	480.0
47.5°	751.5	667.3	539.3	455.1	429.0
50°	701.6	617.5	487.1	405.3	380.5
52.5°	653.0	564.1	437.4	359.1	336.6
55°	605.6	513.2	385.2	314.1	291.6
57.5°	557.1	462.2	339.0	272.6	253.7
60°	507.2	412.4	290.3	230.0	211.0
62.5°	458.8	363.9	248.8	192.0	182.6
65°	408.9	312.8	206.2	166.0	162.3
67.5°	361.6	265.5	166.0	145.8	142.2
70°	311.7	219.3	137.4	125.6	120.8
72.5°	264.4	176.6	114.9	105.5	103.1
75°	218.0	135.1	94.8	86.5	85.4
77.5°	171.9	95.9	74.7	69.9	67.5
80°	129.1	68.8	56.8	52.2	52.2
82.5°	90.1	46.3	39.1	36.7	36.7
85°	50.9	26.1	22.5	22.5	22.5
87.5°	19.0	9.4	9.4	8.3	8.3
90°	1.3	16.2	27.0	33.9	36.5
92.5°	33.9	28.4	32.5	35.3	36.5
95°	87.9	43.3	52.8	59.7	58.2
97.5°	158.4	47.5	69.0	73.2	74.5
100°	239.8	54.2	77.2	87.9	90.7
102.5°	329.0	326.5	79.9	94.7	98.9
105°	411.7	452.3	82.6	97.4	102.9
107.5°	507.8	541.6	85.4	100.2	105.7
110°	600.0	628.3	237.0	101.6	106.9

TEST NUMBER: P913473

CATALOG NUMBER: DFN2DIP-HX3F0-040D070US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	686.7	710.9	687.9	104.2	108.4
115°	778.6	801.6	835.5	208.6	111.1
117.5°	858.6	885.6	908.7	714.9	360.2
120°	947.9	968.2	992.7	1008.9	826.1
122.5°	1023.7	1045.4	1072.6	1080.6	1082.0
125°	1100.9	1118.6	1144.3	1153.8	1157.8
127.5°	1171.3	1190.3	1210.7	1224.2	1225.5
130°	1237.7	1259.4	1274.2	1289.2	1287.9
132.5°	1305.4	1323.1	1337.9	1350.1	1348.8
135°	1362.3	1384.0	1396.1	1409.8	1407.1
137.5°	1421.8	1438.1	1451.8	1465.3	1461.3
140°	1480.0	1491.0	1505.8	1518.0	1511.2
142.5°	1528.9	1538.4	1555.9	1566.7	1560.0
145°	1580.4	1579.0	1601.9	1611.5	1604.7
147.5°	1624.9	1621.0	1643.9	1650.7	1645.4
150°	1668.3	1658.9	1680.6	1688.6	1681.9
152.5°	1704.9	1694.1	1714.4	1722.5	1713.1
155°	1740.1	1728.0	1744.2	1752.3	1741.5
157.5°	1768.5	1757.8	1770.0	1779.5	1768.5
160°	1793.0	1784.8	1793.0	1801.0	1791.5
162.5°	1814.6	1806.5	1813.2	1822.7	1810.5
165°	1833.5	1825.5	1829.5	1839.0	1829.5
167.5°	1848.5	1840.2	1844.4	1853.9	1841.7
170°	1860.7	1852.5	1855.2	1864.7	1852.5
172.5°	1868.8	1860.7	1863.4	1872.9	1860.7
175°	1875.5	1866.0	1868.8	1878.2	1864.7
177.5°	1878.2	1868.8	1870.2	1879.7	1867.4
180°	1871.4	1871.4	1871.4	1871.4	1871.4

TEST NUMBER: P913473

CATALOG NUMBER: DFN2DIP-HX3F0-040D070US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.71	7.42	7.81	8.51	10.01	2.69	3.39	3.78	4.48	5.98
	3H	8.37	9.00	9.48	10.10	11.62	3.86	4.49	4.97	5.59	7.11
	4H	8.97	9.57	10.08	10.67	12.19	4.30	4.90	5.42	6.00	7.52
	6H	9.38	9.93	10.50	11.03	12.56	4.61	5.17	5.74	6.27	7.80
	8H	9.50	10.02	10.62	11.14	12.67	4.70	5.22	5.83	6.34	7.87
	12H	9.55	10.05	10.68	11.16	12.71	4.74	5.23	5.87	6.35	7.89
4H	2H	6.71	7.31	7.83	8.41	9.93	3.26	3.86	4.38	4.96	6.48
	3H	8.52	9.02	9.65	10.15	11.68	4.60	5.10	5.72	6.22	7.75
	4H	9.20	9.66	10.33	10.78	12.33	5.13	5.59	6.27	6.71	8.26
	6H	9.70	10.10	10.84	11.24	12.78	5.54	5.94	6.68	7.07	8.62
	8H	9.87	10.24	11.01	11.37	12.93	5.67	6.03	6.80	7.16	8.72
	12H	9.96	10.29	11.11	11.43	13.00	5.72	6.06	6.88	7.20	8.76
8H	4H	9.16	9.53	10.30	10.66	12.22	5.40	5.77	6.54	6.90	8.46
	6H	9.71	10.02	10.87	11.19	12.75	5.91	6.21	7.07	7.38	8.94
	8H	9.92	10.19	11.09	11.34	12.92	6.10	6.36	7.26	7.51	9.09
	12H	10.05	10.28	11.22	11.43	13.05	6.21	6.44	7.37	7.59	9.20
12H	4H	9.11	9.44	10.26	10.58	12.15	5.40	5.73	6.55	6.87	8.44
	6H	9.69	9.95	10.85	11.10	12.68	5.96	6.22	7.12	7.37	8.95
	8H	9.90	10.13	11.07	11.28	12.89	6.16	6.39	7.32	7.54	9.15

END OF REPORT