

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913496

Luminaire Tested: DFN2DIP-HX3F0-050D070US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913496
REPORT IS A COMBINATION OF REPORTS P899262 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-050D070US927-RLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8274.4 lumens
Efficiency: N/A
Efficacy: 84.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 98.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913496
CATALOG NUMBER: DFN2DIP-HX3F0-050D070US927-RLFL

Luminous Intensity Polar Plot

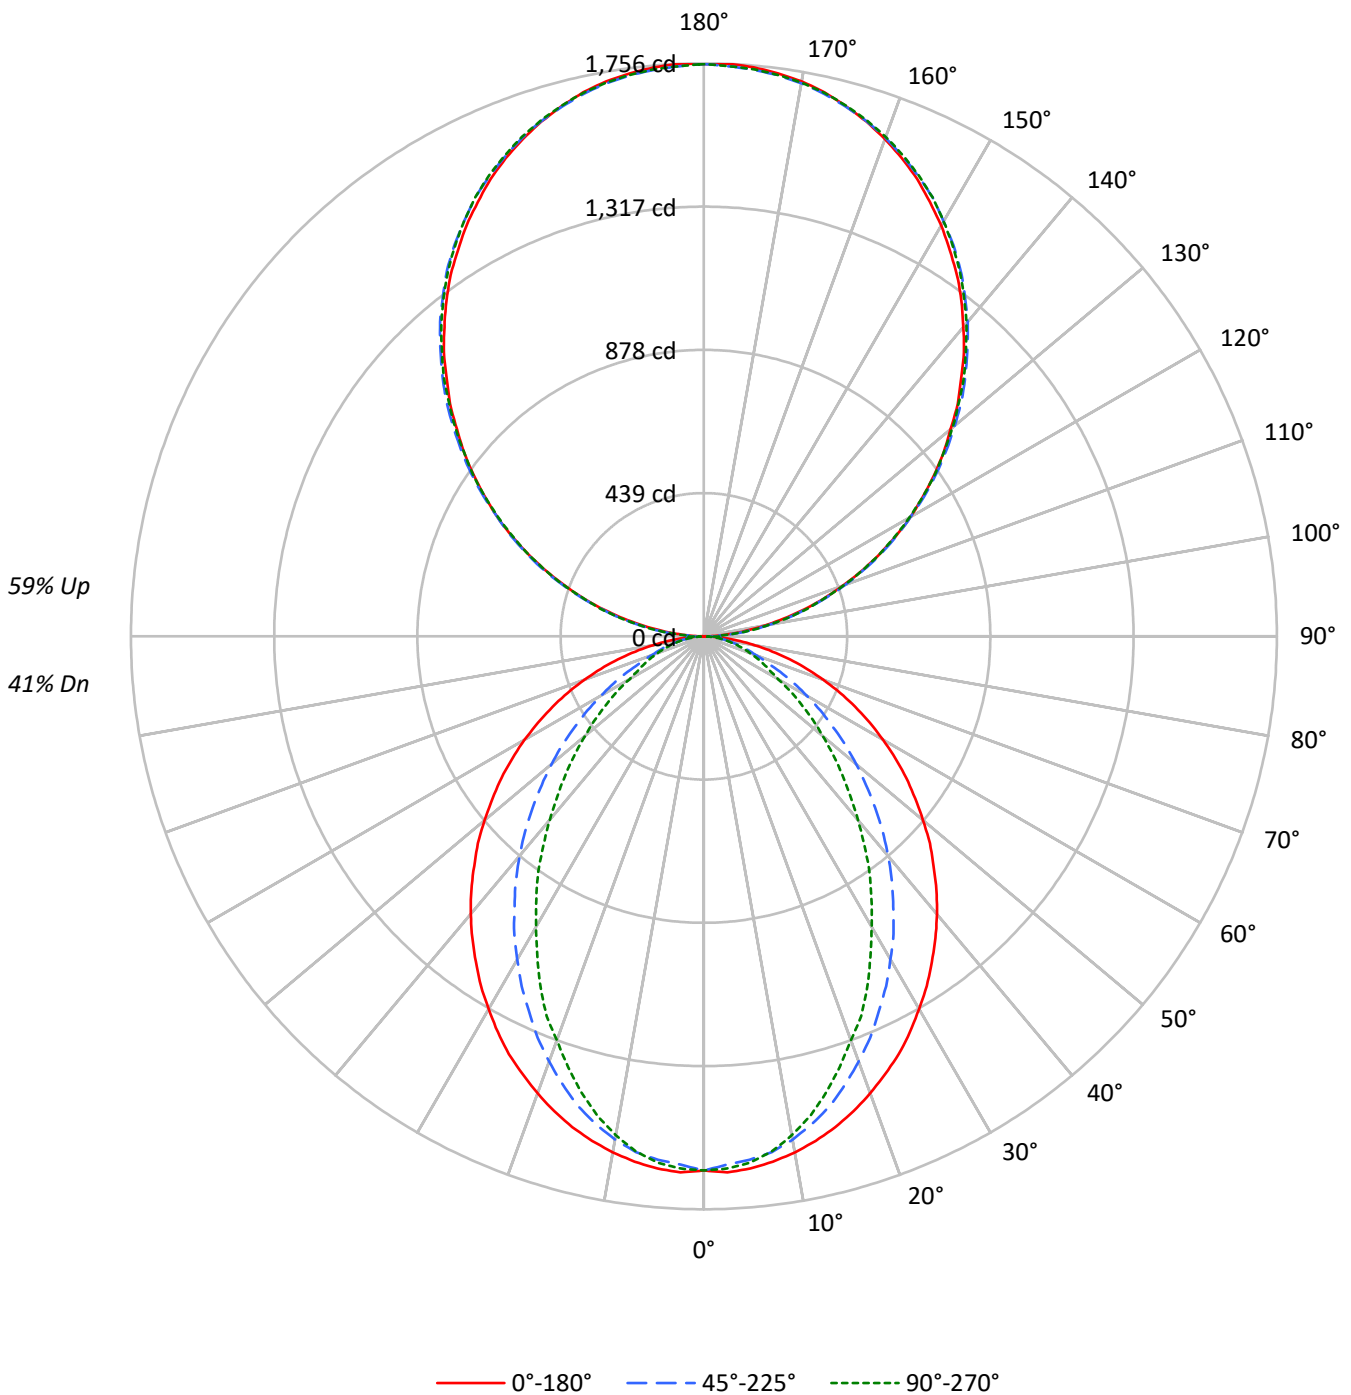



TEST NUMBER: P913496

CATALOG NUMBER: DFN2DIP-HX3F0-050D070US927-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	48	48	48	41
1	96	92	88	85	87	84	81	78	69	67	65	55	54	53	43	42	41	41	41	41	35
2	88	81	75	70	80	74	69	65	61	57	54	49	47	44	38	36	35	35	35	35	30
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30	30	30	30	26
4	74	63	56	50	67	58	52	46	48	43	40	39	36	33	31	28	26	26	26	26	23
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23	23	23	23	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21	21	21	21	18
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	19	19	19	19	16
8	54	42	34	29	49	39	32	27	32	27	24	27	23	20	21	19	17	17	17	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	15	15	15	13
10	47	35	28	23	43	32	26	22	27	23	19	23	19	17	18	16	14	14	14	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1896	1896	1896
5°	1898	1865	1877
10°	1879	1827	1815
15°	1852	1765	1720
20°	1817	1681	1603
25°	1781	1586	1490
30°	1733	1490	1348
35°	1686	1386	1223
40°	1638	1278	1079
45°	1583	1160	949
50°	1525	1040	823
55°	1465	912	701
60°	1395	778	576
65°	1315	643	517
70°	1218	516	467
75°	1095	452	422
80°	918	375	362
85°	628	244	266

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 1649 cd/sqm



TEST NUMBER: P913496

CATALOG NUMBER: DFN2DIP-HX3F0-050D070US927-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.4	1.9
10°-20°	421.2	5.1
20°-30°	591.3	7.1
30°-40°	644.6	7.8
40°-50°	592.4	7.2
50°-60°	465.3	5.6
60°-70°	302.9	3.7
70°-80°	155.9	1.9
80°-90°	44.8	0.5
90°-100°	108.5	1.3
100°-110°	344.8	4.2
110°-120°	590.1	7.1
120°-130°	776.1	9.4
130°-140°	871.1	10.5
140°-150°	854.2	10.3
150°-160°	716.6	8.7
160°-170°	475.2	5.7
170°-180°	166.1	2.0
0°-30°	1165.9	14.1
0°-40°	1810.5	21.9
0°-60°	2868.2	34.7
0°-90°	3371.8	40.7
90°-120°	1043.4	12.6
90°-150°	3544.8	42.8
90°-180°	4903.0	59.3
0°-180°	8274.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1637	1637	1637	1637	1637	
5°	1637	1630	1610	1624	1619	155
15°	1557	1541	1490	1462	1448	439
25°	1413	1366	1268	1207	1185	650
35°	1218	1142	1012	918	886	762
45°	996	896	741	636	600	769
55°	757	641	481	393	364	676
65°	511	391	258	208	203	507
75°	273	169	118	108	107	288
85°	64	33	28	28	28	73
90°	2	19	52	49	50	8
95°	77	92	95	95	92	86
105°	318	322	326	328	328	336
115°	592	601	598	596	592	586
125°	861	874	870	866	864	770
135°	1114	1130	1134	1132	1128	861
145°	1352	1363	1372	1373	1367	845
155°	1546	1551	1556	1563	1558	712
165°	1682	1681	1681	1691	1684	475
175°	1751	1746	1743	1754	1745	166
180°	1754	1754	1754	1754	1754	



TEST NUMBER: P913496

CATALOG NUMBER: DFN2DIP-HX3F0-050D070US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1637.0	1637.0	1637.0	1637.0	1637.0
2.5°	1644.4	1637.0	1620.7	1635.6	1632.6
5°	1637.0	1629.7	1610.3	1623.7	1619.3
7.5°	1623.7	1614.9	1594.1	1600.0	1592.5
10°	1605.9	1595.5	1566.0	1561.5	1552.6
12.5°	1583.7	1570.4	1530.3	1521.5	1505.1
15°	1557.0	1540.7	1490.4	1462.3	1447.5
17.5°	1525.9	1502.2	1439.9	1407.4	1383.6
20°	1490.4	1460.7	1386.6	1349.7	1317.0
22.5°	1451.9	1417.8	1331.8	1281.5	1259.3
25°	1413.3	1365.9	1268.1	1207.4	1185.1
27.5°	1367.5	1317.0	1208.9	1139.2	1105.2
30°	1318.6	1262.2	1143.7	1068.2	1028.1
32.5°	1271.1	1202.9	1081.6	992.6	955.5
35°	1217.8	1142.2	1011.9	918.5	885.9
37.5°	1165.9	1084.4	946.7	844.4	807.5
40°	1111.1	1022.3	878.4	773.3	734.8
42.5°	1054.9	960.0	810.4	700.7	663.8
45°	995.6	896.3	740.8	635.5	599.9
47.5°	939.3	834.2	674.1	568.9	536.3
50°	877.1	771.9	608.9	506.6	475.6
52.5°	816.3	705.1	546.7	448.9	420.8
55°	757.0	641.4	481.4	392.6	364.5
57.5°	696.3	577.8	423.7	340.8	317.0
60°	634.1	515.6	362.9	287.5	263.7
62.5°	573.4	454.9	311.1	240.0	228.2
65°	511.1	391.1	257.8	207.5	203.0
67.5°	451.9	331.8	207.5	182.2	177.8
70°	389.7	274.1	171.8	157.0	151.1
72.5°	330.4	220.7	143.7	131.9	128.9
75°	272.6	168.8	118.5	108.1	106.7
77.5°	214.8	119.9	93.4	87.4	84.4
80°	161.4	86.0	71.1	65.2	65.2
82.5°	112.6	57.8	48.9	45.9	45.9
85°	63.7	32.6	28.1	28.1	28.1
87.5°	23.8	11.8	11.8	10.4	10.4
90°	1.6	19.0	51.8	48.6	50.2
92.5°	32.8	44.4	46.0	47.6	47.6
95°	77.2	92.0	94.7	94.7	92.0
97.5°	128.5	142.2	148.1	148.1	148.1
100°	187.7	199.9	204.1	204.1	202.5
102.5°	250.1	259.0	264.9	266.5	264.9
105°	318.3	322.5	325.7	328.4	328.4
107.5°	386.0	392.3	392.3	393.4	386.0
110°	451.5	460.0	460.0	460.0	455.7



TEST NUMBER: P913496

CATALOG NUMBER: DFN2DIP-HX3F0-050D070US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	522.4	531.4	529.8	525.5	522.4
115°	592.2	600.6	598.0	596.4	592.2
117.5°	661.4	673.0	665.7	661.4	657.2
120°	731.2	742.8	731.2	731.2	726.4
122.5°	794.6	809.5	802.1	797.8	794.6
125°	861.3	874.5	870.3	865.5	864.0
127.5°	926.3	942.7	936.9	930.6	926.3
130°	987.1	1006.1	1003.5	1000.4	994.5
132.5°	1055.3	1070.2	1071.2	1063.8	1059.5
135°	1114.0	1130.4	1133.6	1131.9	1127.7
137.5°	1179.6	1192.8	1195.4	1194.4	1188.0
140°	1237.2	1250.5	1257.8	1257.8	1252.0
142.5°	1296.4	1309.6	1313.8	1315.4	1309.6
145°	1352.5	1363.0	1371.5	1373.1	1367.3
147.5°	1402.7	1415.9	1422.3	1424.9	1419.1
150°	1454.5	1463.5	1469.3	1474.1	1469.3
152.5°	1500.5	1509.5	1516.9	1522.7	1516.9
155°	1546.5	1550.7	1555.5	1562.9	1558.1
157.5°	1586.2	1589.4	1592.0	1602.6	1595.1
160°	1621.6	1624.8	1626.3	1635.3	1629.0
162.5°	1654.4	1654.4	1656.0	1666.0	1658.6
165°	1682.4	1680.8	1680.8	1691.4	1683.9
167.5°	1707.8	1703.0	1703.0	1713.6	1706.2
170°	1726.8	1722.6	1721.0	1731.5	1722.6
172.5°	1740.0	1735.7	1734.2	1744.8	1735.7
175°	1750.6	1746.4	1743.2	1753.7	1744.8
177.5°	1756.4	1752.1	1749.0	1758.0	1749.0
180°	1753.7	1753.7	1753.7	1753.7	1753.7



TEST NUMBER: P913496
 CATALOG NUMBER: DFN2DIP-HX3F0-050D070US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.40	9.16	9.43	10.20	11.60	4.37	5.13	5.41	6.17	7.57
	3H	10.06	10.74	11.11	11.79	13.21	5.55	6.23	6.60	7.28	8.70
	4H	10.66	11.30	11.72	12.36	13.78	5.99	6.64	7.06	7.69	9.12
	6H	11.07	11.66	12.14	12.72	14.16	6.31	6.90	7.38	7.96	9.39
	8H	11.19	11.76	12.27	12.83	14.26	6.39	6.96	7.47	8.03	9.46
	12H	11.25	11.78	12.33	12.85	14.30	6.43	6.97	7.51	8.03	9.49
4H	2H	8.40	9.05	9.47	10.10	11.53	4.95	5.60	6.02	6.65	8.08
	3H	10.22	10.75	11.29	11.83	13.27	6.29	6.83	7.37	7.91	9.35
	4H	10.90	11.39	11.98	12.46	13.92	6.83	7.32	7.91	8.39	9.86
	6H	11.40	11.83	12.49	12.92	14.37	7.24	7.66	8.33	8.76	10.21
	8H	11.57	11.97	12.66	13.05	14.52	7.37	7.76	8.46	8.85	10.32
	12H	11.66	12.02	12.77	13.12	14.59	7.43	7.78	8.53	8.88	10.36
8H	4H	10.86	11.26	11.95	12.34	13.81	7.10	7.50	8.19	8.58	10.05
	6H	11.42	11.74	12.53	12.87	14.34	7.61	7.94	8.72	9.07	10.53
	8H	11.63	11.91	12.75	13.02	14.51	7.80	8.08	8.92	9.19	10.68
	12H	11.76	12.01	12.88	13.11	14.64	7.91	8.16	9.03	9.27	10.79
12H	4H	10.81	11.17	11.92	12.27	13.74	7.10	7.46	8.21	8.56	10.03
	6H	11.39	11.68	12.51	12.79	14.27	7.66	7.94	8.78	9.05	10.54
	8H	11.60	11.85	12.72	12.96	14.48	7.86	8.11	8.98	9.22	10.74