

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913541

Luminaire Tested: DFN2DIP-HX3F0-070D060US927-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913541
REPORT IS A COMBINATION OF REPORTS P900772 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-070D060US927-RLONL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9419.0 lumens
Efficiency: N/A
Efficacy: 82.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 114.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913541
CATALOG NUMBER: DFN2DIP-HX3F0-070D060US927-RLLONL

Luminous Intensity Polar Plot

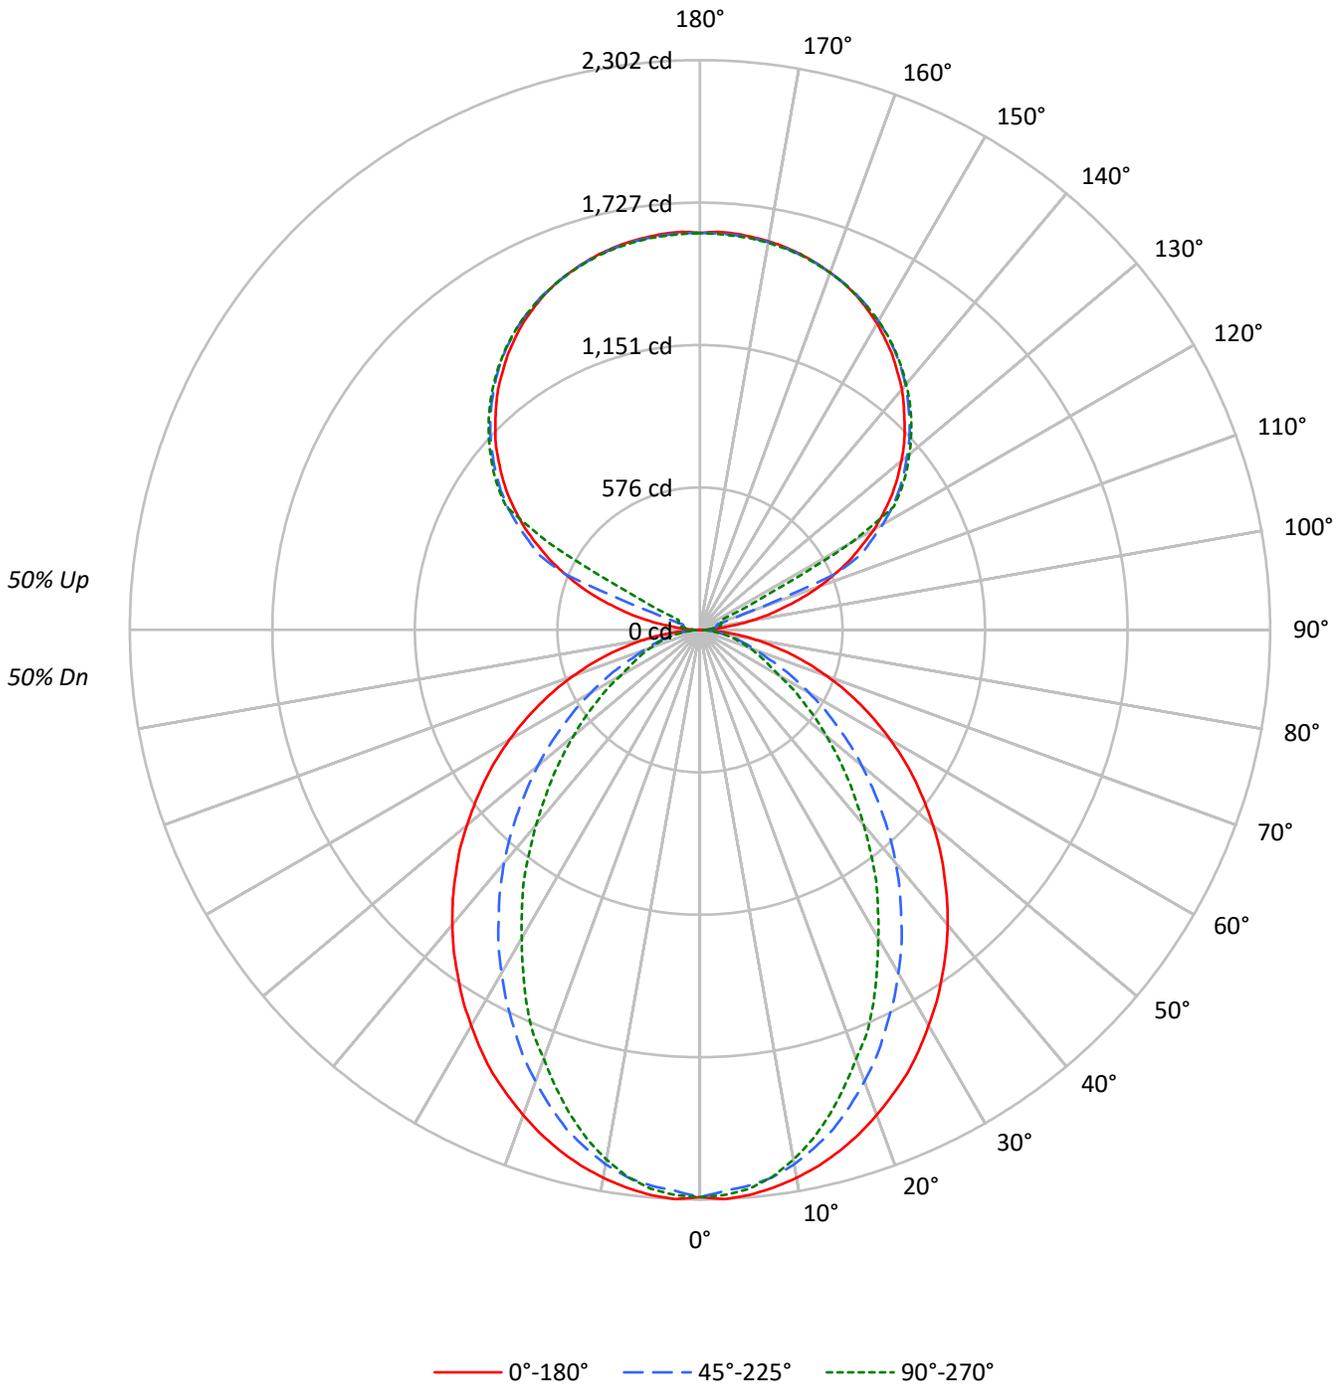



TEST NUMBER: P913541
 CATALOG NUMBER: DFN2DIP-HX3F0-070D060US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	56	56	56	50
1	98	94	90	87	91	87	84	81	74	72	69	62	60	59	50	49	48	48	48	48	43
2	90	83	77	72	83	77	72	67	65	62	58	55	52	50	45	43	41	41	41	41	37
3	82	73	66	60	76	68	62	57	58	53	50	49	45	43	40	38	36	36	36	36	32
4	76	65	57	52	70	60	54	49	52	47	43	44	40	37	36	34	31	31	31	31	28
5	70	58	50	45	64	54	47	42	47	41	37	40	35	32	33	30	28	28	28	28	24
6	64	52	45	39	59	49	42	37	42	37	33	36	32	29	30	27	25	25	25	25	22
7	59	47	40	34	55	44	37	32	38	33	29	33	29	25	28	24	22	22	22	22	19
8	55	43	36	30	51	40	34	29	35	30	26	30	26	23	25	22	20	20	20	20	18
9	52	40	32	27	48	37	30	26	32	27	23	28	24	21	24	20	18	18	18	18	16
10	48	36	29	25	45	34	28	23	30	25	21	26	22	19	22	19	17	17	17	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2655	2655	2655
5°	2658	2611	2628
10°	2630	2558	2541
15°	2593	2471	2407
20°	2544	2353	2244
25°	2493	2221	2086
30°	2426	2086	1887
35°	2360	1940	1712
40°	2293	1790	1511
45°	2216	1623	1329
50°	2135	1456	1152
55°	2051	1276	981
60°	1953	1089	806
65°	1841	899	724
70°	1705	722	653
75°	1533	633	591
80°	1285	525	508
85°	878	342	373

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2216 cd/sqm



TEST NUMBER: P913541

CATALOG NUMBER: DFN2DIP-HX3F0-070D060US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	214.8	2.3
10°-20°	589.7	6.3
20°-30°	827.9	8.8
30°-40°	902.4	9.6
40°-50°	829.4	8.8
50°-60°	651.4	6.9
60°-70°	424.0	4.5
70°-80°	218.2	2.3
80°-90°	58.5	0.6
90°-100°	52.9	0.6
100°-110°	197.2	2.1
110°-120°	523.0	5.6
120°-130°	867.4	9.2
130°-140°	921.3	9.8
140°-150°	856.3	9.1
150°-160°	688.4	7.3
160°-170°	443.6	4.7
170°-180°	152.7	1.6
0°-30°	1632.3	17.3
0°-40°	2534.7	26.9
0°-60°	4015.5	42.6
0°-90°	4716.3	50.1
90°-120°	773.0	8.2
90°-150°	3418.0	36.3
90°-180°	4703.0	49.9
0°-180°	9419.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2292	2292	2292	2292	2292	
5°	2292	2282	2254	2273	2267	217
15°	2180	2157	2086	2047	2026	614
25°	1979	1912	1775	1690	1659	910
35°	1705	1599	1417	1286	1240	1067
45°	1394	1255	1037	890	840	1076
55°	1060	898	674	550	510	947
65°	716	548	361	290	284	709
75°	382	236	166	151	149	404
85°	89	46	39	39	39	102
90°	1	14	23	29	31	9
95°	75	37	45	51	50	89
105°	353	388	71	84	88	377
115°	667	687	716	179	95	657
125°	944	959	981	989	992	842
135°	1168	1186	1197	1208	1206	902
145°	1355	1353	1373	1381	1376	847
155°	1492	1481	1495	1502	1493	687
165°	1572	1565	1568	1576	1568	444
175°	1608	1599	1602	1610	1598	153
180°	1604	1604	1604	1604	1604	



TEST NUMBER: P913541

CATALOG NUMBER: DFN2DIP-HX3F0-070D060US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2291.9	2291.9	2291.9	2291.9	2291.9
2.5°	2302.2	2291.9	2269.0	2289.9	2285.7
5°	2291.9	2281.5	2254.5	2273.2	2267.0
7.5°	2273.2	2260.8	2231.8	2239.9	2229.6
10°	2248.3	2233.8	2192.4	2186.0	2173.7
12.5°	2217.2	2198.5	2142.5	2130.1	2107.2
15°	2179.8	2157.0	2086.5	2047.2	2026.5
17.5°	2136.3	2103.1	2015.9	1970.3	1937.1
20°	2086.5	2044.9	1941.3	1889.6	1843.8
22.5°	2032.7	1984.9	1864.5	1794.1	1763.1
25°	1978.7	1912.2	1775.4	1690.4	1659.2
27.5°	1914.5	1843.8	1692.4	1595.0	1547.2
30°	1846.0	1767.0	1601.1	1495.5	1439.4
32.5°	1779.6	1684.1	1514.2	1389.6	1337.7
35°	1704.9	1599.1	1416.7	1286.0	1240.2
37.5°	1632.4	1518.1	1325.4	1182.1	1130.4
40°	1555.5	1431.2	1229.9	1082.7	1028.7
42.5°	1476.8	1344.1	1134.6	981.0	929.3
45°	1393.8	1254.7	1037.1	889.7	839.9
47.5°	1315.0	1167.8	943.8	796.4	750.8
50°	1227.9	1080.7	852.5	709.2	665.9
52.5°	1142.7	987.1	765.3	628.4	589.1
55°	1059.8	898.0	674.0	549.7	510.3
57.5°	974.9	808.9	593.3	477.1	443.9
60°	887.7	721.8	508.1	402.5	369.2
62.5°	802.7	636.8	435.5	336.0	319.5
65°	715.6	547.5	360.9	290.5	284.1
67.5°	632.6	464.5	290.5	255.0	248.9
70°	545.5	383.7	240.5	219.8	211.4
72.5°	462.6	309.0	201.1	184.7	180.5
75°	381.6	236.3	165.9	151.4	149.4
77.5°	300.8	167.9	130.7	122.3	118.2
80°	226.0	120.3	99.5	91.3	91.3
82.5°	157.6	81.0	68.4	64.2	64.2
85°	89.1	45.6	39.4	39.4	39.4
87.5°	33.2	16.5	16.5	14.5	14.5
90°	1.1	13.9	23.1	29.1	31.3
92.5°	29.1	24.4	27.8	30.2	31.3
95°	75.4	37.1	45.2	51.2	49.9
97.5°	135.8	40.6	59.1	62.7	63.8
100°	205.5	46.4	66.1	75.4	77.7
102.5°	282.0	279.8	68.5	81.2	84.8
105°	352.8	387.7	70.8	83.5	88.2
107.5°	435.3	464.2	73.2	85.9	90.5
110°	514.3	538.5	203.2	87.1	91.7



TEST NUMBER: P913541

CATALOG NUMBER: DFN2DIP-HX3F0-070D060US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	588.5	609.3	589.6	89.3	92.9
115°	667.4	687.1	716.2	178.8	95.2
117.5°	735.9	759.1	778.9	612.8	308.7
120°	812.5	829.9	850.9	864.7	708.1
122.5°	877.4	896.0	919.3	926.2	927.5
125°	943.6	958.8	980.8	989.0	992.4
127.5°	1004.0	1020.3	1037.8	1049.3	1050.4
130°	1060.9	1079.5	1092.2	1105.0	1103.9
132.5°	1119.0	1134.1	1146.8	1157.2	1156.1
135°	1167.8	1186.4	1196.7	1208.4	1206.0
137.5°	1218.7	1232.6	1244.4	1255.9	1252.5
140°	1268.6	1278.0	1290.7	1301.2	1295.4
142.5°	1310.5	1318.7	1333.7	1342.9	1337.1
145°	1354.6	1353.4	1373.1	1381.2	1375.5
147.5°	1392.8	1389.3	1409.1	1414.8	1410.3
150°	1430.0	1421.9	1440.5	1447.4	1441.6
152.5°	1461.3	1452.1	1469.4	1476.5	1468.3
155°	1491.5	1481.1	1495.1	1502.0	1492.7
157.5°	1515.9	1506.6	1517.1	1525.3	1515.9
160°	1536.8	1529.8	1536.8	1543.7	1535.6
162.5°	1555.3	1548.4	1554.2	1562.3	1551.9
165°	1571.6	1564.7	1568.1	1576.3	1568.1
167.5°	1584.4	1577.4	1581.0	1589.1	1578.6
170°	1594.9	1587.8	1590.2	1598.3	1587.8
172.5°	1601.8	1594.9	1597.2	1605.4	1594.9
175°	1607.6	1599.4	1601.8	1609.9	1598.3
177.5°	1609.9	1601.8	1603.0	1611.1	1600.7
180°	1604.1	1604.1	1604.1	1604.1	1604.1



TEST NUMBER: P913541
 CATALOG NUMBER: DFN2DIP-HX3F0-070D060US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.50	11.33	11.47	12.31	13.58	6.48	7.31	7.44	8.28	9.56
	3H	12.17	12.92	13.15	13.90	15.19	7.66	8.41	8.64	9.39	10.68
	4H	12.78	13.48	13.76	14.46	15.77	8.11	8.81	9.10	9.80	11.10
	6H	13.19	13.84	14.19	14.83	16.14	8.43	9.07	9.43	10.07	11.38
	8H	13.31	13.93	14.32	14.94	16.25	8.52	9.13	9.52	10.14	11.45
	12H	13.37	13.96	14.38	14.96	16.30	8.56	9.14	9.57	10.14	11.48
4H	2H	10.52	11.22	11.51	12.21	13.51	7.07	7.77	8.06	8.76	10.06
	3H	12.34	12.92	13.34	13.94	15.26	8.42	9.00	9.42	10.01	11.33
	4H	13.03	13.56	14.04	14.57	15.91	8.96	9.49	9.97	10.50	11.84
	6H	13.53	13.99	14.56	15.02	16.36	9.37	9.83	10.40	10.86	12.20
	8H	13.71	14.13	14.73	15.16	16.51	9.50	9.93	10.52	10.95	12.30
	12H	13.80	14.18	14.84	15.22	16.58	9.56	9.95	10.60	10.99	12.35
8H	4H	12.99	13.42	14.02	14.45	15.80	9.23	9.66	10.26	10.69	12.04
	6H	13.55	13.90	14.60	14.97	16.32	9.75	10.10	10.79	11.17	12.52
	8H	13.76	14.07	14.82	15.12	16.49	9.93	10.24	10.99	11.30	12.67
	12H	13.90	14.17	14.95	15.22	16.63	10.05	10.32	11.11	11.37	12.78
12H	4H	12.94	13.33	13.99	14.37	15.73	9.24	9.62	10.28	10.66	12.02
	6H	13.53	13.84	14.58	14.89	16.26	9.79	10.10	10.85	11.16	12.53
	8H	13.74	14.01	14.80	15.06	16.47	10.00	10.27	11.06	11.32	12.73