

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913584

Luminaire Tested: DFN2DIP-HX3F0-090D050US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913584
REPORT IS A COMBINATION OF REPORTS P899242 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-090D050US927-RLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9565.6 lumens
Efficiency: N/A
Efficacy: 74.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 129.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913584

CATALOG NUMBER: DFN2DIP-HX3F0-090D050US927-RLLFLL

Luminous Intensity Polar Plot

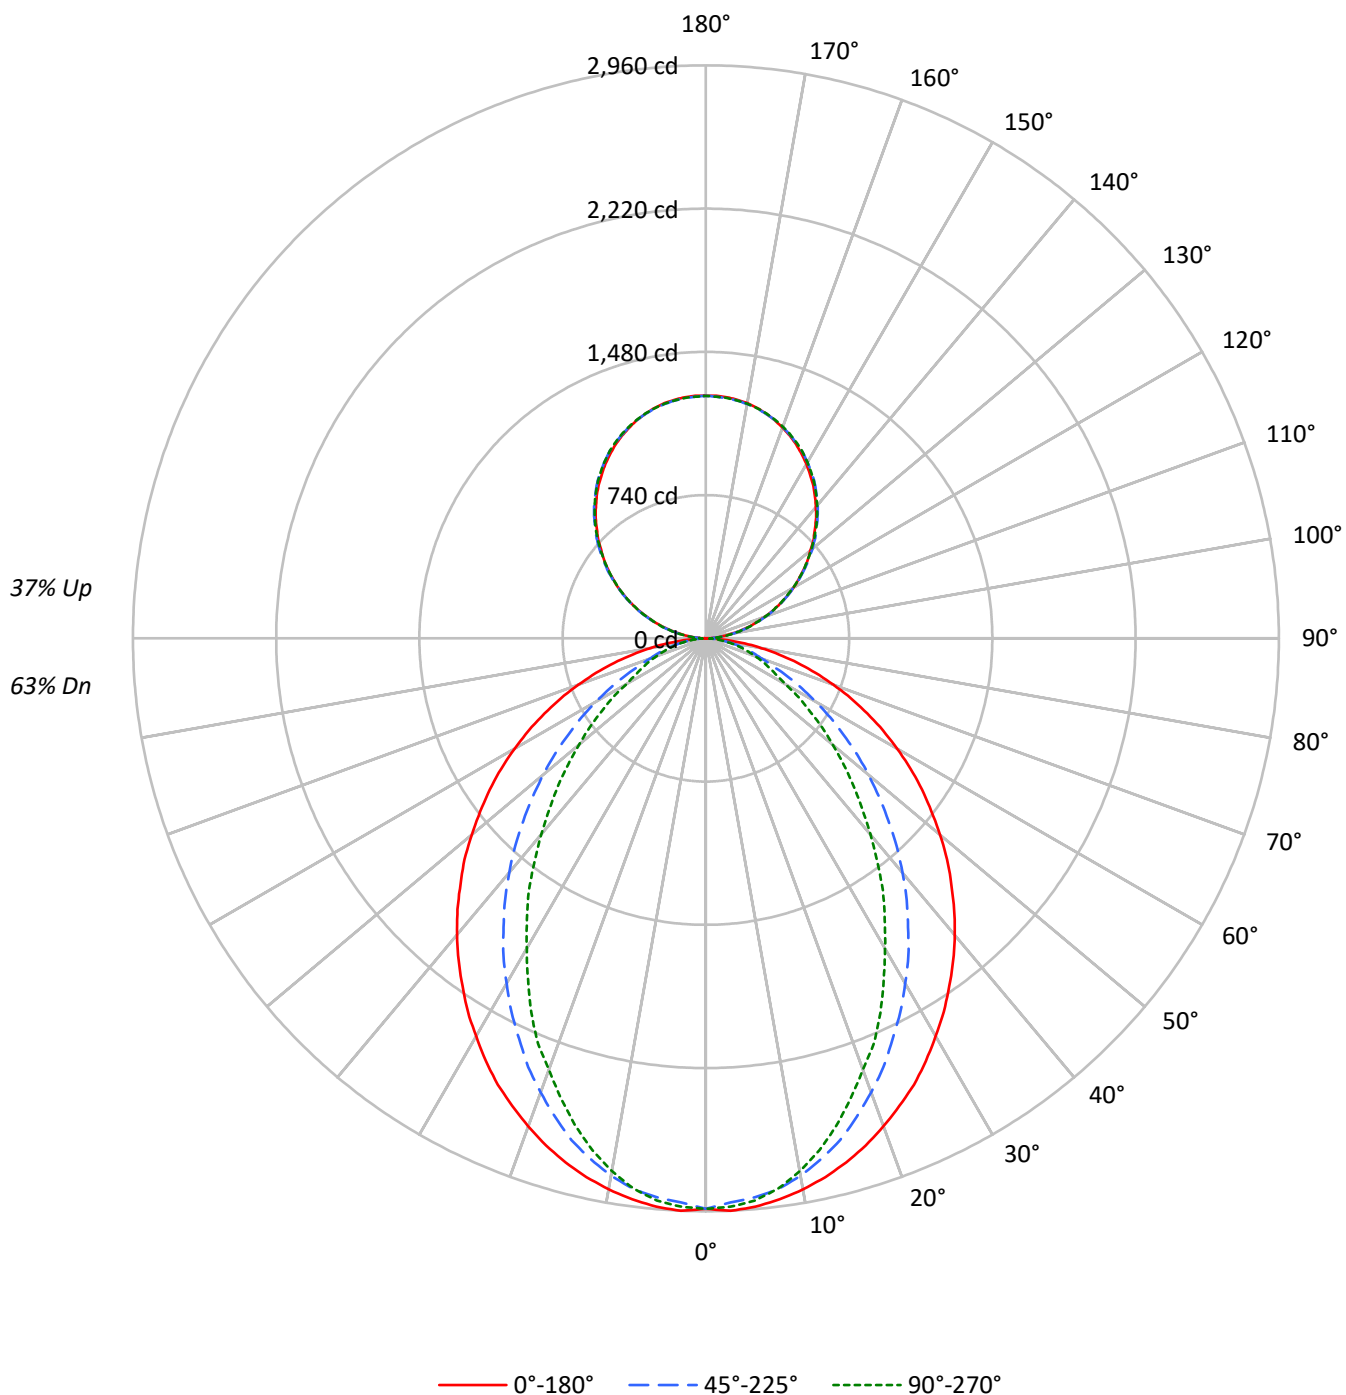

TEST NUMBER: P913584

CATALOG NUMBER: DFN2DIP-HX3F0-090D050US927-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	104	104	104	104	91	91	91	79	79	79	68	68	68
1	101	97	93	90	95	91	88	85	81	78	76	71	69	67	61	60	59
2	93	86	80	75	87	81	75	71	71	67	64	63	60	57	55	53	51
3	85	76	69	63	80	72	65	60	64	59	54	56	52	49	49	46	44
4	78	68	60	54	73	64	57	52	57	51	47	50	46	43	44	41	38
5	72	61	53	47	68	57	50	45	51	45	41	46	41	37	40	37	34
6	67	55	47	41	62	52	45	39	47	41	36	41	37	33	37	33	30
7	62	50	42	36	58	47	40	35	42	37	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	24
9	54	42	34	29	51	40	33	28	36	30	26	32	28	24	29	25	22
10	50	38	31	26	47	37	30	25	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3413	3413	3413
5°	3417	3357	3379
10°	3382	3289	3267
15°	3334	3178	3095
20°	3271	3025	2885
25°	3206	2856	2682
30°	3120	2681	2426
35°	3035	2495	2201
40°	2949	2301	1943
45°	2849	2087	1709
50°	2745	1872	1481
55°	2637	1641	1261
60°	2511	1401	1037
65°	2367	1156	931
70°	2192	929	840
75°	1971	813	760
80°	1652	675	653
85°	1128	439	479

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2849 cd/sqm

TEST NUMBER: P913584

CATALOG NUMBER: DFN2DIP-HX3F0-090D050US927-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.2	2.9
10°-20°	758.1	7.9
20°-30°	1064.4	11.1
30°-40°	1160.3	12.1
40°-50°	1066.4	11.1
50°-60°	837.5	8.8
60°-70°	545.1	5.7
70°-80°	280.6	2.9
80°-90°	75.2	0.8
90°-100°	77.5	0.8
100°-110°	246.3	2.6
110°-120°	421.5	4.4
120°-130°	554.3	5.8
130°-140°	622.2	6.5
140°-150°	610.1	6.4
150°-160°	511.8	5.4
160°-170°	339.4	3.5
170°-180°	118.6	1.2
0°-30°	2098.7	21.9
0°-40°	3258.9	34.1
0°-60°	5162.8	54.0
0°-90°	6063.8	63.4
90°-120°	745.3	7.8
90°-150°	2532.0	26.5
90°-180°	3502.0	36.6
0°-180°	9565.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2947	2947	2947	2947	2947	
5°	2947	2933	2899	2923	2915	279
15°	2803	2773	2683	2632	2606	790
25°	2544	2459	2283	2173	2133	1170
35°	2192	2056	1822	1653	1595	1372
45°	1792	1613	1333	1144	1080	1384
55°	1363	1155	867	707	656	1218
65°	920	704	464	373	365	912
75°	491	304	213	195	192	519
85°	114	58	51	51	51	132
90°	1	14	37	35	36	9
95°	55	66	68	68	66	61
105°	227	230	233	234	234	240
115°	423	429	427	426	423	418
125°	615	625	622	618	617	550
135°	796	807	810	809	806	615
145°	966	974	980	981	977	604
155°	1105	1108	1111	1116	1113	508
165°	1202	1201	1201	1208	1203	339
175°	1250	1247	1245	1253	1246	119
180°	1253	1253	1253	1253	1253	

TEST NUMBER: P913584

CATALOG NUMBER: DFN2DIP-HX3F0-090D050US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2946.7	2946.7	2946.7	2946.7	2946.7
2.5°	2960.0	2946.7	2917.2	2944.1	2938.8
5°	2946.7	2933.4	2898.6	2922.6	2914.7
7.5°	2922.6	2906.8	2869.4	2879.9	2866.6
10°	2890.7	2872.0	2818.8	2810.6	2794.7
12.5°	2850.7	2826.7	2754.6	2738.7	2709.3
15°	2802.7	2773.3	2682.7	2632.0	2605.5
17.5°	2746.7	2704.0	2591.9	2533.3	2490.6
20°	2682.7	2629.2	2495.9	2429.5	2370.6
22.5°	2613.4	2552.0	2397.2	2306.7	2266.8
25°	2544.1	2458.6	2282.7	2173.4	2133.3
27.5°	2461.5	2370.6	2176.0	2050.6	1989.2
30°	2373.5	2271.9	2058.6	1922.8	1850.6
32.5°	2288.0	2165.2	1946.8	1786.7	1719.9
35°	2192.1	2056.0	1821.5	1653.4	1594.6
37.5°	2098.7	1951.9	1704.1	1519.9	1453.4
40°	2000.0	1840.2	1581.3	1392.0	1322.7
42.5°	1898.7	1728.1	1458.7	1261.3	1194.8
45°	1792.1	1613.3	1333.4	1143.8	1079.9
47.5°	1690.8	1501.5	1213.5	1023.9	965.4
50°	1578.7	1389.4	1096.1	911.9	856.1
52.5°	1469.3	1269.2	984.0	808.0	757.4
55°	1362.6	1154.6	866.6	706.8	656.1
57.5°	1253.4	1040.1	762.8	613.4	570.7
60°	1141.3	928.0	653.3	517.5	474.8
62.5°	1032.1	818.8	559.9	432.1	410.8
65°	920.0	703.9	464.0	373.4	365.3
67.5°	813.4	597.2	373.4	327.9	320.0
70°	701.4	493.4	309.3	282.7	271.9
72.5°	594.7	397.2	258.6	237.3	232.0
75°	490.6	303.9	213.3	194.6	192.1
77.5°	386.7	215.9	168.0	157.3	151.9
80°	290.6	154.8	127.9	117.4	117.4
82.5°	202.6	104.1	88.0	82.6	82.6
85°	114.5	58.5	50.6	50.6	50.6
87.5°	42.7	21.2	21.2	18.7	18.7
90°	1.1	13.6	37.0	34.8	35.9
92.5°	23.4	31.7	32.9	34.0	34.0
95°	55.1	65.8	67.6	67.6	65.8
97.5°	91.7	101.6	105.8	105.8	105.8
100°	134.0	142.8	145.8	145.8	144.7
102.5°	178.6	185.1	189.2	190.4	189.2
105°	227.4	230.4	232.7	234.5	234.5
107.5°	275.7	280.2	280.2	281.0	275.7
110°	322.5	328.6	328.6	328.6	325.5

TEST NUMBER: P913584

CATALOG NUMBER: DFN2DIP-HX3F0-090D050US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	373.1	379.5	378.4	375.4	373.1
115°	422.9	429.0	427.1	426.0	422.9
117.5°	472.5	480.8	475.5	472.5	469.4
120°	522.3	530.6	522.3	522.3	518.9
122.5°	567.6	578.2	572.9	569.9	567.6
125°	615.2	624.6	621.6	618.2	617.1
127.5°	661.6	673.4	669.2	664.6	661.6
130°	705.1	718.7	716.8	714.5	710.3
132.5°	753.8	764.4	765.2	759.9	756.8
135°	795.7	807.4	809.7	808.6	805.6
137.5°	842.6	852.0	853.9	853.1	848.6
140°	883.7	893.2	898.4	898.4	894.3
142.5°	926.0	935.5	938.5	939.6	935.5
145°	966.1	973.6	979.6	980.8	976.6
147.5°	1002.0	1011.4	1015.9	1017.8	1013.6
150°	1038.9	1045.4	1049.5	1052.9	1049.5
152.5°	1071.8	1078.2	1083.5	1087.7	1083.5
155°	1104.6	1107.6	1111.0	1116.3	1112.9
157.5°	1133.0	1135.2	1137.1	1144.7	1139.4
160°	1158.2	1160.5	1161.7	1168.1	1163.6
162.5°	1181.7	1181.7	1182.8	1190.0	1184.7
165°	1201.7	1200.6	1200.6	1208.2	1202.8
167.5°	1219.8	1216.4	1216.4	1224.0	1218.7
170°	1233.4	1230.4	1229.3	1236.8	1230.4
172.5°	1242.9	1239.8	1238.7	1246.3	1239.8
175°	1250.5	1247.4	1245.2	1252.7	1246.3
177.5°	1254.6	1251.6	1249.3	1255.7	1249.3
180°	1252.7	1252.7	1252.7	1252.7	1252.7

TEST NUMBER: P913584

CATALOG NUMBER: DFN2DIP-HX3F0-090D050US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.53	13.49	13.38	14.35	15.41	8.51	9.46	9.35	10.32	11.39
	3H	14.21	15.07	15.07	15.93	17.03	9.70	10.56	10.56	11.42	12.52
	4H	14.82	15.63	15.69	16.50	17.61	10.16	10.96	11.03	11.83	12.94
	6H	15.24	15.98	16.13	16.87	17.99	10.48	11.22	11.36	12.10	13.22
	8H	15.37	16.07	16.26	16.97	18.09	10.57	11.28	11.46	12.18	13.29
	12H	15.43	16.10	16.33	17.00	18.14	10.62	11.29	11.51	12.18	13.32
4H	2H	12.57	13.37	13.44	14.24	15.35	9.12	9.92	9.99	10.79	11.90
	3H	14.40	15.07	15.28	15.97	17.09	10.47	11.14	11.36	12.05	13.17
	4H	15.09	15.70	15.99	16.60	17.75	11.02	11.63	11.92	12.53	13.68
	6H	15.60	16.13	16.52	17.05	18.20	11.44	11.97	12.35	12.89	14.04
	8H	15.78	16.27	16.69	17.19	18.35	11.57	12.06	12.49	12.98	14.14
	12H	15.87	16.31	16.81	17.25	18.42	11.64	12.08	12.57	13.02	14.19
8H	4H	15.06	15.55	15.98	16.47	17.64	11.31	11.79	12.22	12.72	13.88
	6H	15.63	16.03	16.57	16.99	18.16	11.82	12.23	12.76	13.19	14.35
	8H	15.84	16.20	16.79	17.15	18.33	12.01	12.37	12.96	13.32	14.50
	12H	15.98	16.29	16.93	17.24	18.47	12.13	12.45	13.08	13.39	14.62
12H	4H	15.02	15.46	15.95	16.40	17.57	11.32	11.76	12.25	12.69	13.86
	6H	15.60	15.96	16.55	16.91	18.09	11.87	12.23	12.82	13.18	14.36
	8H	15.82	16.14	16.78	17.08	18.31	12.08	12.40	13.03	13.34	14.57