

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916161

Luminaire Tested: DFN2DIP-HX3F0-030D030US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916161
REPORT IS A COMBINATION OF REPORTS P900722 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-030D030US930-RLLONL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4500.5 lumens
Efficiency: N/A
Efficacy: 96.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 46.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916161

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US930-RLLONL

Luminous Intensity Polar Plot

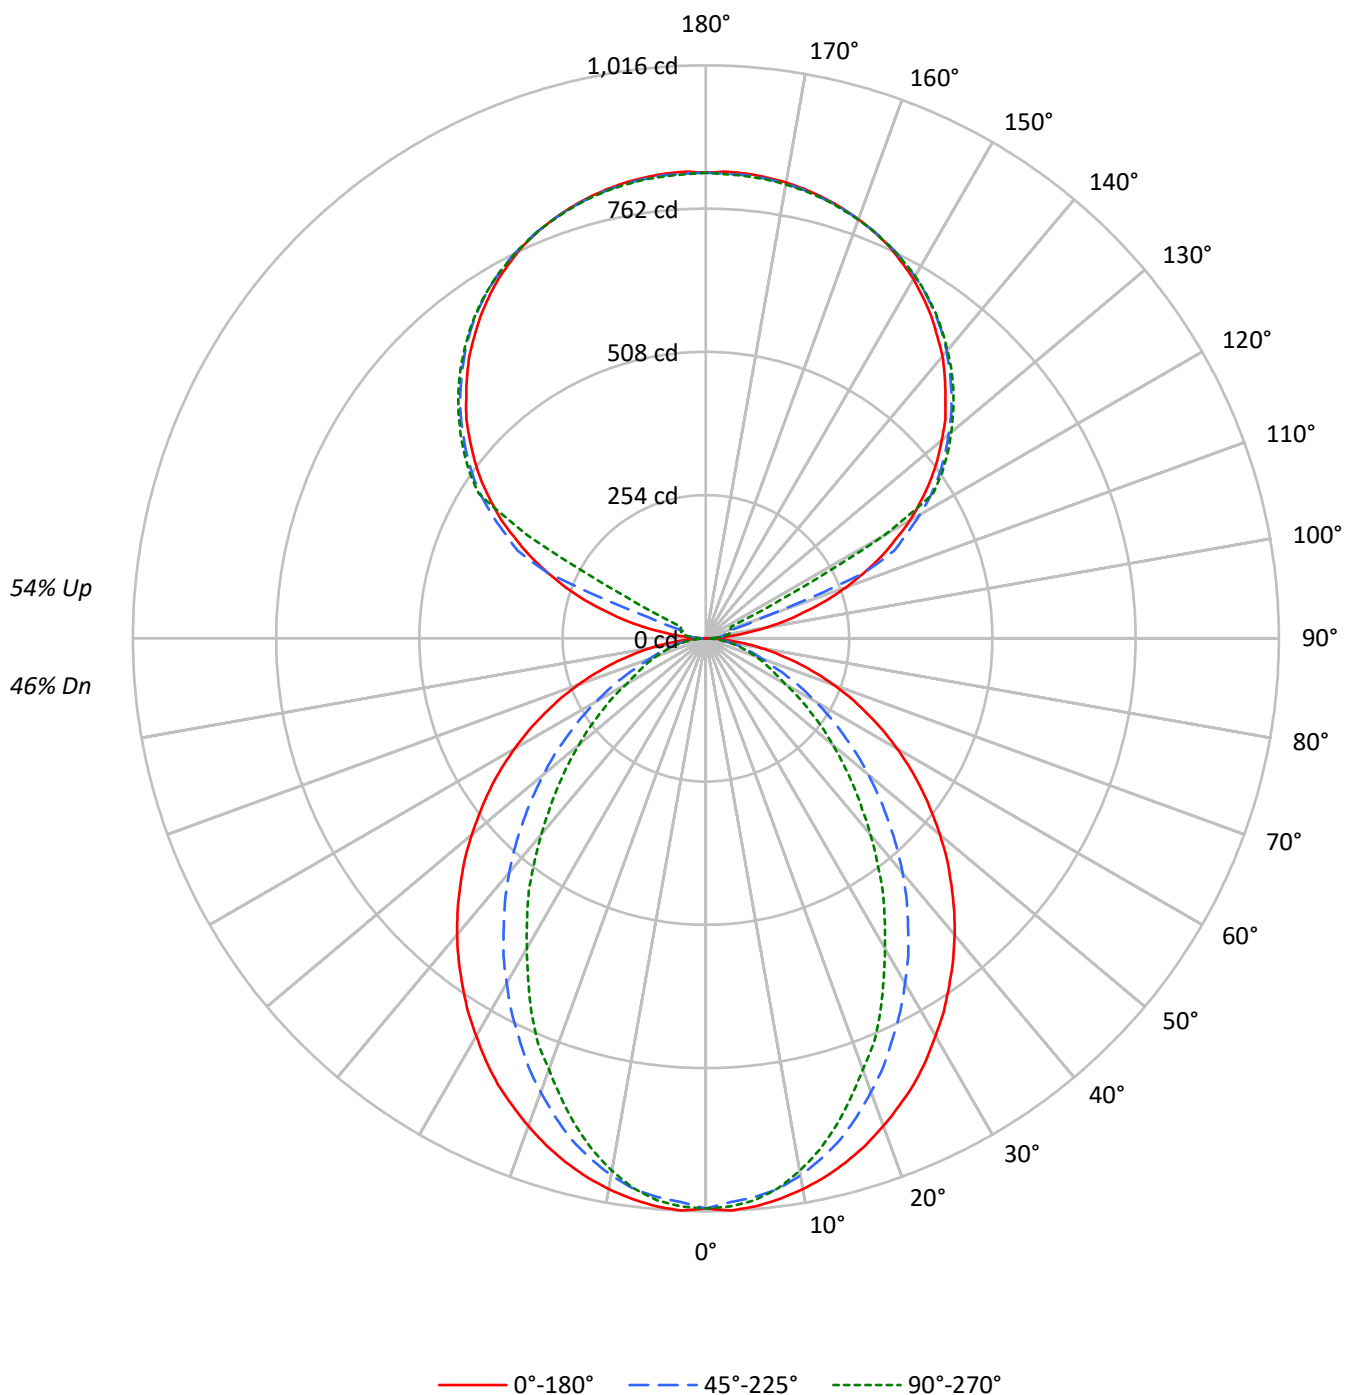

TEST NUMBER: P916161

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1171	1171	1171
5°	1172	1152	1159
10°	1160	1128	1121
15°	1144	1090	1062
20°	1122	1038	990
25°	1100	980	920
30°	1070	920	832
35°	1041	856	755
40°	1012	790	666
45°	977	716	586
50°	942	642	508
55°	904	563	433
60°	861	480	356
65°	812	397	319
70°	752	319	288
75°	676	279	261
80°	567	232	224
85°	387	151	165

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 977 cd/sqm

TEST NUMBER: P916161

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.7	2.1
10°-20°	260.1	5.8
20°-30°	365.1	8.1
30°-40°	398.0	8.8
40°-50°	365.8	8.1
50°-60°	287.3	6.4
60°-70°	187.0	4.2
70°-80°	96.3	2.1
80°-90°	26.0	0.6
90°-100°	27.2	0.6
100°-110°	101.5	2.3
110°-120°	269.1	6.0
120°-130°	446.3	9.9
130°-140°	474.1	10.5
140°-150°	440.6	9.8
150°-160°	354.3	7.9
160°-170°	228.3	5.1
170°-180°	78.6	1.7
0°-30°	720.0	16.0
0°-40°	1118.0	24.8
0°-60°	1771.2	39.4
0°-90°	2080.5	46.2
90°-120°	397.8	8.8
90°-150°	1758.9	39.1
90°-180°	2420.0	53.8
0°-180°	4500.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1011	1011	1011	1011	1011	
5°	1011	1006	994	1003	1000	96
15°	962	951	920	903	894	271
25°	873	843	783	746	732	401
35°	752	705	625	567	547	471
45°	615	553	458	392	370	475
55°	467	396	297	242	225	418
65°	316	242	159	128	125	313
75°	168	104	73	67	66	178
85°	39	20	17	17	17	45
90°	1	7	12	15	16	4
95°	39	19	23	26	26	46
105°	182	200	36	43	45	194
115°	343	354	368	92	49	338
125°	486	493	505	509	511	433
135°	601	610	616	622	621	464
145°	697	696	707	711	708	436
155°	768	762	769	773	768	354
165°	809	805	807	811	807	228
175°	827	823	824	828	822	79
180°	826	826	826	826	826	

TEST NUMBER: P916161

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1010.9	1010.9	1010.9	1010.9	1010.9
2.5°	1015.5	1010.9	1000.8	1010.0	1008.2
5°	1010.9	1006.3	994.4	1002.7	999.9
7.5°	1002.7	997.2	984.4	988.0	983.4
10°	991.6	985.3	967.0	964.2	958.8
12.5°	978.0	969.7	945.0	939.5	929.4
15°	961.5	951.4	920.3	902.9	893.8
17.5°	942.2	927.6	889.2	869.1	854.4
20°	920.3	902.0	856.2	833.5	813.3
22.5°	896.6	875.5	822.4	791.3	777.6
25°	872.8	843.4	783.1	745.6	731.8
27.5°	844.4	813.3	746.5	703.5	682.4
30°	814.2	779.4	706.2	659.7	634.9
32.5°	784.9	742.8	667.9	612.9	590.0
35°	752.0	705.3	624.8	567.2	547.1
37.5°	720.0	669.6	584.6	521.4	498.6
40°	686.2	631.3	542.5	477.5	453.8
42.5°	651.3	592.9	500.4	432.7	409.9
45°	614.8	553.4	457.5	392.4	370.5
47.5°	580.0	515.1	416.3	351.2	331.2
50°	541.6	476.6	376.0	312.8	293.7
52.5°	504.0	435.5	337.6	277.2	259.8
55°	467.4	396.1	297.3	242.5	225.1
57.5°	430.0	356.8	261.7	210.4	195.8
60°	391.5	318.4	224.1	177.5	162.9
62.5°	354.1	280.9	192.1	148.2	141.0
65°	315.6	241.5	159.1	128.1	125.3
67.5°	279.1	204.9	128.1	112.5	109.7
70°	240.6	169.3	106.1	96.9	93.3
72.5°	204.0	136.2	88.7	81.4	79.6
75°	168.3	104.3	73.2	66.8	65.9
77.5°	132.6	74.0	57.6	54.0	52.1
80°	99.7	53.1	43.9	40.3	40.3
82.5°	69.5	35.7	30.2	28.4	28.4
85°	39.3	20.1	17.4	17.4	17.4
87.5°	14.7	7.3	7.3	6.4	6.4
90°	0.6	7.2	11.9	15.0	16.1
92.5°	15.0	12.6	14.3	15.6	16.1
95°	38.8	19.1	23.2	26.3	25.7
97.5°	69.9	21.0	30.4	32.3	32.9
100°	105.7	23.9	34.1	38.8	40.0
102.5°	145.1	144.0	35.2	41.7	43.6
105°	181.6	199.5	36.4	43.0	45.4
107.5°	224.0	238.9	37.7	44.2	46.6
110°	264.6	277.1	104.5	44.8	47.2

TEST NUMBER: P916161

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	302.9	313.6	303.5	46.0	47.8
115°	343.4	353.6	368.5	92.0	49.0
117.5°	378.7	390.6	400.8	315.4	158.9
120°	418.1	427.1	437.8	445.0	364.4
122.5°	451.5	461.1	473.1	476.6	477.3
125°	485.6	493.3	504.8	508.9	510.7
127.5°	516.7	525.0	534.0	540.0	540.5
130°	545.9	555.5	562.1	568.6	568.1
132.5°	575.8	583.6	590.1	595.5	594.9
135°	600.9	610.5	615.8	621.8	620.6
137.5°	627.1	634.3	640.3	646.3	644.5
140°	652.8	657.6	664.1	669.5	666.6
142.5°	674.4	678.6	686.3	691.0	688.1
145°	697.1	696.4	706.6	710.8	707.8
147.5°	716.7	714.9	725.1	728.1	725.7
150°	735.9	731.7	741.3	744.8	741.8
152.5°	751.9	747.2	756.2	759.8	755.6
155°	767.5	762.2	769.3	772.9	768.2
157.5°	780.1	775.3	780.7	784.9	780.1
160°	790.8	787.3	790.8	794.4	790.2
162.5°	800.4	796.8	799.8	804.0	798.6
165°	808.7	805.2	807.0	811.1	807.0
167.5°	815.3	811.7	813.5	817.7	812.4
170°	820.7	817.1	818.3	822.5	817.1
172.5°	824.3	820.7	821.9	826.1	820.7
175°	827.2	823.0	824.3	828.4	822.5
177.5°	828.4	824.3	824.9	829.1	823.7
180°	825.5	825.5	825.5	825.5	825.5

TEST NUMBER: P916161

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.29	8.09	8.28	9.09	10.42	3.26	4.06	4.26	5.07	6.39
	3H	8.96	9.67	9.96	10.68	12.03	4.45	5.16	5.45	6.17	7.52
	4H	9.56	10.24	10.58	11.25	12.61	4.89	5.57	5.91	6.58	7.94
	6H	9.97	10.59	11.00	11.61	12.98	5.21	5.83	6.24	6.85	8.22
	8H	10.09	10.69	11.13	11.72	13.09	5.30	5.89	6.33	6.92	8.29
	12H	10.15	10.71	11.19	11.74	13.13	5.34	5.90	6.38	6.93	8.32
4H	2H	7.30	7.98	8.33	8.99	10.35	3.85	4.53	4.88	5.54	6.90
	3H	9.12	9.68	10.15	10.73	12.09	5.19	5.76	6.23	6.80	8.17
	4H	9.81	10.32	10.85	11.35	12.75	5.74	6.25	6.78	7.29	8.68
	6H	10.31	10.75	11.36	11.81	13.20	6.15	6.59	7.20	7.65	9.04
	8H	10.48	10.89	11.53	11.94	13.35	6.28	6.69	7.33	7.74	9.14
	12H	10.57	10.94	11.64	12.01	13.42	6.34	6.71	7.41	7.78	9.18
8H	4H	9.77	10.18	10.82	11.23	12.64	6.01	6.42	7.06	7.47	8.88
	6H	10.33	10.67	11.40	11.76	13.16	6.52	6.86	7.60	7.95	9.35
	8H	10.54	10.84	11.62	11.91	13.33	6.71	7.01	7.79	8.09	9.50
	12H	10.67	10.93	11.75	12.00	13.46	6.82	7.09	7.91	8.16	9.62
12H	4H	9.72	10.09	10.79	11.16	12.56	6.01	6.38	7.08	7.45	8.86
	6H	10.30	10.60	11.38	11.68	13.10	6.57	6.87	7.65	7.94	9.36
	8H	10.51	10.78	11.60	11.85	13.31	6.77	7.04	7.86	8.11	9.57