

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916212

Luminaire Tested: DFN2DIP-HX3F0-050D040US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916212
REPORT IS A COMBINATION OF REPORTS P899220 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-050D040US930-RLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6351.1 lumens
Efficiency: N/A
Efficacy: 85.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 74.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916212

CATALOG NUMBER: DFN2DIP-HX3F0-050D040US930-RLLFLL

Luminous Intensity Polar Plot

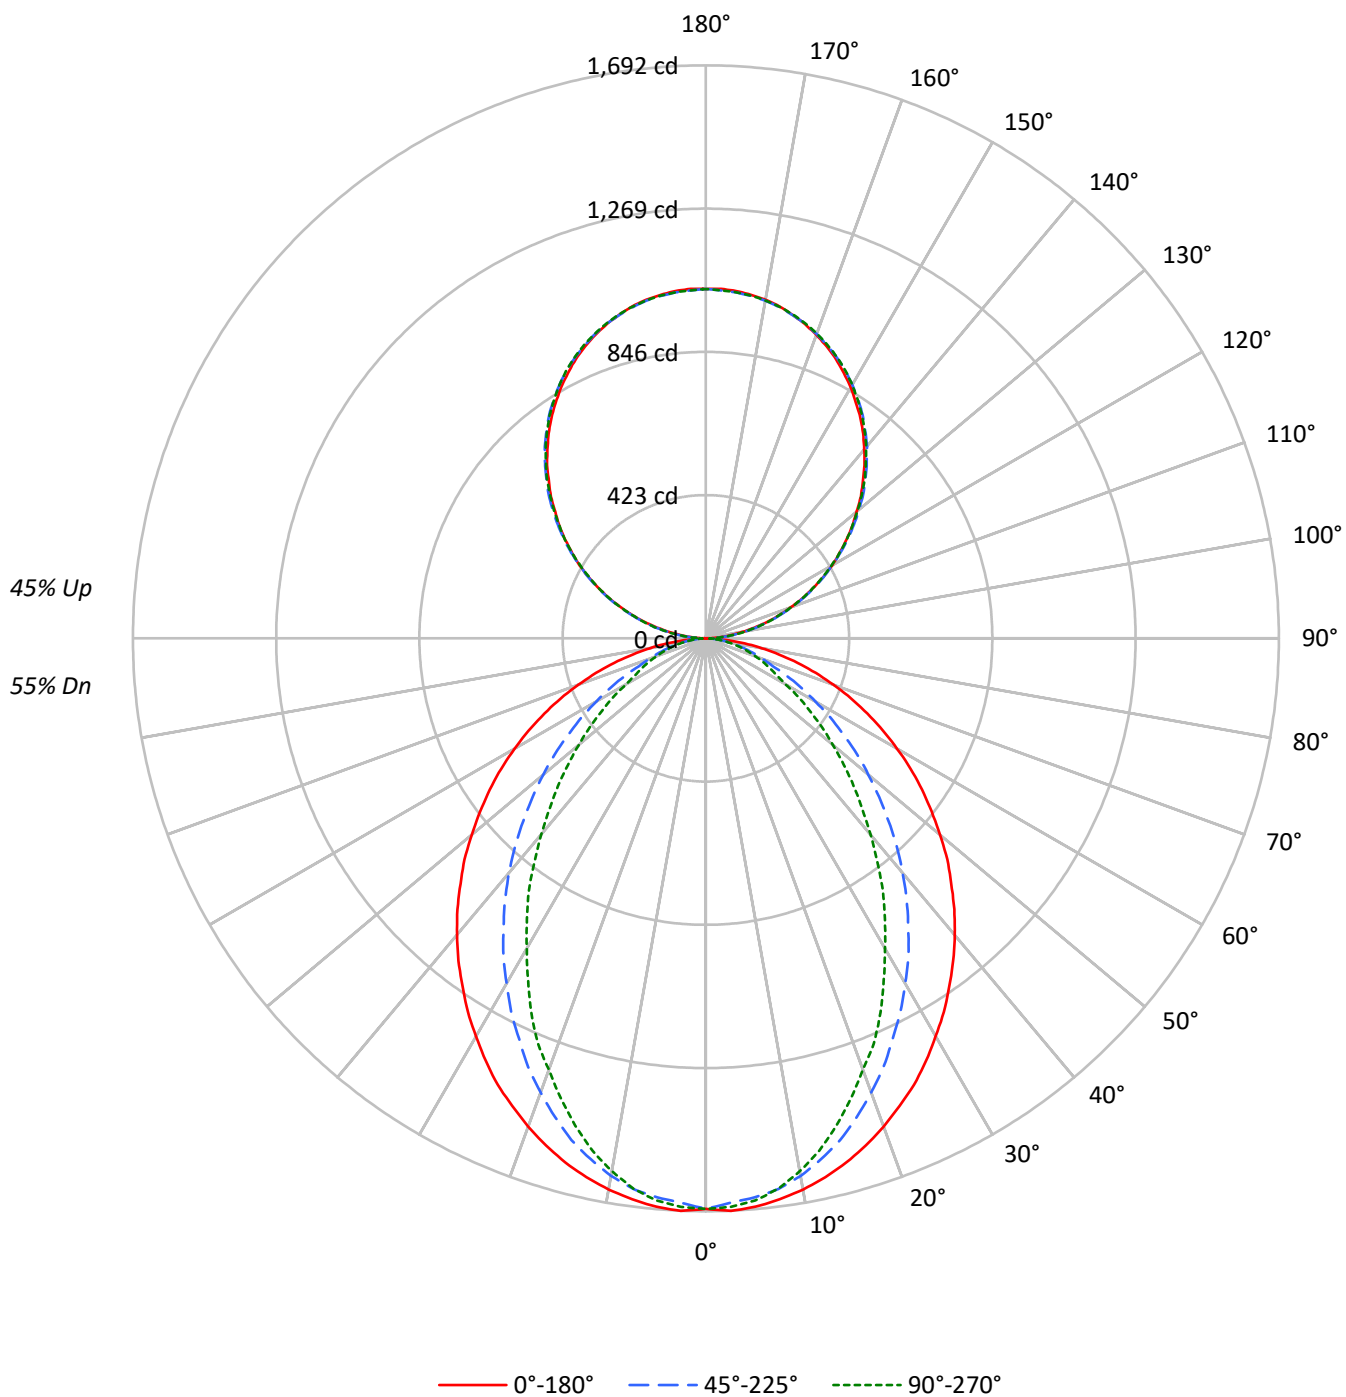

TEST NUMBER: P916212

CATALOG NUMBER: DFN2DIP-HX3F0-050D040US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52
2	91	84	78	73	84	78	73	69	67	63	60	57	55	52	48	46	45
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39
4	76	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	35	32	30
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	25	22	19
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1952	1952	1952
5°	1954	1919	1932
10°	1934	1880	1868
15°	1906	1817	1770
20°	1870	1730	1650
25°	1833	1633	1534
30°	1784	1533	1387
35°	1735	1426	1258
40°	1686	1316	1111
45°	1629	1193	977
50°	1570	1070	847
55°	1508	938	721
60°	1436	801	593
65°	1353	661	532
70°	1253	531	480
75°	1127	465	434
80°	945	386	373
85°	645	251	274

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1629 cd/sqm

TEST NUMBER: P916212

CATALOG NUMBER: DFN2DIP-HX3F0-050D040US930-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.9	2.5
10°-20°	433.5	6.8
20°-30°	608.6	9.6
30°-40°	663.4	10.4
40°-50°	609.7	9.6
50°-60°	478.8	7.5
60°-70°	311.7	4.9
70°-80°	160.4	2.5
80°-90°	43.9	0.7
90°-100°	63.8	1.0
100°-110°	202.8	3.2
110°-120°	347.0	5.5
120°-130°	456.4	7.2
130°-140°	512.3	8.1
140°-150°	502.4	7.9
150°-160°	421.4	6.6
160°-170°	279.5	4.4
170°-180°	97.7	1.5
0°-30°	1200.0	18.9
0°-40°	1863.4	29.3
0°-60°	2951.9	46.5
0°-90°	3467.9	54.6
90°-120°	613.6	9.7
90°-150°	2084.7	32.8
90°-180°	2883.0	45.4
0°-180°	6351.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1685	1685	1685	1685	1685	
5°	1685	1677	1657	1671	1667	160
15°	1602	1586	1534	1505	1490	452
25°	1455	1406	1305	1243	1220	669
35°	1253	1176	1042	945	912	784
45°	1025	922	762	654	617	791
55°	779	660	496	404	375	696
65°	526	402	265	214	209	521
75°	280	174	122	111	110	297
85°	66	34	29	29	29	75
90°	1	11	30	29	30	6
95°	45	54	56	56	54	51
105°	187	190	192	193	193	198
115°	348	353	352	351	348	344
125°	506	514	512	509	508	453
135°	655	665	667	666	663	506
145°	795	802	807	808	804	497
155°	910	912	915	919	916	419
165°	989	988	988	995	990	279
175°	1030	1027	1025	1031	1026	98
180°	1031	1031	1031	1031	1031	

TEST NUMBER: P916212

CATALOG NUMBER: DFN2DIP-HX3F0-050D040US930-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1684.8	1684.8	1684.8	1684.8	1684.8
2.5°	1692.4	1684.8	1668.0	1683.3	1680.2
5°	1684.8	1677.2	1657.3	1671.0	1666.6
7.5°	1671.0	1662.0	1640.6	1646.7	1639.0
10°	1652.8	1642.1	1611.7	1607.0	1597.9
12.5°	1629.9	1616.2	1575.0	1565.9	1549.1
15°	1602.5	1585.7	1533.9	1505.0	1489.7
17.5°	1570.4	1546.1	1482.0	1448.5	1424.0
20°	1533.9	1503.3	1427.1	1389.1	1355.4
22.5°	1494.3	1459.1	1370.7	1318.9	1296.1
25°	1454.6	1405.7	1305.1	1242.7	1219.7
27.5°	1407.4	1355.4	1244.1	1172.5	1137.4
30°	1357.1	1299.0	1177.0	1099.3	1058.1
32.5°	1308.2	1238.0	1113.1	1021.6	983.4
35°	1253.4	1175.6	1041.5	945.3	911.7
37.5°	1200.0	1116.1	974.4	869.0	831.0
40°	1143.5	1052.1	904.1	795.9	756.3
42.5°	1085.7	988.1	834.1	721.1	683.1
45°	1024.7	922.4	762.4	654.0	617.4
47.5°	966.7	858.5	693.8	585.5	552.0
50°	902.7	794.4	626.7	521.4	489.5
52.5°	840.1	725.7	562.6	462.0	433.1
55°	779.1	660.1	495.5	404.1	375.1
57.5°	716.6	594.7	436.1	350.7	326.3
60°	652.6	530.6	373.5	295.9	271.4
62.5°	590.1	468.1	320.2	247.0	234.9
65°	526.0	402.5	265.3	213.5	208.9
67.5°	465.0	341.5	213.5	187.5	183.0
70°	401.0	282.1	176.8	161.6	155.5
72.5°	340.1	227.1	147.9	135.7	132.6
75°	280.5	173.7	122.0	111.3	109.8
77.5°	221.1	123.4	96.1	89.9	86.8
80°	166.2	88.5	73.1	67.1	67.1
82.5°	115.9	59.5	50.3	47.2	47.2
85°	65.5	33.5	28.9	28.9	28.9
87.5°	24.5	12.1	12.1	10.7	10.7
90°	0.9	11.2	30.5	28.6	29.5
92.5°	19.2	26.1	27.1	28.0	28.0
95°	45.4	54.1	55.7	55.7	54.1
97.5°	75.6	83.6	87.1	87.1	87.1
100°	110.4	117.6	120.0	120.0	119.1
102.5°	147.1	152.4	155.8	156.7	155.8
105°	187.2	189.6	191.5	193.1	193.1
107.5°	227.0	230.7	230.7	231.3	227.0
110°	265.5	270.5	270.5	270.5	268.1

TEST NUMBER: P916212

CATALOG NUMBER: DFN2DIP-HX3F0-050D040US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	307.2	312.5	311.5	309.1	307.2
115°	348.2	353.3	351.6	350.7	348.2
117.5°	389.0	395.8	391.5	389.0	386.5
120°	430.1	436.8	430.1	430.1	427.2
122.5°	467.3	476.1	471.7	469.2	467.3
125°	506.5	514.3	511.8	509.0	508.1
127.5°	544.8	554.4	551.0	547.2	544.8
130°	580.5	591.7	590.2	588.3	584.9
132.5°	620.6	629.3	630.0	625.6	623.1
135°	655.2	664.8	666.7	665.7	663.2
137.5°	693.7	701.5	703.0	702.4	698.7
140°	727.6	735.4	739.7	739.7	736.3
142.5°	762.5	770.2	772.7	773.6	770.2
145°	795.4	801.6	806.6	807.6	804.1
147.5°	824.9	832.7	836.4	838.0	834.5
150°	855.4	860.7	864.1	866.9	864.1
152.5°	882.5	887.7	892.1	895.5	892.1
155°	909.5	912.0	914.8	919.2	916.3
157.5°	932.9	934.7	936.2	942.5	938.1
160°	953.7	955.5	956.4	961.7	958.0
162.5°	972.9	972.9	973.9	979.7	975.4
165°	989.4	988.5	988.5	994.7	990.3
167.5°	1004.4	1001.5	1001.5	1007.8	1003.4
170°	1015.5	1013.0	1012.1	1018.3	1013.0
172.5°	1023.3	1020.8	1019.9	1026.1	1020.8
175°	1029.6	1027.0	1025.2	1031.4	1026.1
177.5°	1033.0	1030.5	1028.6	1033.9	1028.6
180°	1031.4	1031.4	1031.4	1031.4	1031.4



TEST NUMBER: P916212

CATALOG NUMBER: DFN2DIP-HX3F0-050D040US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.85	10.72	10.77	11.65	12.86	5.82	6.69	6.74	7.63	8.83
	3H	11.52	12.30	12.45	13.24	14.47	7.01	7.79	7.94	8.73	9.96
	4H	12.12	12.86	13.07	13.81	15.05	7.46	8.19	8.41	9.14	10.38
	6H	12.54	13.22	13.50	14.17	15.43	7.78	8.45	8.74	9.41	10.66
	8H	12.66	13.31	13.63	14.28	15.53	7.87	8.51	8.83	9.48	10.73
	12H	12.72	13.34	13.70	14.30	15.58	7.91	8.52	8.88	9.49	10.76
4H	2H	9.87	10.60	10.82	11.55	12.79	6.42	7.15	7.37	8.10	9.34
	3H	11.69	12.30	12.66	13.28	14.54	7.77	8.38	8.73	9.36	10.61
	4H	12.38	12.94	13.35	13.91	15.19	8.31	8.87	9.29	9.84	11.12
	6H	12.89	13.37	13.88	14.37	15.64	8.73	9.21	9.71	10.20	11.48
	8H	13.06	13.51	14.05	14.50	15.79	8.85	9.30	9.84	10.29	11.58
	12H	13.15	13.56	14.16	14.56	15.86	8.92	9.32	9.92	10.33	11.63
8H	4H	12.35	12.80	13.34	13.79	15.08	8.59	9.04	9.58	10.03	11.32
	6H	12.91	13.28	13.92	14.31	15.60	9.10	9.47	10.12	10.51	11.79
	8H	13.12	13.44	14.14	14.47	15.77	9.29	9.62	10.31	10.64	11.94
	12H	13.25	13.54	14.28	14.55	15.91	9.41	9.69	10.43	10.71	12.06
12H	4H	12.30	12.70	13.31	13.71	15.01	8.60	9.00	9.60	10.01	11.30
	6H	12.88	13.21	13.90	14.23	15.54	9.15	9.48	10.17	10.50	11.80
	8H	13.10	13.39	14.12	14.40	15.75	9.36	9.64	10.38	10.66	12.01

END OF REPORT