

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916244

Luminaire Tested: DFN2DIP-HX3F0-060D060US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916244
REPORT IS A COMBINATION OF REPORTS P899250 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-060D060US930-RLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8487.2 lumens
Efficiency: N/A
Efficacy: 83.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 102
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916244

CATALOG NUMBER: DFN2DIP-HX3F0-060D060US930-RLLFLL

Luminous Intensity Polar Plot

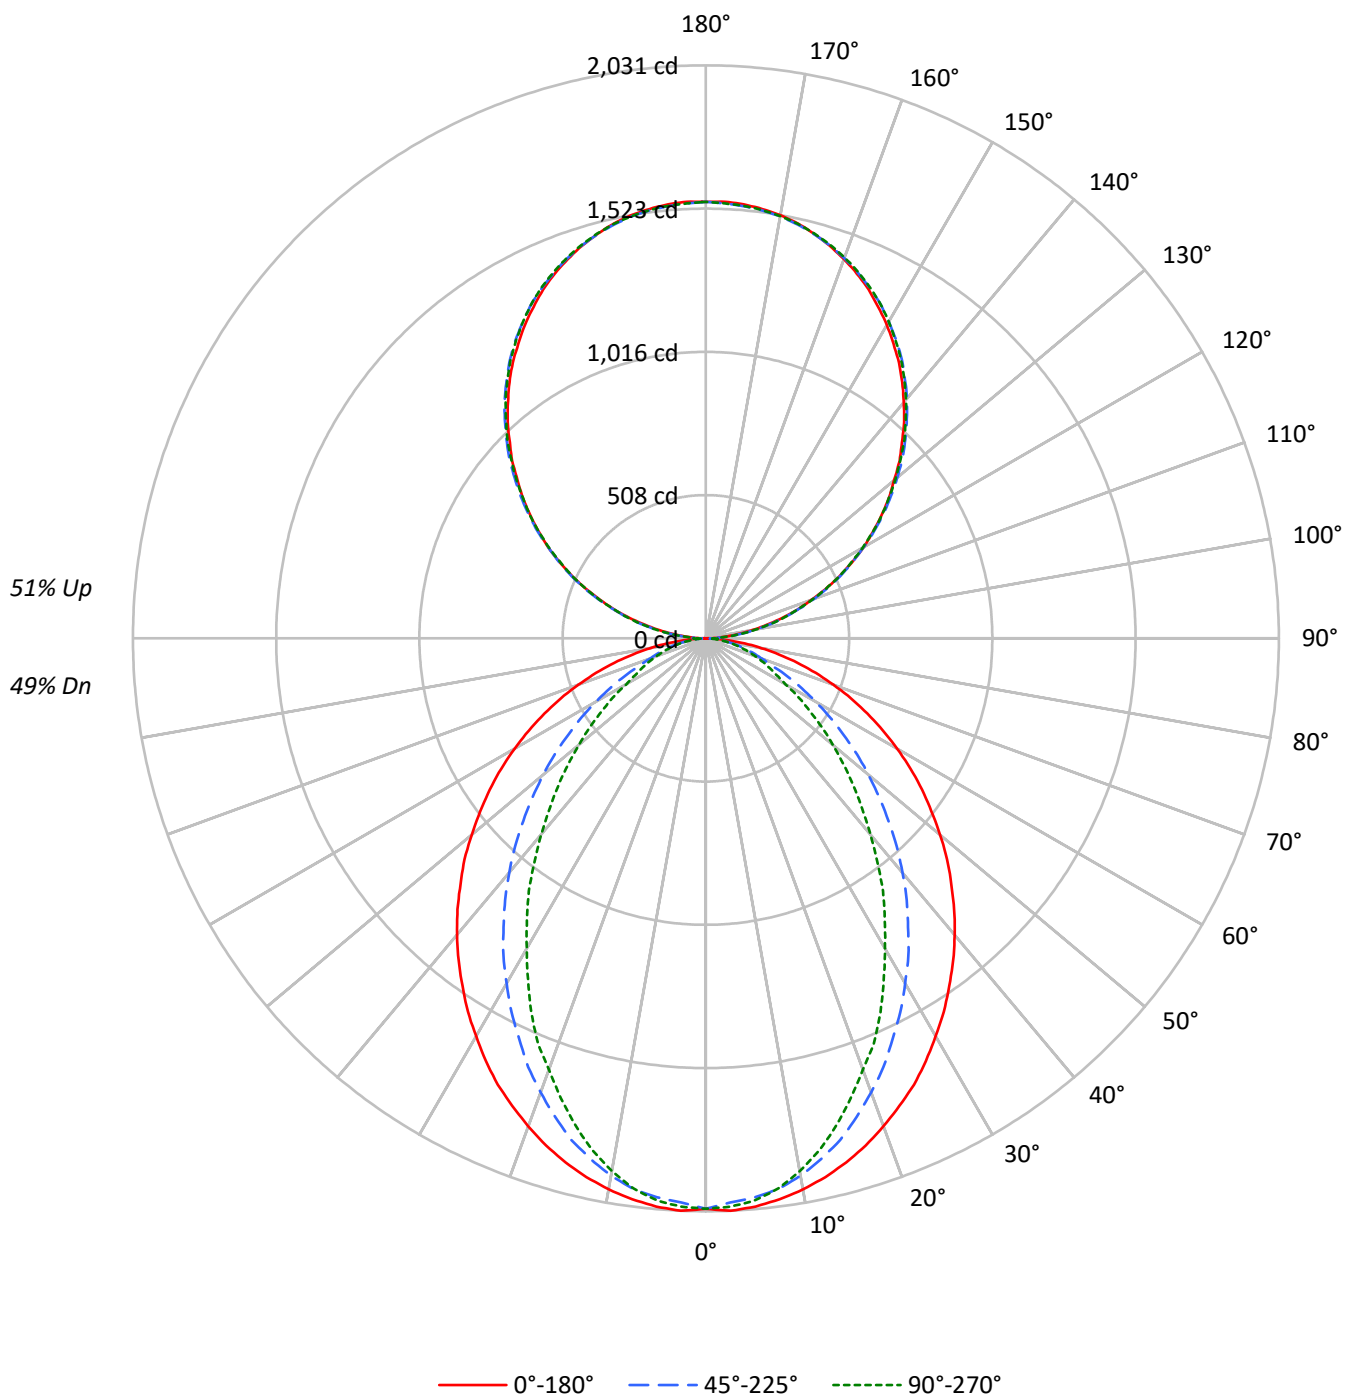

TEST NUMBER: P916244

CATALOG NUMBER: DFN2DIP-HX3F0-060D060US930-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2342	2342	2342
5°	2345	2303	2318
10°	2320	2256	2241
15°	2287	2180	2124
20°	2244	2076	1980
25°	2200	1959	1840
30°	2140	1840	1664
35°	2082	1712	1510
40°	2023	1579	1333
45°	1955	1432	1172
50°	1883	1284	1016
55°	1809	1126	865
60°	1723	961	711
65°	1624	794	639
70°	1504	637	576
75°	1352	558	521
80°	1133	463	448
85°	774	301	329

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1955 cd/sqm

TEST NUMBER: P916244

CATALOG NUMBER: DFN2DIP-HX3F0-060D060US930-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	189.5	2.2
10°-20°	520.2	6.1
20°-30°	730.3	8.6
30°-40°	796.1	9.4
40°-50°	731.7	8.6
50°-60°	574.6	6.8
60°-70°	374.0	4.4
70°-80°	192.5	2.3
80°-90°	53.5	0.6
90°-100°	95.7	1.1
100°-110°	304.2	3.6
110°-120°	520.6	6.1
120°-130°	684.6	8.1
130°-140°	768.4	9.1
140°-150°	753.5	8.9
150°-160°	632.1	7.4
160°-170°	419.2	4.9
170°-180°	146.5	1.7
0°-30°	1439.9	17.0
0°-40°	2236.0	26.3
0°-60°	3542.3	41.7
0°-90°	4162.4	49.0
90°-120°	920.5	10.8
90°-150°	3127.0	36.8
90°-180°	4325.0	51.0
0°-180°	8487.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2022	2022	2022	2022	2022	
5°	2022	2013	1989	2005	2000	192
15°	1923	1903	1841	1806	1788	542
25°	1746	1687	1566	1491	1464	803
35°	1504	1411	1250	1134	1094	941
45°	1230	1107	915	785	741	950
55°	935	792	595	485	450	835
65°	631	483	318	256	251	626
75°	337	208	146	134	132	356
85°	79	40	35	35	35	90
90°	1	17	46	43	44	8
95°	68	81	84	84	81	76
105°	281	284	287	290	290	296
115°	522	530	528	526	522	517
125°	760	771	768	764	762	679
135°	983	997	1000	999	995	760
145°	1193	1202	1210	1211	1206	745
155°	1364	1368	1372	1379	1374	628
165°	1484	1483	1483	1492	1486	419
175°	1544	1541	1538	1547	1539	147
180°	1547	1547	1547	1547	1547	

TEST NUMBER: P916244

CATALOG NUMBER: DFN2DIP-HX3F0-060D060US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2021.8	2021.8	2021.8	2021.8	2021.8
2.5°	2030.9	2021.8	2001.6	2020.0	2016.3
5°	2021.8	2012.6	1988.8	2005.3	1999.8
7.5°	2005.3	1994.4	1968.8	1976.0	1966.8
10°	1983.3	1970.5	1934.1	1928.4	1917.5
12.5°	1956.0	1939.4	1889.9	1879.1	1858.9
15°	1923.0	1902.7	1840.6	1805.9	1787.6
17.5°	1884.6	1855.2	1778.3	1738.1	1708.9
20°	1840.6	1803.9	1712.5	1666.9	1626.5
22.5°	1793.1	1750.9	1644.8	1582.7	1555.3
25°	1745.6	1686.9	1566.2	1491.3	1463.7
27.5°	1688.9	1626.5	1493.0	1407.0	1364.9
30°	1628.5	1558.8	1412.4	1319.2	1269.7
32.5°	1569.9	1485.6	1335.8	1225.9	1180.1
35°	1504.1	1410.7	1249.8	1134.4	1094.0
37.5°	1440.0	1339.2	1169.2	1042.8	997.2
40°	1372.2	1262.6	1084.9	955.0	907.5
42.5°	1302.8	1185.7	1000.9	865.4	819.8
45°	1229.6	1106.8	914.9	784.8	740.9
47.5°	1160.1	1030.2	832.6	702.5	662.3
50°	1083.2	953.3	752.0	625.7	587.4
52.5°	1008.0	870.8	675.1	554.4	519.7
55°	934.9	792.2	594.6	484.9	450.1
57.5°	860.0	713.5	523.3	420.9	391.5
60°	783.1	636.7	448.3	355.1	325.7
62.5°	708.2	561.8	384.2	296.4	281.8
65°	631.3	483.0	318.4	256.2	250.6
67.5°	558.1	409.8	256.2	225.0	219.6
70°	481.2	338.5	212.1	194.0	186.5
72.5°	408.1	272.6	177.4	162.9	159.1
75°	336.6	208.5	146.3	133.5	131.8
77.5°	265.4	148.1	115.3	107.9	104.3
80°	199.3	106.2	87.7	80.6	80.6
82.5°	139.0	71.4	60.3	56.7	56.7
85°	78.6	40.2	34.7	34.7	34.7
87.5°	29.4	14.6	14.6	12.8	12.8
90°	1.4	16.8	45.7	42.9	44.3
92.5°	28.9	39.2	40.6	42.0	42.0
95°	68.1	81.1	83.5	83.5	81.1
97.5°	113.3	125.5	130.6	130.6	130.6
100°	165.6	176.3	180.0	180.0	178.6
102.5°	220.6	228.5	233.7	235.1	233.7
105°	280.8	284.5	287.3	289.7	289.7
107.5°	340.5	346.1	346.1	347.0	340.5
110°	398.4	405.8	405.8	405.8	402.0

TEST NUMBER: P916244

CATALOG NUMBER: DFN2DIP-HX3F0-060D060US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	460.8	468.7	467.3	463.6	460.8
115°	522.4	529.9	527.5	526.1	522.4
117.5°	583.5	593.8	587.2	583.5	579.8
120°	645.1	655.3	645.1	645.1	640.8
122.5°	701.0	714.0	707.5	703.8	701.0
125°	759.8	771.4	767.7	763.5	762.1
127.5°	817.2	831.6	826.5	820.9	817.2
130°	870.8	887.6	885.3	882.5	877.3
132.5°	931.0	944.0	944.9	938.4	934.7
135°	982.8	997.2	1000.0	998.6	994.8
137.5°	1040.6	1052.2	1054.6	1053.6	1048.1
140°	1091.4	1103.1	1109.6	1109.6	1104.5
142.5°	1143.6	1155.3	1159.0	1160.4	1155.3
145°	1193.1	1202.4	1209.9	1211.3	1206.2
147.5°	1237.4	1249.0	1254.7	1256.9	1251.8
150°	1283.1	1291.0	1296.2	1300.3	1296.2
152.5°	1323.6	1331.6	1338.1	1343.3	1338.1
155°	1364.2	1368.0	1372.1	1378.8	1374.5
157.5°	1399.2	1402.1	1404.4	1413.7	1407.2
160°	1430.5	1433.3	1434.7	1442.6	1437.0
162.5°	1459.4	1459.4	1460.8	1469.7	1463.1
165°	1484.1	1482.7	1482.7	1492.1	1485.6
167.5°	1506.5	1502.4	1502.4	1511.6	1505.1
170°	1523.3	1519.6	1518.2	1527.5	1519.6
172.5°	1535.0	1531.2	1529.8	1539.1	1531.2
175°	1544.3	1540.6	1537.7	1547.1	1539.1
177.5°	1549.4	1545.7	1542.9	1550.8	1542.9
180°	1547.1	1547.1	1547.1	1547.1	1547.1

TEST NUMBER: P916244

CATALOG NUMBER: DFN2DIP-HX3F0-060D060US930-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.97	10.79	10.94	11.77	13.06	5.94	6.77	6.92	7.75	9.04
	3H	11.64	12.37	12.62	13.36	14.67	7.13	7.86	8.11	8.85	10.16
	4H	12.24	12.94	13.24	13.93	15.25	7.58	8.27	8.57	9.26	10.58
	6H	12.65	13.29	13.66	14.29	15.62	7.89	8.53	8.90	9.53	10.86
	8H	12.78	13.39	13.79	14.40	15.73	7.98	8.59	8.99	9.60	10.93
	12H	12.84	13.41	13.85	14.42	15.77	8.02	8.60	9.04	9.61	10.96
4H	2H	9.98	10.68	10.99	11.67	12.99	6.54	7.23	7.54	8.22	9.54
	3H	11.80	12.38	12.82	13.41	14.74	7.88	8.46	8.89	9.48	10.81
	4H	12.49	13.02	13.51	14.03	15.39	8.42	8.95	9.44	9.97	11.32
	6H	13.00	13.45	14.03	14.49	15.84	8.84	9.29	9.87	10.33	11.68
	8H	13.17	13.59	14.20	14.62	15.99	8.96	9.39	9.99	10.42	11.78
	12H	13.26	13.64	14.31	14.69	16.06	9.03	9.41	10.07	10.45	11.83
8H	4H	12.46	12.88	13.49	13.91	15.28	8.70	9.12	9.73	10.15	11.52
	6H	13.01	13.36	14.07	14.44	15.80	9.21	9.56	10.26	10.63	12.00
	8H	13.22	13.53	14.29	14.59	15.97	9.40	9.70	10.46	10.76	12.15
	12H	13.36	13.63	14.42	14.68	16.11	9.51	9.78	10.58	10.84	12.26
12H	4H	12.41	12.79	13.46	13.84	15.21	8.70	9.08	9.75	10.13	11.50
	6H	12.99	13.30	14.05	14.35	15.74	9.26	9.56	10.32	10.62	12.01
	8H	13.20	13.47	14.27	14.53	15.95	9.46	9.73	10.53	10.79	12.21