

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916265

Luminaire Tested: DFN2DIP-HX3F0-070D050US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916265
REPORT IS A COMBINATION OF REPORTS P900758 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-070D050US930-RLLONL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8886.7 lumens
Efficiency: N/A
Efficacy: 84.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 105.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916265

CATALOG NUMBER: DFN2DIP-HX3F0-070D050US930-RLLONL

Luminous Intensity Polar Plot

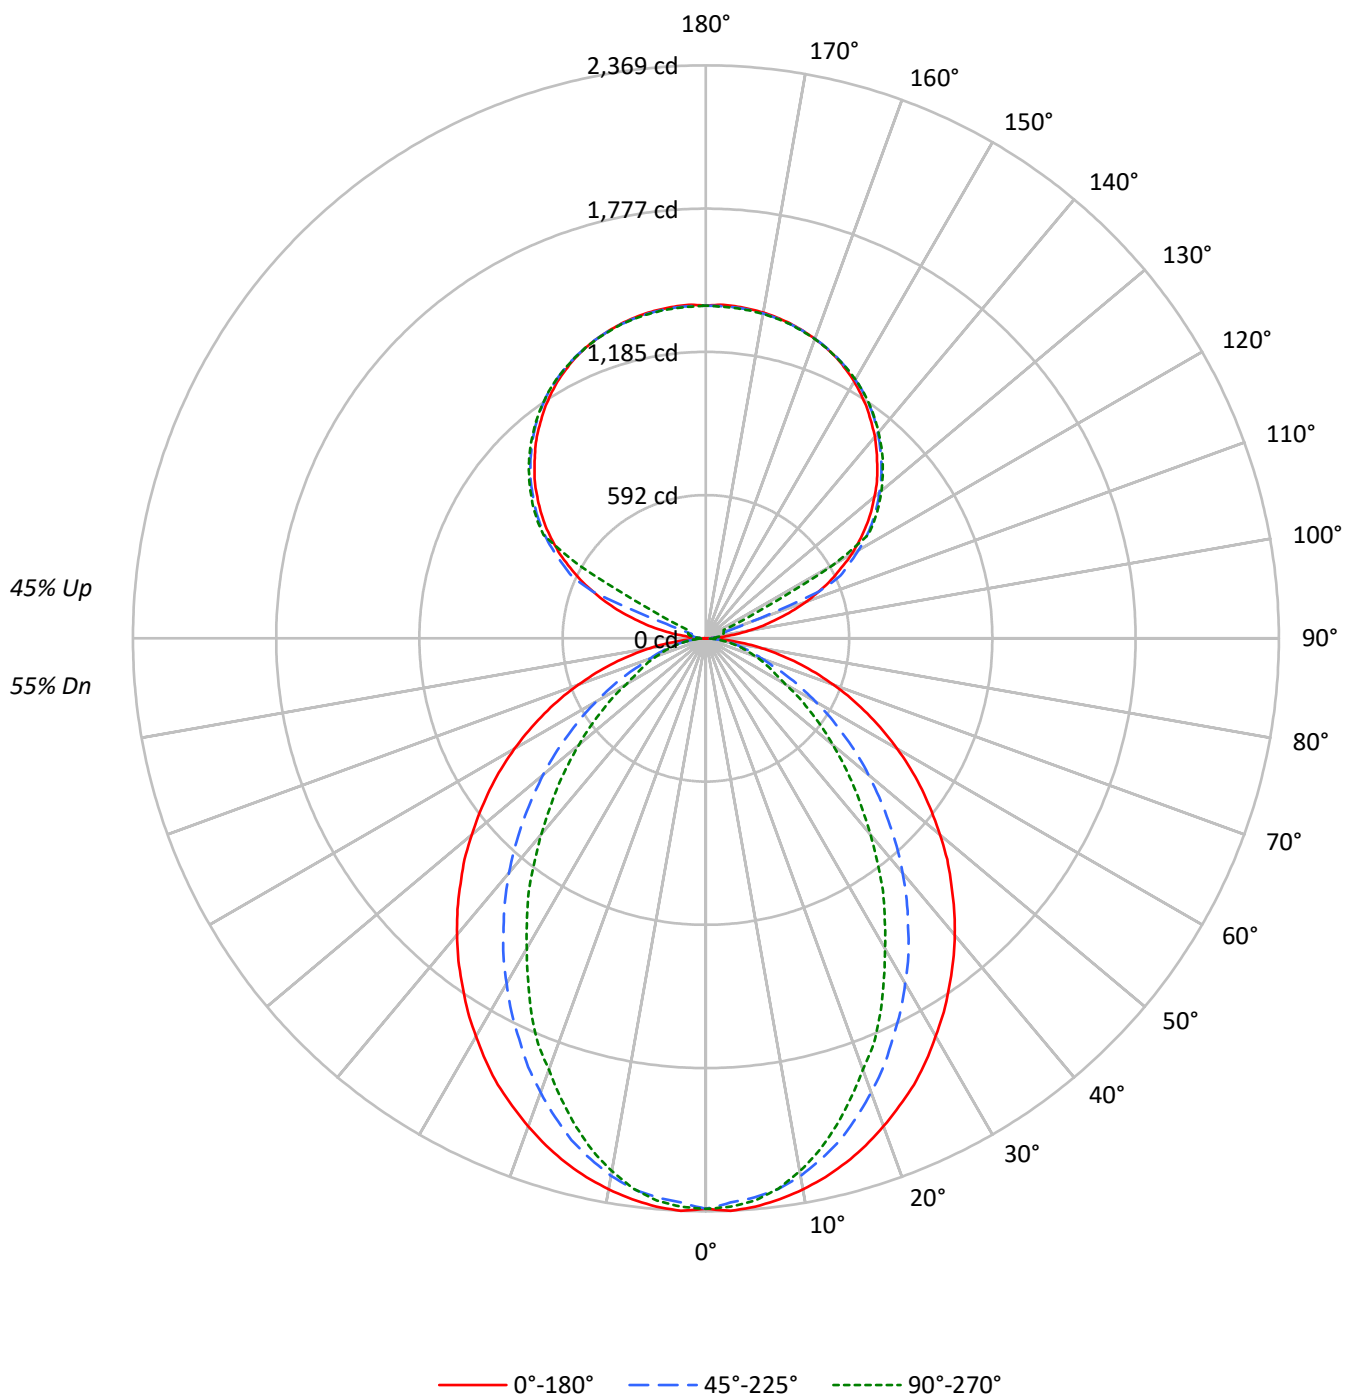

TEST NUMBER: P916265

CATALOG NUMBER: DFN2DIP-HX3F0-070D050US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52
2	91	84	78	73	84	78	73	69	67	63	60	57	55	52	48	46	45
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39
4	76	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	35	32	30
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	25	22	19
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2732	2732	2732
5°	2735	2687	2705
10°	2707	2632	2615
15°	2669	2543	2478
20°	2618	2422	2310
25°	2566	2286	2147
30°	2497	2146	1942
35°	2429	1997	1761
40°	2360	1842	1555
45°	2280	1671	1368
50°	2197	1498	1185
55°	2111	1314	1010
60°	2010	1121	830
65°	1895	926	745
70°	1754	743	672
75°	1578	651	608
80°	1323	540	523
85°	903	351	384

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2280 cd/sqm

TEST NUMBER: P916265

CATALOG NUMBER: DFN2DIP-HX3F0-070D050US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	221.1	2.5
10°-20°	606.9	6.8
20°-30°	852.0	9.6
30°-40°	928.8	10.5
40°-50°	853.6	9.6
50°-60°	670.4	7.5
60°-70°	436.4	4.9
70°-80°	224.6	2.5
80°-90°	59.7	0.7
90°-100°	45.4	0.5
100°-110°	169.1	1.9
110°-120°	448.5	5.0
120°-130°	743.9	8.4
130°-140°	790.2	8.9
140°-150°	734.4	8.3
150°-160°	590.4	6.6
160°-170°	380.5	4.3
170°-180°	130.9	1.5
0°-30°	1679.9	18.9
0°-40°	2608.7	29.4
0°-60°	4132.7	46.5
0°-90°	4853.4	54.6
90°-120°	663.0	7.5
90°-150°	2931.5	33.0
90°-180°	4033.0	45.4
0°-180°	8886.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2359	2359	2359	2359	2359	
5°	2359	2348	2320	2340	2333	224
15°	2244	2220	2147	2107	2086	632
25°	2036	1968	1827	1740	1708	937
35°	1755	1646	1458	1324	1276	1098
45°	1434	1291	1067	916	864	1108
55°	1091	924	694	566	525	975
65°	736	564	371	299	292	730
75°	393	243	171	156	154	415
85°	92	47	40	40	40	105
90°	1	12	20	25	27	8
95°	65	32	39	44	43	77
105°	303	333	61	72	76	323
115°	572	589	614	153	82	564
125°	809	822	841	848	851	722
135°	1002	1018	1026	1036	1034	774
145°	1162	1161	1178	1185	1180	727
155°	1279	1270	1282	1288	1280	589
165°	1348	1342	1345	1352	1345	381
175°	1379	1372	1374	1381	1371	131
180°	1376	1376	1376	1376	1376	

TEST NUMBER: P916265

CATALOG NUMBER: DFN2DIP-HX3F0-070D050US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2358.7	2358.7	2358.7	2358.7	2358.7
2.5°	2369.3	2358.7	2335.2	2356.7	2352.4
5°	2358.7	2348.1	2320.3	2339.5	2333.1
7.5°	2339.5	2326.8	2296.9	2305.3	2294.7
10°	2313.9	2299.0	2256.3	2249.8	2237.1
12.5°	2281.9	2262.7	2205.0	2192.3	2168.7
15°	2243.5	2219.9	2147.4	2106.9	2085.6
17.5°	2198.6	2164.5	2074.8	2027.8	1993.6
20°	2147.4	2104.6	1998.0	1944.7	1897.6
22.5°	2092.0	2042.8	1918.9	1846.4	1814.5
25°	2036.5	1968.0	1827.2	1739.8	1707.6
27.5°	1970.3	1897.6	1741.8	1641.5	1592.4
30°	1899.9	1818.6	1647.8	1539.1	1481.4
32.5°	1831.5	1733.2	1558.4	1430.2	1376.7
35°	1754.7	1645.8	1458.1	1323.6	1276.4
37.5°	1680.0	1562.4	1364.1	1216.6	1163.4
40°	1600.9	1473.0	1265.8	1114.3	1058.7
42.5°	1519.9	1383.3	1167.7	1009.6	956.4
45°	1434.5	1291.4	1067.4	915.7	864.5
47.5°	1353.4	1201.9	971.3	819.6	772.7
50°	1263.7	1112.2	877.3	729.9	685.3
52.5°	1176.1	1015.9	787.7	646.8	606.3
55°	1090.7	924.2	693.7	565.7	525.2
57.5°	1003.3	832.5	610.6	491.0	456.8
60°	913.6	742.8	522.9	414.3	380.0
62.5°	826.1	655.4	448.2	345.8	328.8
65°	736.5	563.5	371.4	299.0	292.4
67.5°	651.1	478.1	299.0	262.4	256.2
70°	561.4	394.9	247.5	226.2	217.6
72.5°	476.1	318.0	207.0	190.0	185.7
75°	392.7	243.2	170.7	155.8	153.8
77.5°	309.6	172.8	134.5	125.9	121.6
80°	232.6	123.8	102.4	94.0	94.0
82.5°	162.2	83.3	70.4	66.1	66.1
85°	91.7	46.9	40.5	40.5	40.5
87.5°	34.2	17.0	17.0	14.9	14.9
90°	1.0	11.9	19.9	24.9	26.8
92.5°	24.9	21.0	23.9	25.9	26.8
95°	64.7	31.8	38.8	43.9	42.8
97.5°	116.4	34.9	50.7	53.8	54.7
100°	176.3	39.9	56.7	64.7	66.7
102.5°	241.9	239.9	58.8	69.6	72.7
105°	302.6	332.6	60.7	71.7	75.7
107.5°	373.3	398.1	62.8	73.6	77.7
110°	441.1	461.9	174.2	74.7	78.6

TEST NUMBER: P916265

CATALOG NUMBER: DFN2DIP-HX3F0-070D050US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	504.8	522.6	505.7	76.6	79.7
115°	572.4	589.3	614.2	153.4	81.7
117.5°	631.1	651.0	668.1	525.5	264.8
120°	696.8	711.8	729.7	741.7	607.2
122.5°	752.5	768.5	788.5	794.4	795.5
125°	809.3	822.3	841.2	848.2	851.2
127.5°	861.0	875.0	890.1	899.9	900.9
130°	909.9	925.9	936.7	947.7	946.8
132.5°	959.7	972.7	983.5	992.5	991.6
135°	1001.5	1017.5	1026.3	1036.4	1034.4
137.5°	1045.2	1057.2	1067.2	1077.2	1074.2
140°	1088.0	1096.1	1106.9	1115.9	1111.0
142.5°	1124.0	1131.0	1143.9	1151.8	1146.8
145°	1161.8	1160.7	1177.6	1184.6	1179.7
147.5°	1194.6	1191.6	1208.5	1213.5	1209.6
150°	1226.5	1219.5	1235.4	1241.4	1236.4
152.5°	1253.3	1245.4	1260.3	1266.3	1259.3
155°	1279.2	1270.3	1282.2	1288.2	1280.3
157.5°	1300.1	1292.2	1301.1	1308.1	1300.1
160°	1318.1	1312.1	1318.1	1324.0	1317.0
162.5°	1333.9	1328.0	1332.9	1339.9	1331.0
165°	1347.9	1342.0	1344.9	1351.8	1344.9
167.5°	1358.9	1352.8	1355.9	1362.9	1353.9
170°	1367.8	1361.8	1363.8	1370.8	1361.8
172.5°	1373.8	1367.8	1369.9	1376.8	1367.8
175°	1378.8	1371.7	1373.8	1380.7	1370.8
177.5°	1380.7	1373.8	1374.8	1381.8	1372.8
180°	1375.7	1375.7	1375.7	1375.7	1375.7

TEST NUMBER: P916265

CATALOG NUMBER: DFN2DIP-HX3F0-070D050US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.02	11.89	11.94	12.82	14.03	6.99	7.86	7.92	8.80	10.01
	3H	12.69	13.47	13.62	14.41	15.64	8.18	8.96	9.12	9.90	11.13
	4H	13.29	14.03	14.24	14.98	16.22	8.63	9.36	9.58	10.31	11.55
	6H	13.71	14.39	14.67	15.34	16.60	8.95	9.62	9.91	10.58	11.83
	8H	13.84	14.48	14.80	15.45	16.70	9.04	9.68	10.01	10.65	11.90
	12H	13.90	14.51	14.87	15.47	16.75	9.08	9.69	10.05	10.66	11.93
4H	2H	11.04	11.77	11.99	12.72	13.96	7.59	8.32	8.54	9.27	10.51
	3H	12.86	13.47	13.83	14.45	15.71	8.94	9.55	9.90	10.53	11.78
	4H	13.55	14.11	14.52	15.08	16.36	9.48	10.04	10.46	11.01	12.29
	6H	14.06	14.54	15.05	15.54	16.81	9.90	10.38	10.89	11.38	12.65
	8H	14.23	14.68	15.22	15.67	16.96	10.03	10.47	11.01	11.46	12.76
	12H	14.32	14.73	15.33	15.73	17.03	10.09	10.49	11.10	11.50	12.80
8H	4H	13.52	13.97	14.51	14.96	16.25	9.76	10.21	10.75	11.20	12.49
	6H	14.08	14.45	15.09	15.48	16.77	10.27	10.64	11.29	11.68	12.97
	8H	14.29	14.62	15.31	15.64	16.94	10.46	10.79	11.48	11.81	13.12
	12H	14.43	14.71	15.45	15.73	17.08	10.58	10.86	11.60	11.88	13.23
12H	4H	13.47	13.88	14.48	14.88	16.18	9.77	10.17	10.77	11.18	12.47
	6H	14.05	14.38	15.07	15.40	16.71	10.32	10.65	11.34	11.67	12.98
	8H	14.27	14.56	15.29	15.57	16.92	10.53	10.82	11.55	11.83	13.18