

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918964

Luminaire Tested: DFN2DIP-HX3F0-060D040US935-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918964
REPORT IS A COMBINATION OF REPORTS P899222 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-060D040US935-RLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7439.0 lumens
Efficiency: N/A
Efficacy: 86.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 86.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918964

CATALOG NUMBER: DFN2DIP-HX3F0-060D040US935-RLLFLL

Luminous Intensity Polar Plot

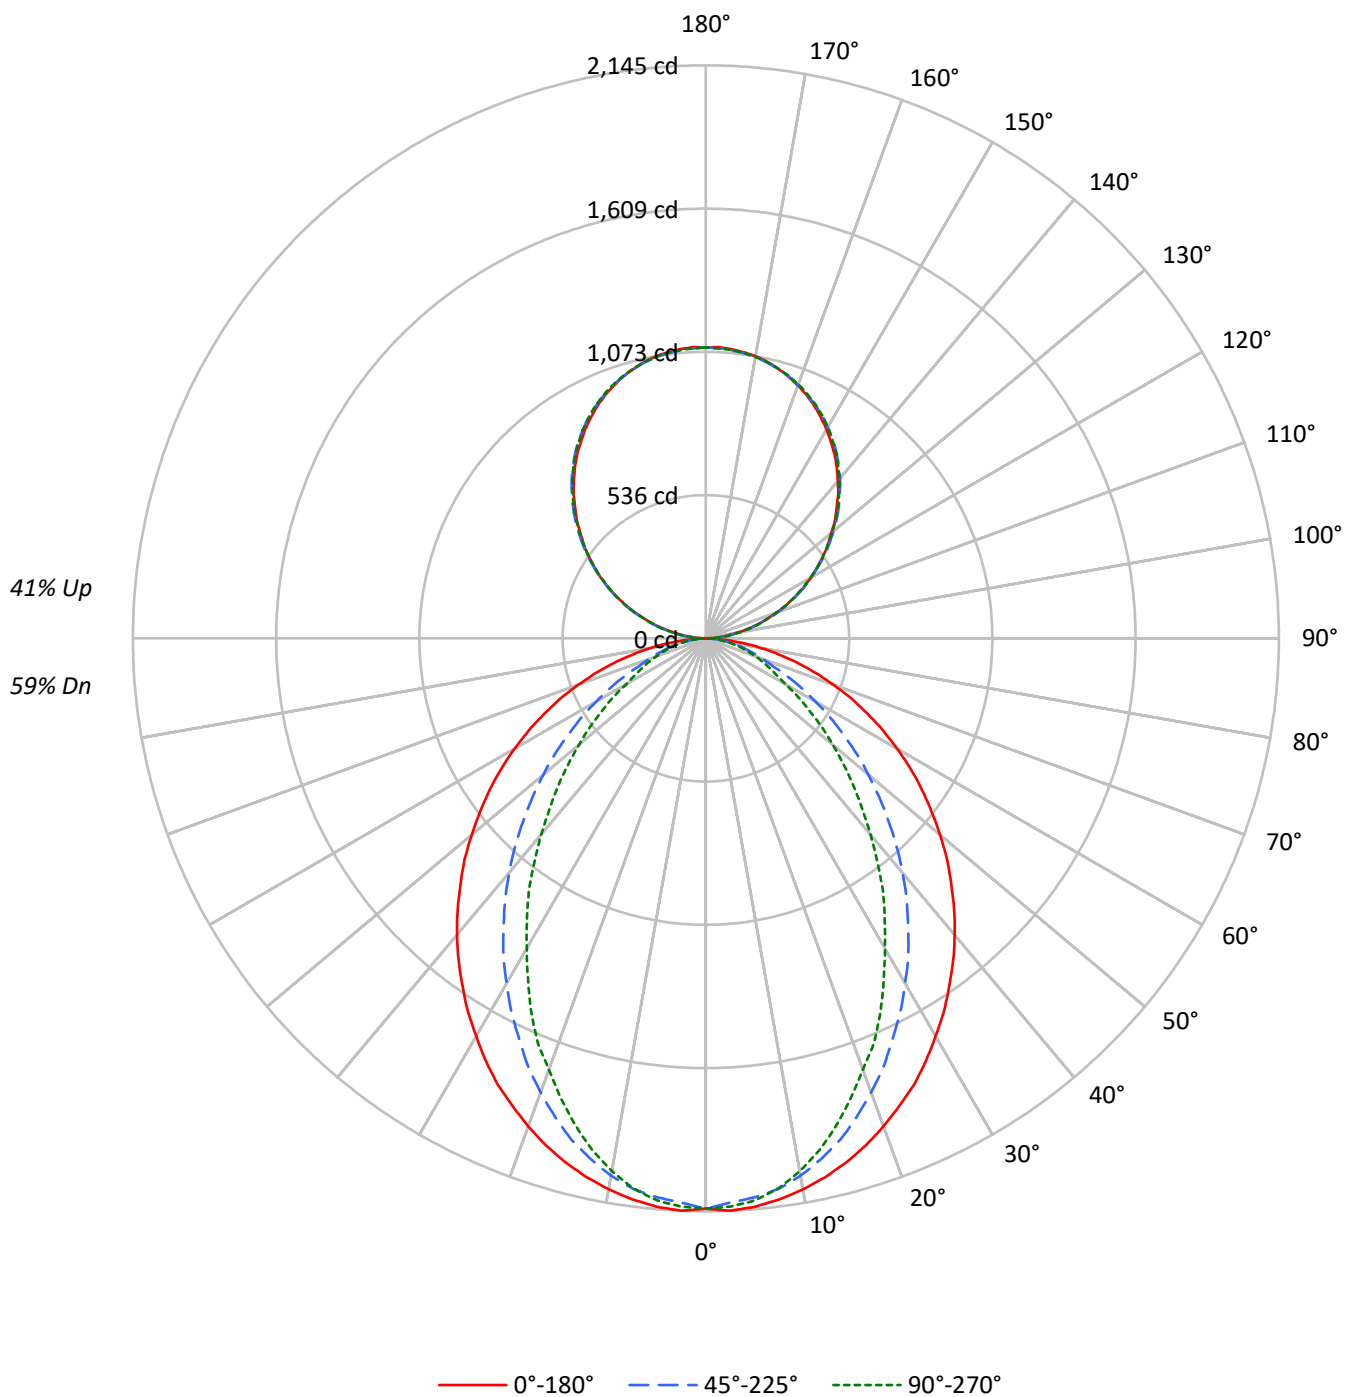

TEST NUMBER: P918964

CATALOG NUMBER: DFN2DIP-HX3F0-060D040US935-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88		76	76	76		64
1	100	96	92	89	94	90	87	84	78	76	74		68	66	64		58
2	92	85	79	74	86	79	74	70	69	65	62		60	57	55		52
3	84	75	68	62	78	70	64	59	62	57	53		54	50	47		46
4	77	67	59	53	72	63	56	51	55	50	46		48	44	41		42
5	71	60	52	46	66	56	49	44	50	44	40		44	39	36		38
6	66	54	46	40	61	51	44	39	45	39	35		40	35	32		35
7	61	49	41	36	57	46	39	34	41	35	31		36	32	28		32
8	57	45	37	32	53	42	35	30	38	32	28		33	29	25		29
9	53	41	34	29	50	39	32	27	35	29	25		31	26	23		27
10	50	38	31	26	47	36	29	25	32	27	23		29	24	21		25

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2473	2473	2473
5°	2476	2432	2448
10°	2450	2383	2367
15°	2415	2302	2243
20°	2370	2192	2091
25°	2323	2069	1944
30°	2260	1943	1758
35°	2199	1807	1594
40°	2136	1667	1408
45°	2064	1512	1238
50°	1989	1356	1073
55°	1911	1189	914
60°	1820	1015	751
65°	1715	838	675
70°	1588	673	608
75°	1428	589	551
80°	1197	489	473
85°	818	318	348

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2064 cd/sqm

TEST NUMBER: P918964

CATALOG NUMBER: DFN2DIP-HX3F0-060D040US935-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	200.1	2.7
10°-20°	549.3	7.4
20°-30°	771.2	10.4
30°-40°	840.7	11.3
40°-50°	772.7	10.4
50°-60°	606.8	8.2
60°-70°	395.0	5.3
70°-80°	203.3	2.7
80°-90°	55.0	0.7
90°-100°	67.4	0.9
100°-110°	214.2	2.9
110°-120°	366.5	4.9
120°-130°	482.0	6.5
130°-140°	541.0	7.3
140°-150°	530.5	7.1
150°-160°	445.0	6.0
160°-170°	295.1	4.0
170°-180°	103.2	1.4
0°-30°	1520.7	20.4
0°-40°	2361.4	31.7
0°-60°	3740.9	50.3
0°-90°	4394.2	59.1
90°-120°	648.0	8.7
90°-150°	2201.5	29.6
90°-180°	3045.0	40.9
0°-180°	7439.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2135	2135	2135	2135	2135	
5°	2135	2126	2100	2118	2112	202
15°	2031	2009	1944	1907	1888	572
25°	1843	1782	1654	1575	1546	848
35°	1588	1490	1320	1198	1155	994
45°	1298	1169	966	829	782	1003
55°	987	837	628	512	475	882
65°	667	510	336	271	265	661
75°	356	220	154	141	139	376
85°	83	42	37	37	37	95
90°	1	12	32	30	31	7
95°	48	57	59	59	57	53
105°	198	200	202	204	204	209
115°	368	373	371	370	368	364
125°	535	543	540	538	537	478
135°	692	702	704	703	700	535
145°	840	846	852	853	849	525
155°	960	963	966	971	968	442
165°	1045	1044	1044	1050	1046	295
175°	1087	1085	1083	1089	1084	103
180°	1089	1089	1089	1089	1089	

TEST NUMBER: P918964

CATALOG NUMBER: DFN2DIP-HX3F0-060D040US935-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2135.1	2135.1	2135.1	2135.1	2135.1
2.5°	2144.7	2135.1	2113.7	2133.2	2129.3
5°	2135.1	2125.5	2100.2	2117.7	2111.9
7.5°	2117.7	2106.2	2079.1	2086.7	2077.1
10°	2094.5	2080.9	2042.5	2036.5	2025.0
12.5°	2065.6	2048.1	1995.9	1984.4	1963.1
15°	2030.7	2009.4	1943.8	1907.1	1887.8
17.5°	1990.2	1959.2	1878.0	1835.6	1804.7
20°	1943.8	1905.0	1808.5	1760.3	1717.7
22.5°	1893.6	1849.1	1737.0	1671.4	1642.4
25°	1843.4	1781.5	1654.0	1574.9	1545.7
27.5°	1783.6	1717.7	1576.7	1485.8	1441.4
30°	1719.8	1646.1	1491.6	1393.2	1340.9
32.5°	1657.9	1568.9	1410.7	1294.6	1246.2
35°	1588.4	1489.8	1319.8	1198.0	1155.4
37.5°	1520.7	1414.3	1234.8	1101.3	1053.1
40°	1449.1	1333.3	1145.7	1008.6	958.4
42.5°	1375.8	1252.1	1057.0	913.9	865.7
45°	1298.5	1168.9	966.2	828.8	782.5
47.5°	1225.1	1088.0	879.3	741.9	699.5
50°	1143.9	1006.8	794.2	660.7	620.3
52.5°	1064.5	919.6	713.0	585.5	548.8
55°	987.3	836.6	627.9	512.1	475.4
57.5°	908.2	753.5	552.7	444.4	413.5
60°	827.0	672.4	473.4	375.0	344.0
62.5°	747.9	593.3	405.7	313.1	297.6
65°	666.7	510.1	336.2	270.6	264.7
67.5°	589.4	432.7	270.6	237.6	231.9
70°	508.2	357.5	224.0	204.8	197.0
72.5°	430.9	287.8	187.4	172.0	168.1
75°	355.5	220.2	154.5	141.0	139.2
77.5°	280.3	156.4	121.7	114.0	110.1
80°	210.5	112.1	92.6	85.1	85.1
82.5°	146.8	75.4	63.7	59.8	59.8
85°	83.0	42.4	36.7	36.7	36.7
87.5°	31.0	15.4	15.4	13.5	13.5
90°	0.9	11.8	32.2	30.2	31.2
92.5°	20.3	27.6	28.6	29.5	29.5
95°	48.0	57.2	58.8	58.8	57.2
97.5°	79.8	88.3	92.0	92.0	92.0
100°	116.6	124.2	126.7	126.7	125.8
102.5°	155.3	160.9	164.5	165.5	164.5
105°	197.7	200.3	202.2	203.9	203.9
107.5°	239.7	243.7	243.7	244.3	239.7
110°	280.4	285.7	285.7	285.7	283.1

TEST NUMBER: P918964

CATALOG NUMBER: DFN2DIP-HX3F0-060D040US935-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	324.4	330.0	329.0	326.4	324.4
115°	367.7	373.1	371.3	370.4	367.7
117.5°	410.8	418.0	413.5	410.8	408.2
120°	454.2	461.3	454.2	454.2	451.2
122.5°	493.5	502.7	498.2	495.5	493.5
125°	534.9	543.1	540.5	537.5	536.6
127.5°	575.3	585.5	581.9	577.9	575.3
130°	613.0	624.9	623.3	621.3	617.7
132.5°	655.4	664.6	665.3	660.6	658.1
135°	691.9	702.1	704.0	703.0	700.4
137.5°	732.6	740.8	742.4	741.7	737.9
140°	768.4	776.6	781.2	781.2	777.6
142.5°	805.2	813.4	816.0	817.0	813.4
145°	840.0	846.5	851.8	852.8	849.2
147.5°	871.2	879.3	883.3	884.9	881.3
150°	903.4	909.0	912.6	915.5	912.6
152.5°	931.9	937.5	942.1	945.7	942.1
155°	960.4	963.1	966.0	970.7	967.7
157.5°	985.2	987.0	988.7	995.3	990.7
160°	1007.1	1009.1	1010.0	1015.6	1011.7
162.5°	1027.4	1027.4	1028.5	1034.7	1030.1
165°	1044.9	1043.9	1043.9	1050.4	1045.9
167.5°	1060.7	1057.6	1057.6	1064.3	1059.6
170°	1072.5	1069.8	1068.8	1075.4	1069.8
172.5°	1080.6	1078.1	1077.0	1083.7	1078.1
175°	1087.3	1084.6	1082.6	1089.2	1083.7
177.5°	1090.9	1088.2	1086.2	1091.8	1086.2
180°	1089.2	1089.2	1089.2	1089.2	1089.2

TEST NUMBER: P918964

CATALOG NUMBER: DFN2DIP-HX3F0-060D040US935-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.05	11.97	11.94	12.86	14.00	7.03	7.94	7.91	8.84	9.98
	3H	12.73	13.55	13.63	14.45	15.62	8.22	9.04	9.12	9.94	11.11
	4H	13.34	14.11	14.25	15.02	16.19	8.67	9.44	9.58	10.35	11.53
	6H	13.76	14.47	14.68	15.38	16.57	8.99	9.70	9.92	10.62	11.81
	8H	13.88	14.56	14.81	15.49	16.68	9.08	9.76	10.01	10.69	11.88
	12H	13.94	14.58	14.88	15.51	16.72	9.13	9.77	10.06	10.70	11.91
4H	2H	11.08	11.85	12.00	12.76	13.94	7.63	8.40	8.55	9.31	10.49
	3H	12.91	13.55	13.84	14.49	15.68	8.98	9.62	9.91	10.57	11.76
	4H	13.60	14.18	14.54	15.12	16.33	9.53	10.11	10.47	11.05	12.27
	6H	14.11	14.61	15.06	15.57	16.79	9.95	10.45	10.90	11.41	12.63
	8H	14.28	14.75	15.24	15.71	16.94	10.08	10.55	11.03	11.50	12.73
	12H	14.38	14.80	15.35	15.77	17.01	10.14	10.57	11.11	11.54	12.77
8H	4H	13.57	14.04	14.52	15.00	16.22	9.81	10.28	10.76	11.24	12.47
	6H	14.13	14.52	15.11	15.52	16.74	10.33	10.71	11.31	11.71	12.94
	8H	14.34	14.68	15.33	15.67	16.92	10.52	10.86	11.50	11.84	13.09
	12H	14.48	14.78	15.47	15.76	17.05	10.63	10.93	11.62	11.92	13.21
12H	4H	13.53	13.95	14.50	14.92	16.16	9.82	10.24	10.79	11.22	12.45
	6H	14.11	14.45	15.09	15.44	16.68	10.38	10.72	11.36	11.70	12.95
	8H	14.33	14.63	15.31	15.61	16.90	10.58	10.89	11.57	11.87	13.16