

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921614

Luminaire Tested: DFN2DIP-HX3F0-030D030US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921614
REPORT IS A COMBINATION OF REPORTS P899201 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-030D030US940-FLLFL
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5015.9 lumens
Efficiency: N/A
Efficacy: 107.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 46.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921614

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-FLLFLL

Luminous Intensity Polar Plot

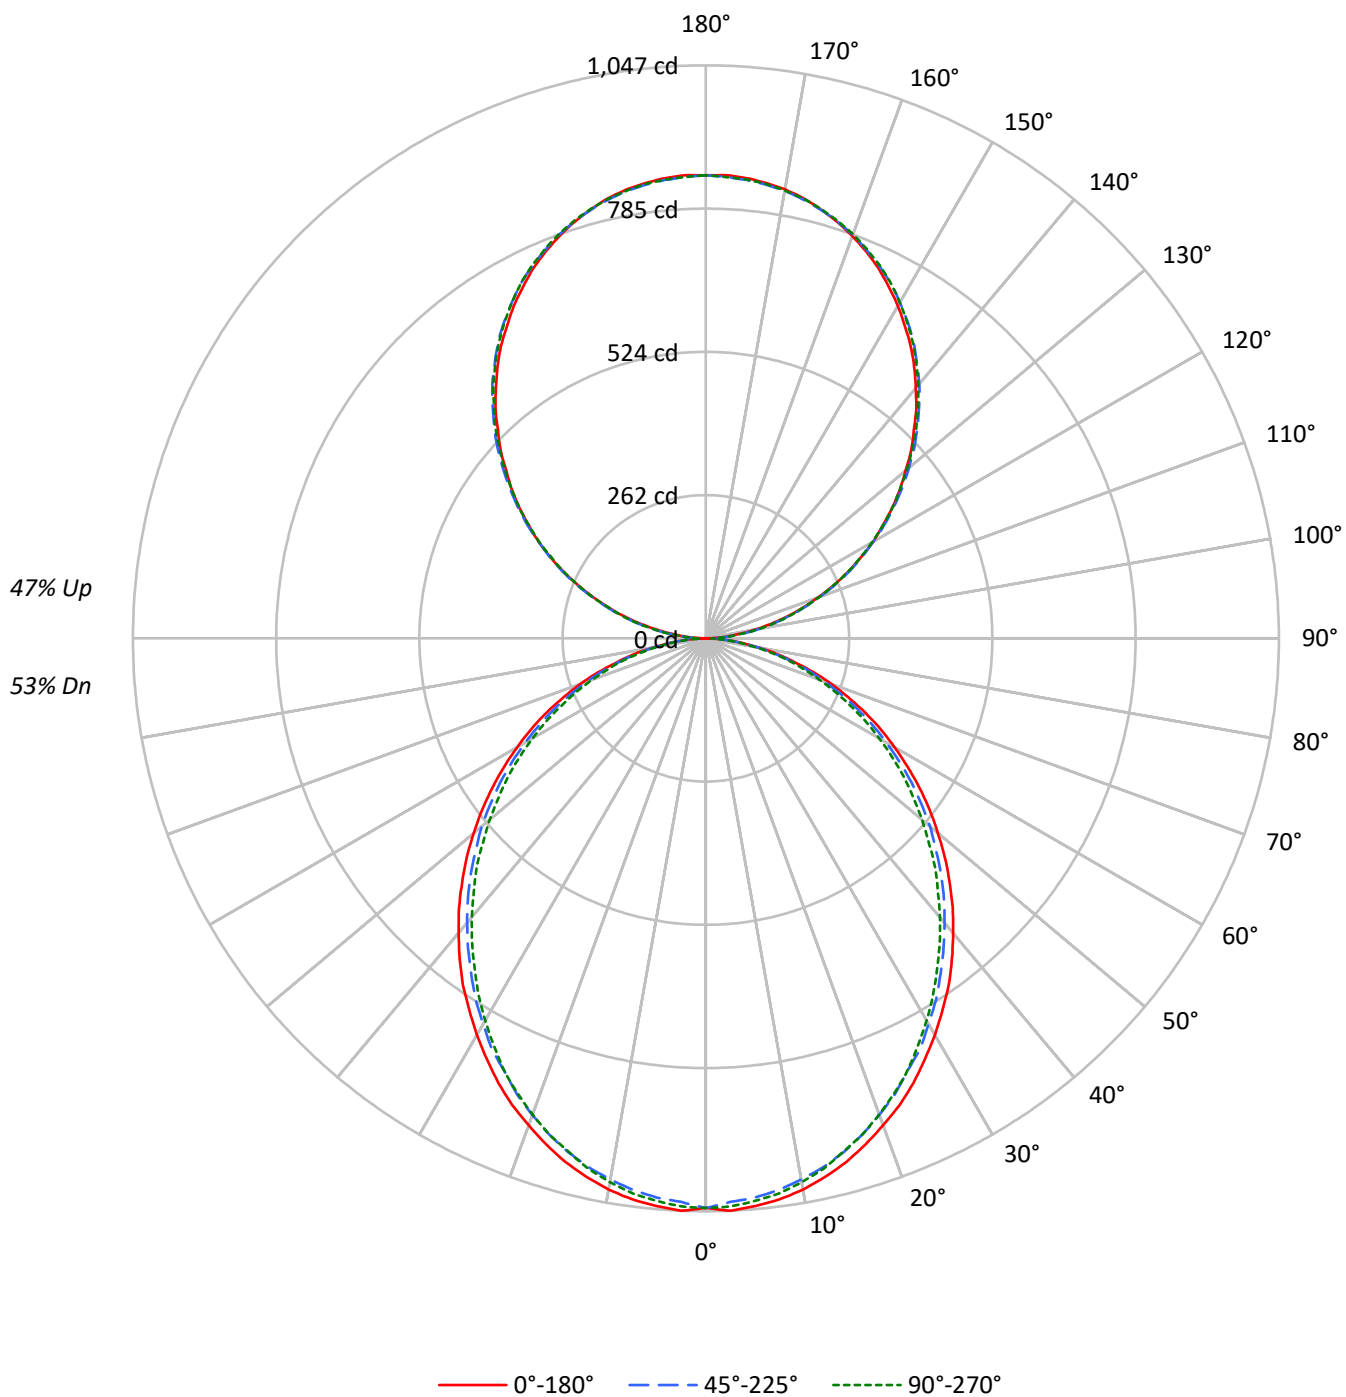

TEST NUMBER: P921614

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1206	1206	1206
5°	1207	1188	1196
10°	1197	1171	1179
15°	1179	1151	1153
20°	1154	1123	1127
25°	1130	1091	1096
30°	1100	1060	1057
35°	1071	1024	1017
40°	1036	988	978
45°	1001	951	938
50°	962	913	892
55°	922	868	849
60°	876	816	800
65°	827	761	742
70°	763	694	680
75°	675	614	622
80°	569	512	512
85°	404	339	332

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1001 cd/sqm

TEST NUMBER: P921614

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.0	2.0
10°-20°	275.6	5.5
20°-30°	405.1	8.1
30°-40°	470.5	9.4
40°-50°	469.9	9.4
50°-60°	409.8	8.2
60°-70°	302.9	6.0
70°-80°	171.4	3.4
80°-90°	47.6	0.9
90°-100°	52.3	1.0
100°-110°	166.3	3.3
110°-120°	284.7	5.7
120°-130°	374.4	7.5
130°-140°	420.2	8.4
140°-150°	412.1	8.2
150°-160°	345.7	6.9
160°-170°	229.2	4.6
170°-180°	80.1	1.6
0°-30°	778.7	15.5
0°-40°	1249.2	24.9
0°-60°	2128.9	42.4
0°-90°	2650.8	52.8
90°-120°	503.4	10.0
90°-150°	1710.0	34.1
90°-180°	2365.0	47.2
0°-180°	5015.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1041	1041	1041	1041	1041	
5°	1041	1037	1026	1034	1032	99
15°	991	985	972	976	971	279
25°	897	889	872	874	872	413
35°	774	764	748	742	737	483
45°	630	623	608	597	592	486
55°	476	470	458	446	442	426
65°	321	315	305	296	291	318
75°	168	166	161	155	157	179
85°	41	40	39	36	35	46
90°	1	9	25	24	24	5
95°	37	44	46	46	44	41
105°	154	156	157	158	158	162
115°	286	290	288	288	286	283
125°	416	422	420	418	417	371
135°	537	545	547	546	544	415
145°	652	658	662	662	660	408
155°	746	748	750	754	752	343
165°	812	811	811	816	812	229
175°	844	842	841	846	842	80
180°	846	846	846	846	846	

TEST NUMBER: P921614

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1040.9	1040.9	1040.9	1040.9	1040.9
2.5°	1047.0	1042.0	1030.9	1040.9	1039.0
5°	1040.9	1037.0	1025.9	1033.9	1032.0
7.5°	1033.9	1028.0	1016.9	1025.0	1023.0
10°	1023.0	1015.9	1004.0	1011.9	1009.0
12.5°	1007.9	1001.9	990.0	994.9	992.9
15°	990.9	985.0	971.9	975.9	970.9
17.5°	969.8	963.9	950.8	955.8	950.8
20°	946.8	940.8	926.8	929.8	925.9
22.5°	923.9	914.9	901.8	901.8	899.7
25°	896.8	888.9	871.8	873.8	871.8
27.5°	866.7	859.7	846.8	843.8	838.8
30°	836.8	828.8	813.8	810.7	806.7
32.5°	804.8	798.8	782.7	776.7	772.7
35°	773.7	763.7	747.7	741.6	736.6
37.5°	738.7	729.7	713.6	706.6	701.6
40°	702.7	694.6	678.6	669.7	665.7
42.5°	667.6	659.6	643.6	633.6	627.6
45°	629.6	622.6	607.5	596.6	592.5
47.5°	592.5	585.6	569.5	558.5	552.5
50°	553.5	548.5	534.5	520.5	515.5
52.5°	515.5	508.5	495.5	484.5	477.4
55°	476.5	470.5	458.4	446.5	441.5
57.5°	437.4	432.4	419.4	407.3	403.3
60°	398.3	394.4	380.4	369.3	366.4
62.5°	360.3	353.3	343.3	333.3	329.3
65°	321.4	315.3	305.3	296.3	291.3
67.5°	281.3	276.3	267.2	260.3	256.3
70°	244.2	240.2	231.2	224.2	220.3
72.5°	206.3	202.2	197.2	190.2	187.3
75°	168.1	166.2	161.1	155.2	157.2
77.5°	134.1	130.1	128.0	125.1	122.2
80°	100.1	99.1	97.0	94.1	92.1
82.5°	68.0	68.0	67.1	63.0	63.0
85°	41.0	40.0	39.1	36.0	35.0
87.5°	18.0	16.1	14.0	11.1	10.0
90°	0.8	9.2	25.0	23.5	24.3
92.5°	15.8	21.4	22.2	22.9	22.9
95°	37.3	44.4	45.7	45.7	44.4
97.5°	62.0	68.6	71.4	71.4	71.4
100°	90.5	96.4	98.4	98.4	97.7
102.5°	120.6	125.0	127.8	128.6	127.8
105°	153.6	155.6	157.1	158.4	158.4
107.5°	186.2	189.2	189.2	189.8	186.2
110°	217.8	221.9	221.9	221.9	219.9

TEST NUMBER: P921614

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	252.0	256.4	255.6	253.5	252.0
115°	285.7	289.7	288.5	287.8	285.7
117.5°	319.1	324.7	321.1	319.1	317.0
120°	352.8	358.4	352.8	352.8	350.4
122.5°	383.3	390.5	386.9	384.9	383.3
125°	415.5	421.9	419.8	417.5	416.8
127.5°	446.8	454.8	452.0	448.9	446.8
130°	476.2	485.4	484.1	482.6	479.7
132.5°	509.1	516.2	516.7	513.2	511.1
135°	537.4	545.3	546.9	546.1	544.0
137.5°	569.0	575.4	576.7	576.2	573.1
140°	596.8	603.2	606.8	606.8	604.0
142.5°	625.4	631.8	633.8	634.6	631.8
145°	652.5	657.5	661.6	662.4	659.6
147.5°	676.7	683.1	686.1	687.4	684.6
150°	701.7	706.1	708.8	711.1	708.8
152.5°	723.9	728.2	731.7	734.6	731.7
155°	746.1	748.1	750.4	753.9	751.7
157.5°	765.2	766.7	768.0	773.1	769.5
160°	782.3	783.8	784.6	788.9	785.9
162.5°	798.1	798.1	798.9	803.7	800.1
165°	811.6	810.8	810.8	815.9	812.3
167.5°	823.9	821.5	821.5	826.6	823.0
170°	833.0	831.0	830.3	835.4	831.0
172.5°	839.4	837.4	836.6	841.7	837.4
175°	844.5	842.5	841.0	846.1	841.7
177.5°	847.3	845.3	843.7	848.1	843.7
180°	846.1	846.1	846.1	846.1	846.1

TEST NUMBER: P921614

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.14	9.02	9.07	9.97	11.20	7.71	8.59	8.64	9.54	10.77
	3H	9.79	10.59	10.74	11.55	12.80	9.32	10.12	10.27	11.08	12.33
	4H	10.37	11.13	11.33	12.09	13.35	9.91	10.66	10.86	11.62	12.89
	6H	10.77	11.46	11.74	12.43	13.71	10.30	10.99	11.27	11.96	13.24
	8H	10.87	11.53	11.85	12.52	13.79	10.40	11.06	11.38	12.05	13.32
	12H	10.92	11.55	11.90	12.53	13.82	10.44	11.07	11.43	12.05	13.35
4H	2H	8.60	9.35	9.56	10.32	11.58	8.26	9.01	9.22	9.97	11.23
	3H	10.46	11.09	11.43	12.08	13.36	10.07	10.70	11.04	11.69	12.97
	4H	11.17	11.74	12.15	12.73	14.03	10.77	11.34	11.75	12.33	13.63
	6H	11.68	12.17	12.67	13.18	14.48	11.27	11.77	12.27	12.78	14.08
	8H	11.82	12.29	12.82	13.29	14.60	11.42	11.88	12.41	12.88	14.20
	12H	11.89	12.31	12.91	13.33	14.65	11.48	11.90	12.49	12.91	14.23
8H	4H	11.36	11.83	12.36	12.83	14.14	11.01	11.47	12.00	12.47	13.79
	6H	11.99	12.37	13.01	13.41	14.73	11.63	12.01	12.65	13.06	14.37
	8H	12.20	12.54	13.23	13.57	14.90	11.84	12.17	12.87	13.21	14.54
	12H	12.33	12.63	13.36	13.65	15.03	11.95	12.25	12.98	13.27	14.65
12H	4H	11.35	11.77	12.36	12.79	14.10	11.00	11.42	12.01	12.44	13.76
	6H	12.01	12.35	13.04	13.38	14.71	11.67	12.00	12.70	13.04	14.37
	8H	12.25	12.55	13.28	13.57	14.95	11.90	12.20	12.93	13.22	14.60