

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921617

Luminaire Tested: DFN2DIP-HX3F0-030D030US940-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921617
REPORT IS A COMBINATION OF REPORTS P900722 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-030D030US940-RLLONL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4922.3 lumens
Efficiency: N/A
Efficacy: 105.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 46.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921617

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-RLLONL

Luminous Intensity Polar Plot

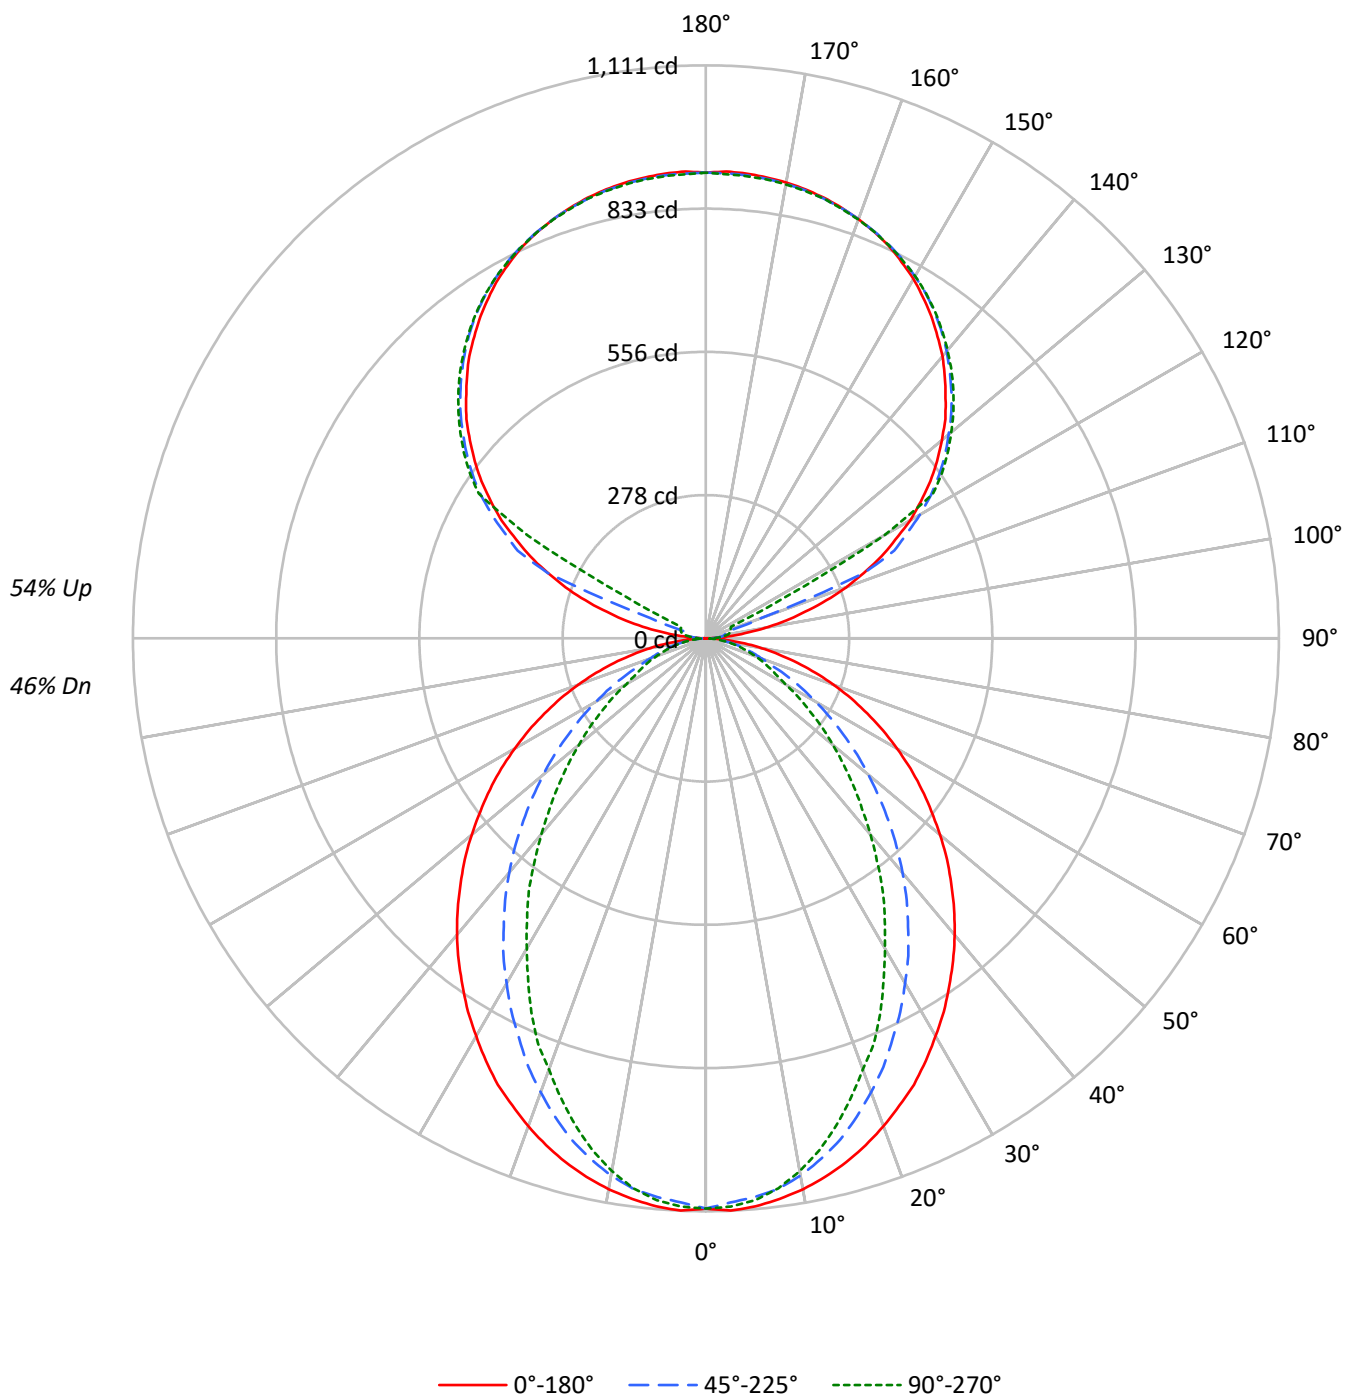

TEST NUMBER: P921617

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1281	1281	1281
5°	1282	1260	1268
10°	1269	1234	1226
15°	1251	1192	1161
20°	1227	1135	1083
25°	1203	1071	1006
30°	1171	1006	910
35°	1139	936	826
40°	1107	863	729
45°	1069	783	641
50°	1030	702	555
55°	989	616	473
60°	942	525	389
65°	888	434	349
70°	822	348	315
75°	739	305	285
80°	620	253	245
85°	424	165	180

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1069 cd/sqm

TEST NUMBER: P921617

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.6	2.1
10°-20°	284.5	5.8
20°-30°	399.4	8.1
30°-40°	435.3	8.8
40°-50°	400.1	8.1
50°-60°	314.2	6.4
60°-70°	204.5	4.2
70°-80°	105.3	2.1
80°-90°	28.5	0.6
90°-100°	29.8	0.6
100°-110°	111.0	2.3
110°-120°	294.3	6.0
120°-130°	488.2	9.9
130°-140°	518.5	10.5
140°-150°	481.9	9.8
150°-160°	387.5	7.9
160°-170°	249.7	5.1
170°-180°	85.9	1.7
0°-30°	787.5	16.0
0°-40°	1222.8	24.8
0°-60°	1937.2	39.4
0°-90°	2275.4	46.2
90°-120°	435.1	8.8
90°-150°	1923.7	39.1
90°-180°	2647.0	53.8
0°-180°	4922.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1106	1106	1106	1106	1106	
5°	1106	1101	1088	1097	1094	105
15°	1052	1040	1007	988	978	296
25°	955	922	856	816	800	439
35°	822	771	683	620	598	515
45°	672	605	500	429	405	519
55°	511	433	325	265	246	457
65°	345	264	174	140	137	342
75°	184	114	80	73	72	195
85°	43	22	19	19	19	49
90°	1	8	13	16	18	5
95°	42	21	25	29	28	50
105°	199	218	40	47	50	212
115°	376	387	403	101	54	370
125°	531	540	552	557	559	474
135°	657	668	674	680	679	508
145°	762	762	773	777	774	477
155°	840	834	841	845	840	387
165°	884	881	883	887	883	250
175°	905	900	902	906	900	86
180°	903	903	903	903	903	

TEST NUMBER: P921617

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1105.6	1105.6	1105.6	1105.6	1105.6
2.5°	1110.6	1105.6	1094.6	1104.7	1102.7
5°	1105.6	1100.6	1087.6	1096.6	1093.6
7.5°	1096.6	1090.7	1076.7	1080.6	1075.6
10°	1084.6	1077.6	1057.7	1054.5	1048.7
12.5°	1069.6	1060.6	1033.6	1027.6	1016.5
15°	1051.6	1040.5	1006.6	987.6	977.6
17.5°	1030.5	1014.6	972.5	950.6	934.5
20°	1006.6	986.5	936.5	911.6	889.5
22.5°	980.6	957.5	899.5	865.5	850.5
25°	954.6	922.5	856.5	815.5	800.4
27.5°	923.5	889.5	816.5	769.5	746.4
30°	890.6	852.5	772.4	721.5	694.4
32.5°	858.4	812.4	730.5	670.4	645.3
35°	822.5	771.4	683.4	620.4	598.3
37.5°	787.5	732.4	639.4	570.2	545.4
40°	750.5	690.5	593.3	522.3	496.3
42.5°	712.4	648.5	547.3	473.2	448.3
45°	672.4	605.3	500.3	429.2	405.2
47.5°	634.4	563.4	455.3	384.1	362.2
50°	592.4	521.3	411.3	342.1	321.2
52.5°	551.3	476.3	369.3	303.2	284.2
55°	511.2	433.2	325.1	265.2	246.2
57.5°	470.3	390.2	286.2	230.2	214.1
60°	428.2	348.2	245.1	194.1	178.2
62.5°	387.3	307.2	210.1	162.1	154.2
65°	345.2	264.1	174.1	140.1	137.1
67.5°	305.2	224.1	140.1	123.1	120.0
70°	263.1	185.1	116.0	106.0	102.0
72.5°	223.1	149.0	97.0	89.1	87.0
75°	184.0	114.0	80.1	73.0	72.1
77.5°	145.1	81.0	63.0	59.0	57.0
80°	109.1	58.1	48.0	44.1	44.1
82.5°	76.0	39.1	33.0	31.0	31.0
85°	43.0	21.9	19.0	19.0	19.0
87.5°	16.1	7.9	7.9	7.0	7.0
90°	0.6	7.8	13.0	16.4	17.6
92.5°	16.4	13.7	15.7	17.0	17.6
95°	42.4	20.9	25.4	28.8	28.1
97.5°	76.4	22.9	33.3	35.3	35.9
100°	115.7	26.1	37.3	42.4	43.8
102.5°	158.7	157.5	38.5	45.7	47.7
105°	198.6	218.2	39.9	47.0	49.7
107.5°	245.0	261.3	41.2	48.3	51.0
110°	289.4	303.1	114.3	49.0	51.6

TEST NUMBER: P921617

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	331.3	343.0	331.9	50.3	52.3
115°	375.6	386.7	403.1	100.6	53.6
117.5°	414.2	427.2	438.4	344.9	173.8
120°	457.3	467.1	478.8	486.7	398.5
122.5°	493.8	504.4	517.5	521.3	522.0
125°	531.1	539.6	552.1	556.6	558.6
127.5°	565.1	574.2	584.1	590.6	591.2
130°	597.1	607.6	614.7	621.9	621.3
132.5°	629.7	638.3	645.4	651.3	650.7
135°	657.2	667.7	673.5	680.1	678.8
137.5°	685.9	693.8	700.3	706.9	704.9
140°	714.0	719.3	726.4	732.3	729.1
142.5°	737.6	742.2	750.6	755.8	752.6
145°	762.4	761.7	772.8	777.4	774.1
147.5°	783.9	781.9	793.1	796.3	793.7
150°	804.9	800.3	810.7	814.6	811.4
152.5°	822.4	817.3	827.1	831.0	826.4
155°	839.5	833.7	841.4	845.3	840.2
157.5°	853.2	848.0	853.9	858.4	853.2
160°	865.0	861.0	865.0	868.9	864.2
162.5°	875.4	871.5	874.8	879.3	873.4
165°	884.5	880.7	882.6	887.2	882.6
167.5°	891.7	887.8	889.7	894.4	888.5
170°	897.6	893.7	895.0	899.6	893.7
172.5°	901.5	897.6	898.9	903.5	897.6
175°	904.7	900.2	901.5	906.1	899.6
177.5°	906.1	901.5	902.2	906.8	900.9
180°	902.9	902.9	902.9	902.9	902.9

TEST NUMBER: P921617

CATALOG NUMBER: DFN2DIP-HX3F0-030D030US940-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.60	8.40	8.60	9.40	10.73	3.58	4.38	4.57	5.38	6.71
	3H	9.27	9.98	10.27	10.99	12.34	4.76	5.47	5.76	6.49	7.83
	4H	9.87	10.55	10.89	11.56	12.92	5.20	5.88	6.22	6.90	8.25
	6H	10.28	10.91	11.31	11.92	13.29	5.52	6.14	6.55	7.16	8.53
	8H	10.40	11.00	11.44	12.03	13.40	5.61	6.20	6.64	7.24	8.60
	12H	10.46	11.03	11.50	12.05	13.44	5.65	6.21	6.69	7.24	8.63
4H	2H	7.61	8.29	8.64	9.30	10.66	4.16	4.84	5.19	5.86	7.21
	3H	9.43	9.99	10.46	11.04	12.41	5.51	6.07	6.54	7.11	8.48
	4H	10.12	10.63	11.16	11.67	13.06	6.05	6.56	7.09	7.60	8.99
	6H	10.62	11.06	11.67	12.12	13.51	6.46	6.90	7.51	7.96	9.35
	8H	10.79	11.20	11.84	12.26	13.66	6.59	7.00	7.64	8.05	9.45
	12H	10.88	11.25	11.95	12.32	13.73	6.65	7.02	7.72	8.09	9.49
8H	4H	10.08	10.49	11.13	11.54	12.95	6.32	6.73	7.37	7.79	9.19
	6H	10.64	10.98	11.71	12.07	13.47	6.83	7.17	7.91	8.27	9.67
	8H	10.85	11.15	11.93	12.22	13.64	7.02	7.32	8.10	8.40	9.82
	12H	10.98	11.24	12.06	12.31	13.77	7.13	7.40	8.22	8.47	9.93
12H	4H	10.03	10.40	11.10	11.47	12.88	6.32	6.70	7.39	7.76	9.17
	6H	10.61	10.91	11.69	11.99	13.41	6.88	7.18	7.96	8.26	9.68
	8H	10.83	11.09	11.91	12.16	13.62	7.09	7.35	8.17	8.42	9.88