

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921707

Luminaire Tested: DFN2DIP-HX3F0-060D080US940-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P921707  
REPORT IS A COMBINATION OF REPORTS P899278 AND P896089  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-HX3F0-060D080US940-RLLFLL  
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 10861.0 lumens  
Efficiency: N/A  
Efficacy: 92.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 118  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9933  
Total Harmonic Distortion (THDi): 0.066  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P921707  
CATALOG NUMBER: DFN2DIP-HX3F0-060D080US940-RLFL

### Luminous Intensity Polar Plot

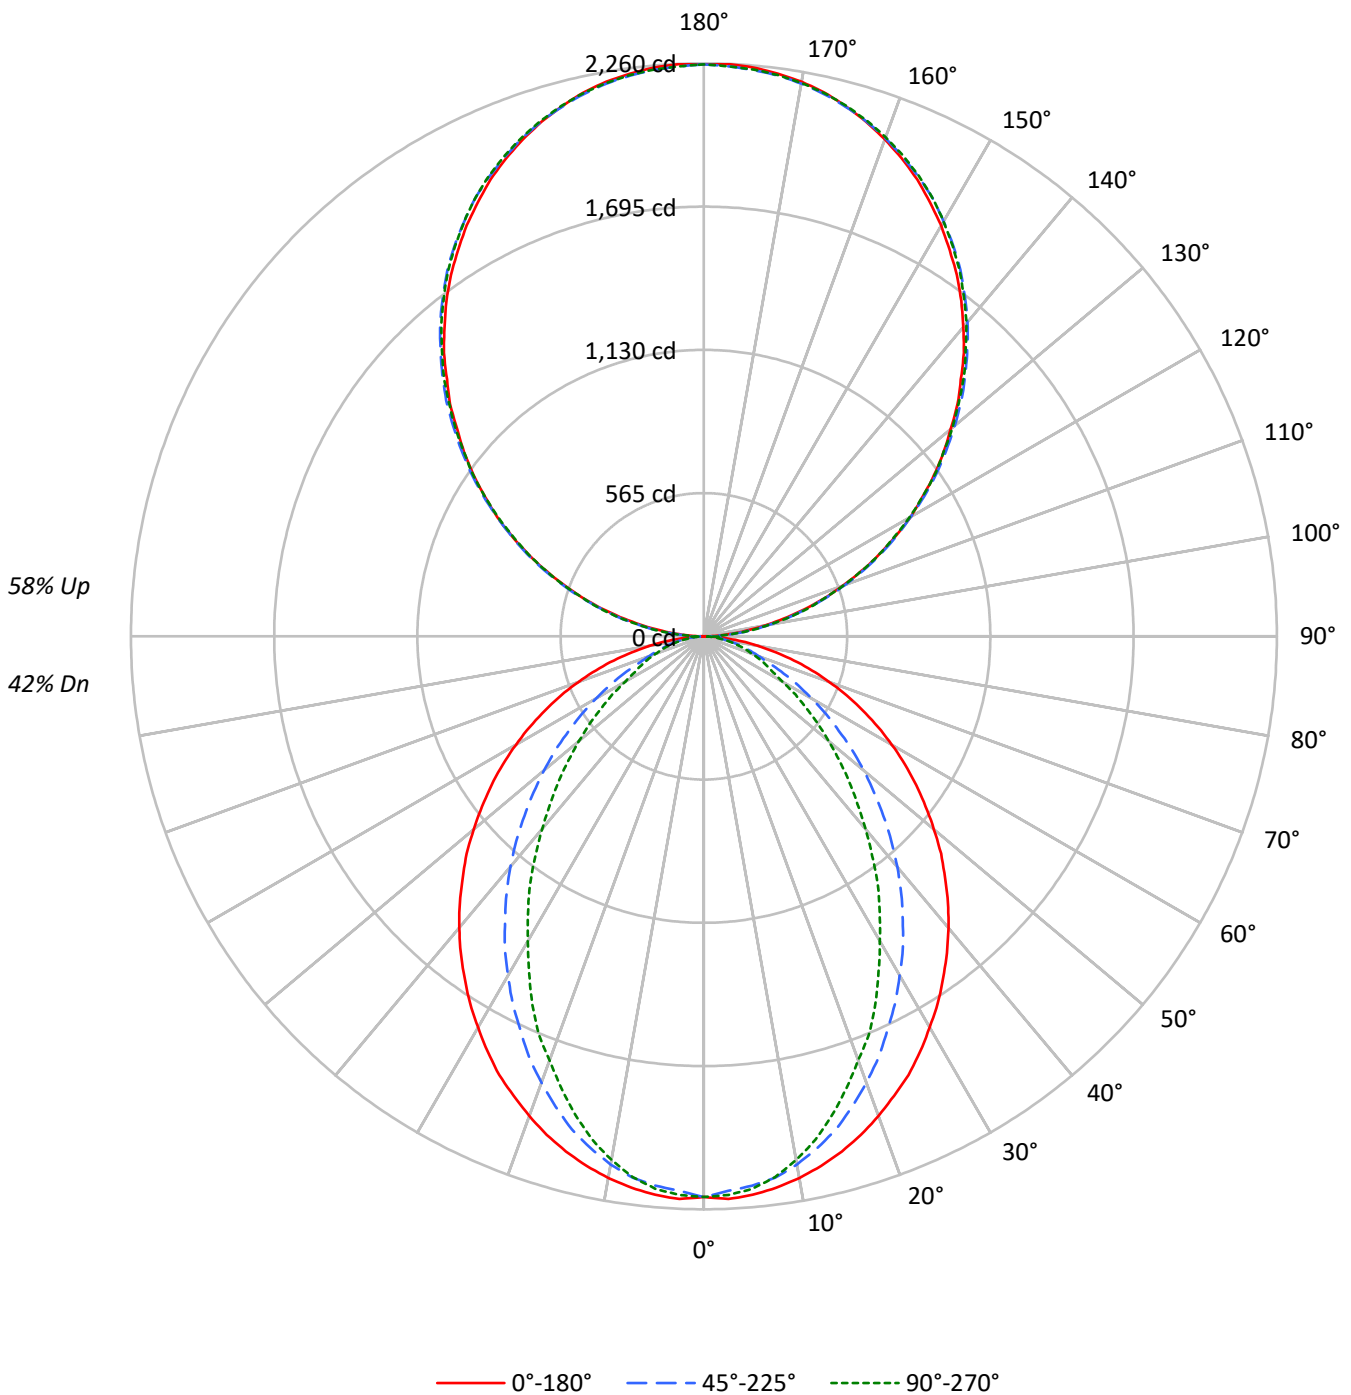



TEST NUMBER: P921707

CATALOG NUMBER: DFN2DIP-HX3F0-060D080US940-RLFL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	49	49	49	42
1	96	92	89	85	88	84	81	78	70	67	65	56	55	53	44	43	42	42	42	42	36
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36	36	36	36	31
3	81	72	65	59	73	66	60	55	55	50	47	44	41	39	35	33	31	31	31	31	27
4	74	64	56	50	67	58	52	47	49	44	40	40	36	33	31	29	27	27	27	27	23
5	68	57	49	43	62	52	45	40	44	39	35	36	32	29	28	26	24	24	24	24	20
6	63	51	43	38	57	47	40	35	40	34	30	33	29	26	26	23	21	21	21	21	18
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	24	21	19	19	19	19	16
8	54	42	34	29	49	39	32	28	33	28	24	27	23	21	22	19	17	17	17	17	15
9	50	38	31	26	46	36	29	25	30	25	22	25	21	19	20	18	16	16	16	16	13
10	47	35	28	24	43	33	26	22	28	23	19	23	19	17	19	16	14	14	14	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2561	2561	2561
5°	2564	2519	2536
10°	2538	2468	2452
15°	2502	2384	2323
20°	2454	2270	2165
25°	2406	2143	2013
30°	2341	2012	1820
35°	2277	1872	1651
40°	2213	1727	1458
45°	2138	1566	1282
50°	2060	1404	1111
55°	1979	1231	947
60°	1885	1051	778
65°	1776	868	698
70°	1645	697	630
75°	1479	611	570
80°	1240	506	490
85°	847	330	360

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2138 cd/sqm



TEST NUMBER: P921707

CATALOG NUMBER: DFN2DIP-HX3F0-060D080US940-RLFL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	207.2	1.9
10°-20°	568.9	5.2
20°-30°	798.7	7.4
30°-40°	870.7	8.0
40°-50°	800.3	7.4
50°-60°	628.5	5.8
60°-70°	409.1	3.8
70°-80°	210.6	1.9
80°-90°	60.2	0.6
90°-100°	139.6	1.3
100°-110°	443.6	4.1
110°-120°	759.1	7.0
120°-130°	998.3	9.2
130°-140°	1120.6	10.3
140°-150°	1098.9	10.1
150°-160°	921.8	8.5
160°-170°	611.3	5.6
170°-180°	213.7	2.0
0°-30°	1574.9	14.5
0°-40°	2445.6	22.5
0°-60°	3874.3	35.7
0°-90°	4554.1	41.9
90°-120°	1342.3	12.4
90°-150°	4560.1	42.0
90°-180°	6307.0	58.1
0°-180°	10861.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2211	2211	2211	2211	2211	
5°	2211	2201	2175	2193	2187	210
15°	2103	2081	2013	1975	1955	593
25°	1909	1845	1713	1631	1601	878
35°	1645	1543	1367	1241	1197	1030
45°	1345	1211	1001	858	810	1039
55°	1022	866	650	530	492	914
65°	690	528	348	280	274	685
75°	368	228	160	146	144	389
85°	86	44	38	38	38	99
90°	2	24	67	63	65	11
95°	99	118	122	122	118	111
105°	410	415	419	422	422	432
115°	762	773	769	767	762	753
125°	1108	1125	1120	1113	1111	990
135°	1433	1454	1458	1456	1451	1108
145°	1740	1754	1764	1766	1759	1087
155°	1990	1995	2001	2010	2004	916
165°	2164	2162	2162	2176	2166	611
175°	2252	2247	2242	2256	2244	214
180°	2256	2256	2256	2256	2256	



TEST NUMBER: P921707

CATALOG NUMBER: DFN2DIP-HX3F0-060D080US940-RLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2211.3	2211.3	2211.3	2211.3	2211.3
2.5°	2221.3	2211.3	2189.1	2209.3	2205.3
5°	2211.3	2201.3	2175.1	2193.3	2187.3
7.5°	2193.3	2181.3	2153.3	2161.1	2151.2
10°	2169.2	2155.2	2115.3	2109.2	2097.2
12.5°	2139.3	2121.2	2067.1	2055.2	2033.1
15°	2103.2	2081.1	2013.1	1975.1	1955.2
17.5°	2061.2	2029.1	1945.0	1901.0	1869.0
20°	2013.1	1973.0	1873.0	1823.1	1779.0
22.5°	1961.1	1915.0	1798.9	1731.0	1701.0
25°	1909.2	1845.0	1713.0	1631.0	1600.9
27.5°	1847.2	1779.0	1632.9	1538.8	1492.8
30°	1781.1	1704.9	1544.8	1442.9	1388.7
32.5°	1717.0	1624.9	1461.0	1340.8	1290.7
35°	1645.0	1542.9	1366.9	1240.7	1196.6
37.5°	1574.9	1464.7	1278.8	1140.6	1090.7
40°	1500.8	1380.9	1186.6	1044.5	992.6
42.5°	1424.9	1296.8	1094.7	946.5	896.6
45°	1344.8	1210.6	1000.7	858.4	810.4
47.5°	1268.8	1126.8	910.6	768.4	724.4
50°	1184.7	1042.7	822.5	684.3	642.5
52.5°	1102.5	952.4	738.4	606.4	568.4
55°	1022.5	866.5	650.3	530.4	492.3
57.5°	940.6	780.4	572.4	460.3	428.2
60°	856.5	696.4	490.3	388.3	356.2
62.5°	774.5	614.5	420.2	324.2	308.3
65°	690.5	528.2	348.2	280.3	274.1
67.5°	610.4	448.2	280.3	246.1	240.1
70°	526.3	370.2	232.0	212.1	204.0
72.5°	446.3	298.1	194.0	178.2	174.1
75°	368.2	228.0	160.1	146.1	144.2
77.5°	290.3	162.0	126.1	118.1	114.0
80°	218.0	116.1	95.9	88.1	88.1
82.5°	152.0	78.1	66.0	62.0	62.0
85°	86.0	44.0	38.0	38.0	38.0
87.5°	32.1	16.0	16.0	14.0	14.0
90°	2.1	24.5	66.7	62.6	64.6
92.5°	42.2	57.2	59.2	61.2	61.2
95°	99.3	118.3	121.7	121.7	118.3
97.5°	165.3	183.0	190.5	190.5	190.5
100°	241.5	257.1	262.5	262.5	260.5
102.5°	321.7	333.3	340.7	342.8	340.7
105°	409.5	414.9	419.0	422.4	422.4
107.5°	496.5	504.7	504.7	506.0	496.5
110°	580.9	591.7	591.7	591.7	586.3



TEST NUMBER: P921707

CATALOG NUMBER: DFN2DIP-HX3F0-060D080US940-RLFL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	672.0	683.6	681.5	676.1	672.0
115°	761.8	772.7	769.3	767.2	761.8
117.5°	850.9	865.9	856.3	850.9	845.4
120°	940.7	955.6	940.7	940.7	934.5
122.5°	1022.3	1041.3	1031.8	1026.4	1022.3
125°	1108.0	1125.0	1119.5	1113.4	1111.4
127.5°	1191.7	1212.7	1205.2	1197.1	1191.7
130°	1269.9	1294.3	1290.9	1286.9	1279.4
132.5°	1357.6	1376.6	1378.0	1368.5	1363.1
135°	1433.1	1454.2	1458.3	1456.3	1450.8
137.5°	1517.4	1534.5	1537.8	1536.5	1528.3
140°	1591.6	1608.6	1618.1	1618.1	1610.6
142.5°	1667.8	1684.8	1690.2	1692.3	1684.8
145°	1739.9	1753.5	1764.3	1766.4	1758.9
147.5°	1804.5	1821.5	1829.6	1833.1	1825.6
150°	1871.2	1882.7	1890.2	1896.3	1890.2
152.5°	1930.3	1941.9	1951.4	1958.9	1951.4
155°	1989.5	1994.9	2001.1	2010.5	2004.5
157.5°	2040.5	2044.6	2048.0	2061.5	2052.1
160°	2086.1	2090.2	2092.2	2103.7	2095.6
162.5°	2128.2	2128.2	2130.3	2143.2	2133.7
165°	2164.3	2162.2	2162.2	2175.9	2166.3
167.5°	2196.9	2190.8	2190.8	2204.4	2194.9
170°	2221.4	2216.0	2213.9	2227.6	2216.0
172.5°	2238.5	2233.0	2231.0	2244.5	2233.0
175°	2252.0	2246.6	2242.5	2256.1	2244.5
177.5°	2259.5	2254.1	2250.0	2261.6	2250.0
180°	2256.1	2256.1	2256.1	2256.1	2256.1



TEST NUMBER: P921707  
 CATALOG NUMBER: DFN2DIP-HX3F0-060D080US940-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.57	10.33	10.60	11.37	12.75	5.54	6.31	6.57	7.34	8.73
	3H	11.23	11.92	12.27	12.96	14.36	6.72	7.41	7.76	8.45	9.86
	4H	11.83	12.48	12.88	13.53	14.94	7.17	7.82	8.22	8.86	10.27
	6H	12.24	12.84	13.31	13.89	15.31	7.48	8.08	8.54	9.13	10.55
	8H	12.37	12.93	13.43	14.00	15.42	7.57	8.14	8.63	9.20	10.62
	12H	12.42	12.96	13.49	14.02	15.46	7.61	8.15	8.68	9.21	10.65
4H	2H	9.58	10.23	10.63	11.27	12.68	6.13	6.78	7.18	7.82	9.23
	3H	11.39	11.93	12.46	13.00	14.43	7.47	8.01	8.53	9.08	10.50
	4H	12.07	12.57	13.15	13.63	15.08	8.01	8.50	9.08	9.57	11.01
	6H	12.58	13.00	13.66	14.09	15.53	8.42	8.84	9.50	9.93	11.37
	8H	12.75	13.14	13.83	14.22	15.68	8.54	8.94	9.62	10.02	11.47
	12H	12.84	13.19	13.93	14.29	15.75	8.60	8.96	9.70	10.05	11.51
8H	4H	12.04	12.43	13.12	13.51	14.97	8.28	8.67	9.36	9.75	11.21
	6H	12.59	12.92	13.69	14.04	15.49	8.79	9.12	9.89	10.24	11.69
	8H	12.80	13.09	13.91	14.19	15.67	8.98	9.26	10.08	10.36	11.84
	12H	12.93	13.19	14.05	14.28	15.80	9.09	9.34	10.20	10.44	11.95
12H	4H	11.99	12.34	13.08	13.44	14.90	8.28	8.64	9.38	9.73	11.19
	6H	12.57	12.85	13.68	13.96	15.43	8.83	9.12	9.94	10.22	11.70
	8H	12.78	13.03	13.89	14.13	15.64	9.04	9.29	10.15	10.39	11.90