

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921732

Luminaire Tested: DFN2DIP-HX3F0-070D090US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921732
REPORT IS A COMBINATION OF REPORTS P899293 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-070D090US940-FLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13282.1 lumens
Efficiency: N/A
Efficacy: 94.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 140.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921732

CATALOG NUMBER: DFN2DIP-HX3F0-070D090US940-FLLFLL

Luminous Intensity Polar Plot

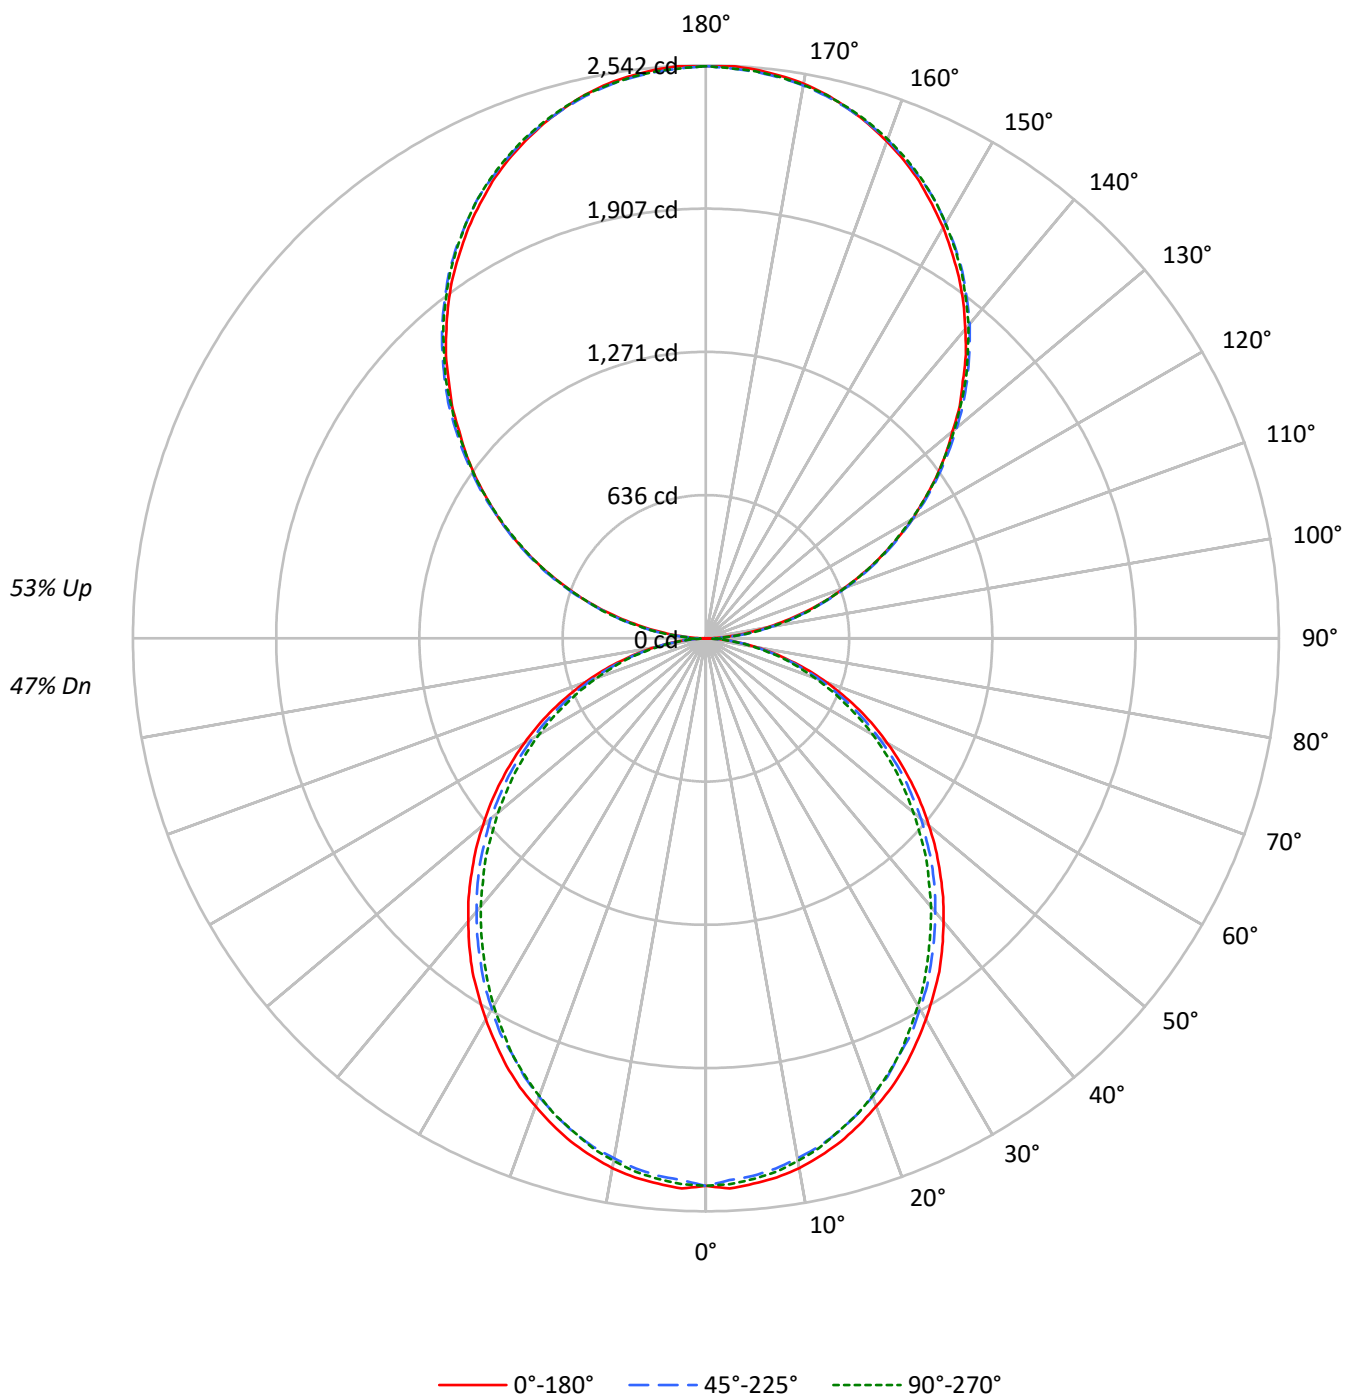

TEST NUMBER: P921732

CATALOG NUMBER: DFN2DIP-HX3F0-070D090US940-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	67	67	67	53	53	53
1	97	93	89	85	89	85	82	79	71	69	67	59	57	55	47	46	45
2	88	81	75	70	81	75	69	65	63	59	55	51	49	46	41	39	38
3	81	71	64	58	74	66	59	54	55	50	47	45	42	39	37	34	32
4	74	63	55	49	67	58	51	46	49	44	40	41	37	34	33	30	28
5	68	56	48	42	62	52	45	39	44	38	34	36	32	29	29	26	24
6	62	50	42	36	57	47	39	34	39	34	30	33	29	25	27	24	21
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	24	21	19
8	53	41	33	28	49	38	31	27	33	27	23	27	23	20	22	19	17
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15
10	46	34	27	22	43	32	26	21	28	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2813	2813	2813
5°	2817	2772	2791
10°	2792	2733	2752
15°	2750	2686	2691
20°	2693	2622	2629
25°	2637	2545	2558
30°	2566	2473	2468
35°	2500	2389	2372
40°	2417	2304	2281
45°	2335	2219	2188
50°	2246	2129	2080
55°	2152	2026	1980
60°	2045	1903	1867
65°	1929	1776	1732
70°	1781	1620	1587
75°	1576	1434	1451
80°	1328	1196	1194
85°	943	791	775

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2389 cd/sqm

TEST NUMBER: P921732

CATALOG NUMBER: DFN2DIP-HX3F0-070D090US940-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	228.6	1.7
10°-20°	643.2	4.8
20°-30°	945.2	7.1
30°-40°	1097.8	8.3
40°-50°	1096.5	8.3
50°-60°	956.1	7.2
60°-70°	706.8	5.3
70°-80°	399.9	3.0
80°-90°	112.8	0.8
90°-100°	157.1	1.2
100°-110°	499.0	3.8
110°-120°	854.0	6.4
120°-130°	1123.1	8.5
130°-140°	1260.7	9.5
140°-150°	1236.2	9.3
150°-160°	1037.0	7.8
160°-170°	687.7	5.2
170°-180°	240.4	1.8
0°-30°	1817.0	13.7
0°-40°	2914.9	21.9
0°-60°	4967.4	37.4
0°-90°	6186.8	46.6
90°-120°	1510.1	11.4
90°-150°	5130.1	38.6
90°-180°	7095.0	53.4
0°-180°	13282.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2429	2429	2429	2429	2429	
5°	2429	2420	2394	2412	2408	231
15°	2312	2298	2268	2277	2266	651
25°	2093	2074	2034	2039	2034	963
35°	1805	1782	1745	1730	1719	1127
45°	1469	1453	1418	1392	1383	1134
55°	1112	1098	1070	1042	1030	994
65°	750	736	712	691	680	741
75°	392	388	376	362	367	419
85°	96	94	91	84	82	107
90°	2	28	75	70	73	13
95°	112	133	137	137	133	124
105°	461	467	471	475	475	486
115°	857	869	865	863	857	848
125°	1246	1266	1260	1253	1250	1114
135°	1612	1636	1641	1638	1632	1246
145°	1957	1973	1985	1987	1979	1223
155°	2238	2244	2251	2262	2255	1030
165°	2435	2432	2432	2448	2437	687
175°	2534	2527	2523	2538	2525	241
180°	2538	2538	2538	2538	2538	

TEST NUMBER: P921732

CATALOG NUMBER: DFN2DIP-HX3F0-070D090US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2428.8	2428.8	2428.8	2428.8	2428.8
2.5°	2442.9	2431.2	2405.5	2428.8	2424.3
5°	2428.8	2419.7	2393.9	2412.4	2408.0
7.5°	2412.4	2398.5	2372.8	2391.7	2386.9
10°	2386.9	2370.5	2342.5	2361.2	2354.2
12.5°	2351.7	2337.9	2309.9	2321.5	2316.8
15°	2312.1	2298.2	2267.7	2277.2	2265.5
17.5°	2263.0	2249.2	2218.7	2230.3	2218.7
20°	2209.2	2195.4	2162.7	2169.6	2160.4
22.5°	2155.7	2134.7	2104.2	2104.2	2099.4
25°	2092.6	2073.9	2034.3	2038.8	2034.3
27.5°	2022.4	2006.1	1975.9	1968.9	1957.2
30°	1952.6	1933.7	1898.8	1891.9	1882.4
32.5°	1877.7	1863.9	1826.4	1812.3	1802.9
35°	1805.4	1782.1	1744.6	1730.5	1718.9
37.5°	1723.6	1702.5	1665.1	1648.8	1637.1
40°	1639.6	1620.8	1583.3	1562.5	1553.1
42.5°	1557.8	1539.0	1501.8	1478.3	1464.4
45°	1469.1	1452.8	1417.6	1392.0	1382.6
47.5°	1382.6	1366.3	1328.8	1303.1	1289.2
50°	1291.5	1279.8	1247.1	1214.4	1202.7
52.5°	1202.7	1186.4	1156.2	1130.4	1114.0
55°	1111.8	1097.7	1069.7	1041.7	1030.0
57.5°	1020.7	1009.0	978.5	950.5	941.1
60°	929.4	920.2	887.6	861.8	854.9
62.5°	840.7	824.4	801.1	777.8	768.4
65°	749.8	735.7	712.4	691.3	679.7
67.5°	656.4	644.5	623.7	607.3	597.9
70°	569.9	560.5	539.4	523.1	513.9
72.5°	481.2	471.8	460.1	443.8	436.8
75°	392.3	387.8	375.9	362.0	366.8
77.5°	313.0	303.5	298.8	291.9	285.0
80°	233.6	231.2	226.5	219.5	214.8
82.5°	158.8	158.8	156.6	147.2	147.2
85°	95.7	93.5	91.2	84.0	81.8
87.5°	42.1	37.5	32.7	25.8	23.3
90°	2.3	27.6	75.0	70.4	72.7
92.5°	47.4	64.3	66.6	68.8	68.8
95°	111.7	133.1	137.0	137.0	133.1
97.5°	185.9	205.8	214.3	214.3	214.3
100°	271.6	289.3	295.3	295.3	293.1
102.5°	361.9	375.0	383.3	385.7	383.3
105°	460.7	466.7	471.4	475.2	475.2
107.5°	558.6	567.8	567.8	569.3	558.6
110°	653.4	665.8	665.8	665.8	659.6

TEST NUMBER: P921732

CATALOG NUMBER: DFN2DIP-HX3F0-070D090US940-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	756.0	769.0	766.7	760.6	756.0
115°	857.0	869.2	865.4	863.2	857.0
117.5°	957.3	974.1	963.4	957.3	951.1
120°	1058.3	1075.0	1058.3	1058.3	1051.3
122.5°	1150.0	1171.5	1160.8	1154.7	1150.0
125°	1246.5	1265.6	1259.5	1252.6	1250.4
127.5°	1340.6	1364.3	1355.9	1346.8	1340.6
130°	1428.6	1456.2	1452.3	1447.7	1439.3
132.5°	1527.3	1548.7	1550.2	1539.5	1533.5
135°	1612.2	1635.9	1640.6	1638.3	1632.2
137.5°	1707.1	1726.3	1730.1	1728.6	1719.4
140°	1790.6	1809.6	1820.3	1820.3	1812.0
142.5°	1876.2	1895.3	1901.5	1903.8	1895.3
145°	1957.4	1972.6	1984.9	1987.2	1978.8
147.5°	2030.1	2049.2	2058.3	2062.2	2053.8
150°	2105.1	2118.1	2126.5	2133.3	2126.5
152.5°	2171.6	2184.6	2195.3	2203.8	2195.3
155°	2238.2	2244.3	2251.2	2261.9	2255.0
157.5°	2295.5	2300.2	2304.0	2319.2	2308.5
160°	2346.8	2351.4	2353.8	2366.7	2357.5
162.5°	2394.2	2394.2	2396.6	2411.1	2400.4
165°	2434.8	2432.5	2432.5	2447.8	2437.1
167.5°	2471.6	2464.7	2464.7	2479.9	2469.2
170°	2499.1	2493.0	2490.7	2506.0	2493.0
172.5°	2518.2	2512.1	2509.8	2525.1	2512.1
175°	2533.5	2527.4	2522.8	2538.2	2525.1
177.5°	2541.9	2535.8	2531.2	2544.2	2531.2
180°	2538.2	2538.2	2538.2	2538.2	2538.2

TEST NUMBER: P921732

CATALOG NUMBER: DFN2DIP-HX3F0-070D090US940-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.50	11.33	11.48	12.33	13.64	10.07	10.90	11.05	11.90	13.22
	3H	12.15	12.89	13.14	13.90	15.24	11.68	12.42	12.67	13.43	14.77
	4H	12.73	13.43	13.74	14.44	15.79	12.26	12.96	13.27	13.98	15.32
	6H	13.12	13.77	14.14	14.79	16.15	12.65	13.30	13.67	14.31	15.68
	8H	13.22	13.84	14.25	14.87	16.23	12.75	13.37	13.78	14.40	15.76
	12H	13.26	13.85	14.30	14.88	16.26	12.79	13.38	13.82	14.40	15.79
4H	2H	10.95	11.66	11.97	12.67	14.02	10.61	11.31	11.62	12.32	13.67
	3H	12.81	13.39	13.83	14.43	15.80	12.42	13.00	13.44	14.04	15.41
	4H	13.51	14.05	14.54	15.08	16.47	13.11	13.65	14.14	14.68	16.07
	6H	14.02	14.48	15.06	15.54	16.92	13.61	14.08	14.66	15.13	16.51
	8H	14.16	14.60	15.21	15.64	17.04	13.76	14.19	14.80	15.24	16.63
	12H	14.23	14.62	15.29	15.69	17.09	13.81	14.21	14.88	15.27	16.67
8H	4H	13.70	14.14	14.75	15.18	16.58	13.35	13.78	14.39	14.83	16.22
	6H	14.32	14.68	15.39	15.77	17.16	13.96	14.32	15.03	15.41	16.81
	8H	14.54	14.85	15.61	15.93	17.34	14.17	14.49	15.25	15.56	16.98
	12H	14.66	14.94	15.74	16.01	17.46	14.28	14.56	15.36	15.63	17.08
12H	4H	13.69	14.08	14.75	15.14	16.54	13.34	13.73	14.40	14.79	16.19
	6H	14.35	14.67	15.43	15.74	17.15	14.00	14.32	15.08	15.39	16.81
	8H	14.59	14.86	15.66	15.93	17.39	14.23	14.51	15.31	15.58	17.03