

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921748

Luminaire Tested: DFN2DIP-HX3F0-080D060US940-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921748
REPORT IS A COMBINATION OF REPORTS P899254 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-080D060US940-RLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10798.6 lumens
Efficiency: N/A
Efficacy: 86.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 125.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921748

CATALOG NUMBER: DFN2DIP-HX3F0-080D060US940-RLFL

Luminous Intensity Polar Plot

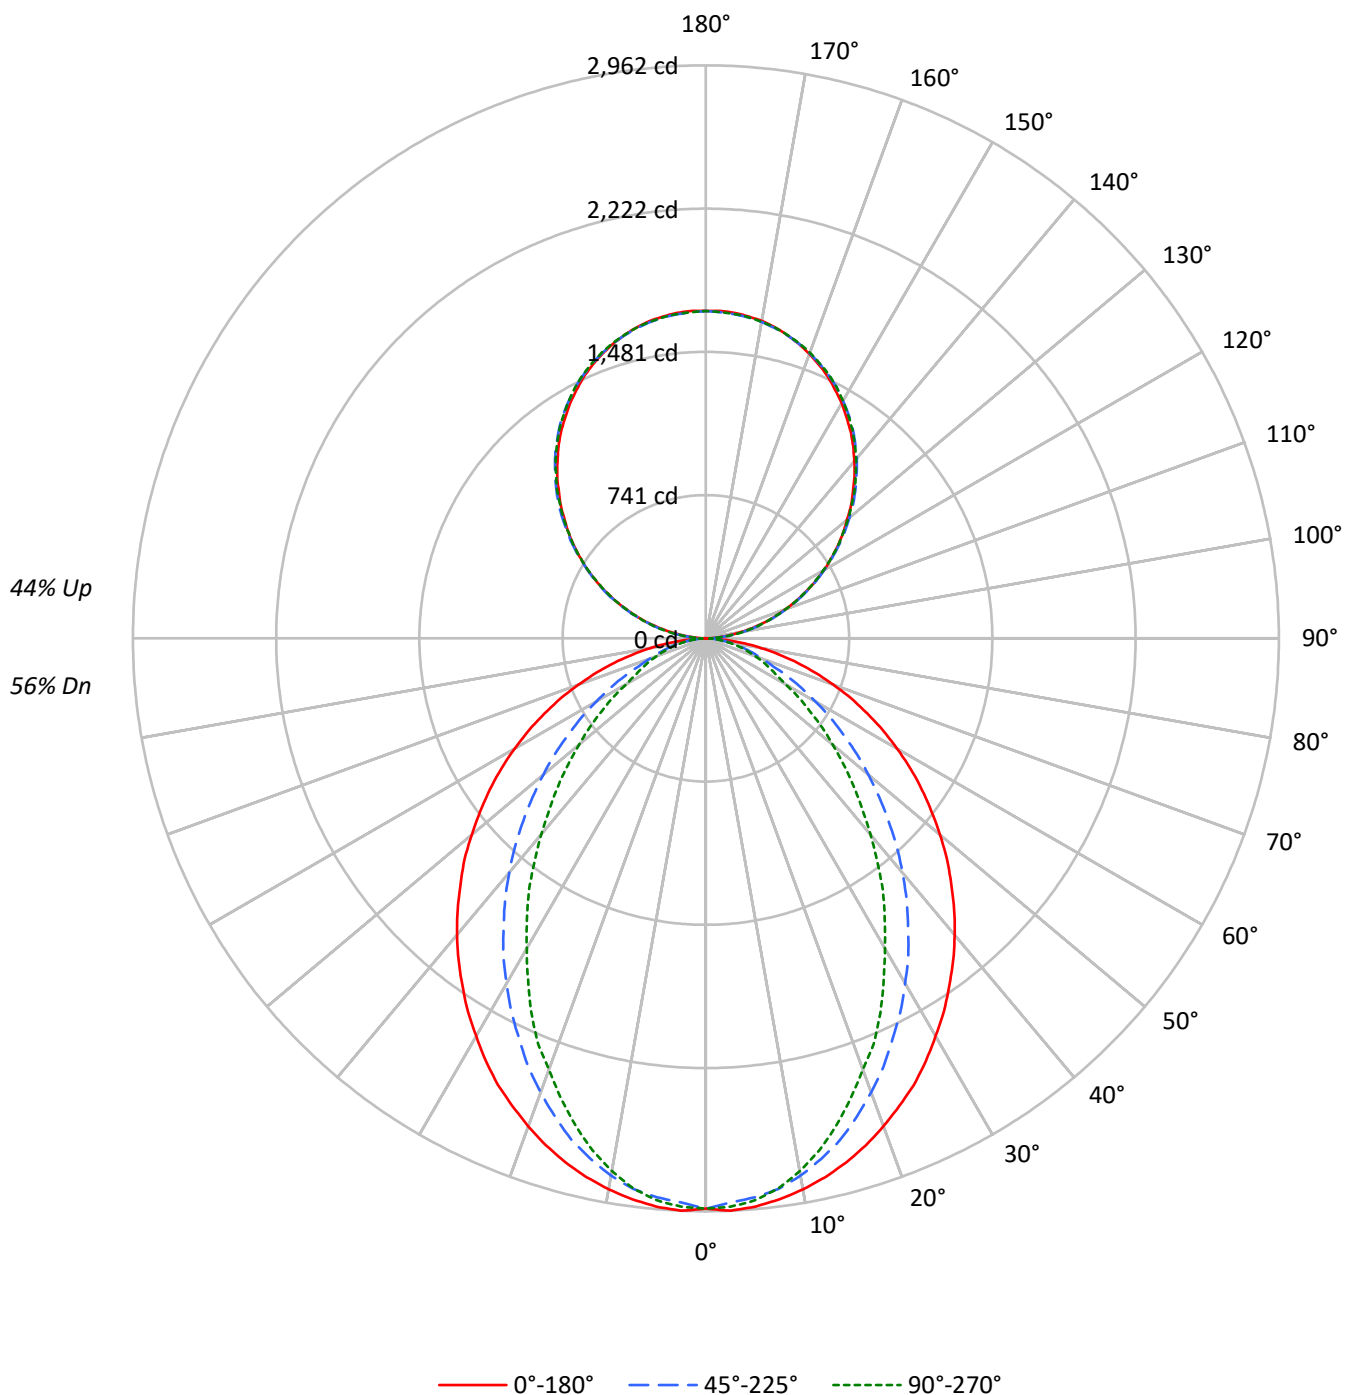

TEST NUMBER: P921748

CATALOG NUMBER: DFN2DIP-HX3F0-080D060US940-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	55	54	53
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	49	47	46
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	30
6	65	53	46	40	61	50	43	38	44	38	34	38	34	31	33	30	27
7	61	48	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3415	3415	3415
5°	3419	3359	3381
10°	3384	3290	3269
15°	3336	3179	3097
20°	3272	3027	2887
25°	3208	2857	2684
30°	3121	2683	2427
35°	3037	2496	2202
40°	2950	2303	1944
45°	2850	2088	1710
50°	2747	1873	1481
55°	2638	1642	1262
60°	2513	1401	1037
65°	2368	1157	931
70°	2193	929	840
75°	1972	814	761
80°	1653	676	653
85°	1130	439	479

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2850 cd/sqm

TEST NUMBER: P921748

CATALOG NUMBER: DFN2DIP-HX3F0-080D060US940-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.3	2.6
10°-20°	758.6	7.0
20°-30°	1065.0	9.9
30°-40°	1160.9	10.8
40°-50°	1067.0	9.9
50°-60°	838.0	7.8
60°-70°	545.4	5.1
70°-80°	280.8	2.6
80°-90°	76.5	0.7
90°-100°	104.7	1.0
100°-110°	332.7	3.1
110°-120°	569.3	5.3
120°-130°	748.8	6.9
130°-140°	840.5	7.8
140°-150°	824.2	7.6
150°-160°	691.4	6.4
160°-170°	458.5	4.2
170°-180°	160.3	1.5
0°-30°	2099.9	19.4
0°-40°	3260.8	30.2
0°-60°	5165.8	47.8
0°-90°	6068.5	56.2
90°-120°	1006.7	9.3
90°-150°	3420.1	31.7
90°-180°	4730.0	43.8
0°-180°	10798.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2948	2948	2948	2948	2948	
5°	2948	2935	2900	2924	2916	280
15°	2804	2775	2684	2634	2607	790
25°	2546	2460	2284	2175	2134	1171
35°	2193	2057	1822	1654	1595	1373
45°	1793	1614	1334	1144	1081	1385
55°	1363	1155	867	707	656	1218
65°	921	704	464	374	365	913
75°	491	304	214	195	192	519
85°	115	59	51	51	51	132
90°	2	18	50	47	48	11
95°	74	89	91	91	89	83
105°	307	311	314	317	317	324
115°	571	580	577	575	571	565
125°	831	844	840	835	834	743
135°	1075	1091	1094	1092	1088	831
145°	1305	1315	1323	1325	1319	815
155°	1492	1496	1501	1508	1503	687
165°	1623	1622	1622	1632	1625	458
175°	1689	1685	1682	1692	1683	160
180°	1692	1692	1692	1692	1692	

TEST NUMBER: P921748

CATALOG NUMBER: DFN2DIP-HX3F0-080D060US940-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2948.4	2948.4	2948.4	2948.4	2948.4
2.5°	2961.6	2948.4	2918.9	2945.8	2940.4
5°	2948.4	2935.1	2900.2	2924.3	2916.3
7.5°	2924.3	2908.4	2871.0	2881.6	2868.2
10°	2892.3	2873.6	2820.4	2812.2	2796.3
12.5°	2852.4	2828.3	2756.1	2740.2	2710.8
15°	2804.3	2774.8	2684.2	2633.6	2606.9
17.5°	2748.2	2705.4	2593.4	2534.8	2492.0
20°	2684.2	2630.7	2497.4	2430.9	2371.9
22.5°	2614.9	2553.4	2398.6	2308.0	2268.1
25°	2545.5	2460.1	2283.9	2174.7	2134.5
27.5°	2462.8	2371.9	2177.2	2051.8	1990.4
30°	2374.8	2273.1	2059.8	1923.9	1851.6
32.5°	2289.3	2166.5	1947.9	1787.7	1720.9
35°	2193.3	2057.2	1822.5	1654.4	1595.4
37.5°	2099.9	1953.0	1705.0	1520.7	1454.2
40°	2001.2	1841.2	1582.2	1392.8	1323.4
42.5°	1899.8	1729.1	1459.6	1262.0	1195.4
45°	1793.1	1614.2	1334.2	1144.5	1080.6
47.5°	1691.8	1502.4	1214.2	1024.5	965.9
50°	1579.6	1390.3	1096.7	912.4	856.6
52.5°	1470.1	1269.9	984.5	808.5	757.9
55°	1363.3	1155.3	867.1	707.1	656.5
57.5°	1254.1	1040.6	763.2	613.8	571.0
60°	1141.9	928.5	653.6	517.7	475.0
62.5°	1032.7	819.2	560.3	432.3	411.1
65°	920.6	704.3	464.2	373.7	365.4
67.5°	813.9	597.6	373.7	328.1	320.2
70°	701.8	493.7	309.4	282.8	272.1
72.5°	595.0	397.4	258.8	237.6	232.1
75°	490.9	304.1	213.5	194.7	192.3
77.5°	387.0	216.0	168.2	157.4	152.0
80°	290.7	154.9	128.0	117.4	117.4
82.5°	202.7	104.2	88.0	82.7	82.7
85°	114.7	58.6	50.6	50.6	50.6
87.5°	42.7	21.2	21.2	18.7	18.7
90°	1.5	18.4	50.0	46.9	48.4
92.5°	31.7	42.9	44.4	45.9	45.9
95°	74.5	88.7	91.3	91.3	88.7
97.5°	123.9	137.2	142.9	142.9	142.9
100°	181.1	192.8	196.9	196.9	195.4
102.5°	241.3	249.9	255.6	257.1	255.6
105°	307.1	311.2	314.2	316.8	316.8
107.5°	372.4	378.5	378.5	379.5	372.4
110°	435.7	443.8	443.8	443.8	439.7

TEST NUMBER: P921748

CATALOG NUMBER: DFN2DIP-HX3F0-080D060US940-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	504.0	512.6	511.1	507.0	504.0
115°	571.3	579.5	576.9	575.4	571.3
117.5°	638.2	649.4	642.2	638.2	634.1
120°	705.5	716.8	705.5	705.5	700.9
122.5°	766.7	781.0	773.8	769.8	766.7
125°	831.0	843.7	839.6	835.1	833.6
127.5°	893.8	909.5	903.9	897.9	893.8
130°	952.4	970.8	968.2	965.2	959.6
132.5°	1018.2	1032.5	1033.5	1026.4	1022.3
135°	1074.9	1090.7	1093.7	1092.2	1088.1
137.5°	1138.1	1150.8	1153.4	1152.4	1146.3
140°	1193.7	1206.5	1213.6	1213.6	1208.0
142.5°	1250.8	1263.6	1267.7	1269.2	1263.6
145°	1304.9	1315.1	1323.3	1324.8	1319.2
147.5°	1353.3	1366.1	1372.3	1374.7	1369.1
150°	1403.4	1412.0	1417.6	1422.2	1417.6
152.5°	1447.7	1456.4	1463.6	1469.2	1463.6
155°	1492.1	1496.2	1500.7	1508.0	1503.3
157.5°	1530.4	1533.5	1536.0	1546.2	1539.1
160°	1564.6	1567.6	1569.1	1577.8	1571.7
162.5°	1596.2	1596.2	1597.7	1607.4	1600.3
165°	1623.2	1621.7	1621.7	1631.9	1624.8
167.5°	1647.7	1643.2	1643.2	1653.3	1646.2
170°	1666.1	1662.0	1660.5	1670.6	1662.0
172.5°	1678.8	1674.7	1673.2	1683.4	1674.7
175°	1689.0	1685.0	1681.9	1692.1	1683.4
177.5°	1694.6	1690.6	1687.5	1696.1	1687.5
180°	1692.1	1692.1	1692.1	1692.1	1692.1

TEST NUMBER: P921748

CATALOG NUMBER: DFN2DIP-HX3F0-080D060US940-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.93	12.81	12.84	13.74	14.92	7.91	8.79	8.82	9.71	10.90
	3H	13.60	14.39	14.52	15.33	16.53	9.09	9.88	10.02	10.82	12.03
	4H	14.21	14.96	15.15	15.89	17.11	9.54	10.29	10.48	11.23	12.45
	6H	14.63	15.31	15.57	16.26	17.49	9.86	10.55	10.81	11.49	12.72
	8H	14.75	15.41	15.71	16.37	17.59	9.95	10.61	10.91	11.57	12.80
	12H	14.81	15.43	15.77	16.39	17.64	10.00	10.62	10.96	11.57	12.82
4H	2H	11.95	12.70	12.89	13.64	14.85	8.50	9.25	9.45	10.19	11.40
	3H	13.78	14.40	14.73	15.37	16.60	9.85	10.47	10.80	11.44	12.67
	4H	14.47	15.03	15.43	15.99	17.25	10.40	10.97	11.36	11.93	13.18
	6H	14.98	15.46	15.95	16.45	17.71	10.82	11.30	11.79	12.29	13.54
	8H	15.15	15.60	16.12	16.58	17.85	10.94	11.40	11.92	12.38	13.65
	12H	15.24	15.65	16.24	16.65	17.92	11.01	11.42	12.00	12.41	13.69
8H	4H	14.44	14.89	15.41	15.87	17.14	10.68	11.13	11.65	12.11	13.38
	6H	15.00	15.37	16.00	16.39	17.66	11.19	11.57	12.19	12.59	13.86
	8H	15.21	15.54	16.22	16.55	17.83	11.38	11.71	12.39	12.72	14.01
	12H	15.34	15.64	16.36	16.64	17.97	11.50	11.79	12.51	12.79	14.12
12H	4H	14.39	14.80	15.39	15.80	17.07	10.69	11.09	11.68	12.09	13.36
	6H	14.97	15.30	15.98	16.31	17.60	11.24	11.57	12.25	12.58	13.87
	8H	15.19	15.48	16.20	16.48	17.82	11.45	11.74	12.46	12.74	14.07