

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926905

Luminaire Tested: DFN2DIP-HX4F0-040D120US830-RLLFLL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P926905
REPORT IS A COMBINATION OF REPORTS P899444 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-040D120US830-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13213.9 lumens
Efficiency: N/A
Efficacy: 102.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 129.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926905

CATALOG NUMBER: DFN2DIP-HX4F0-040D120US830-RLFL

Luminous Intensity Polar Plot

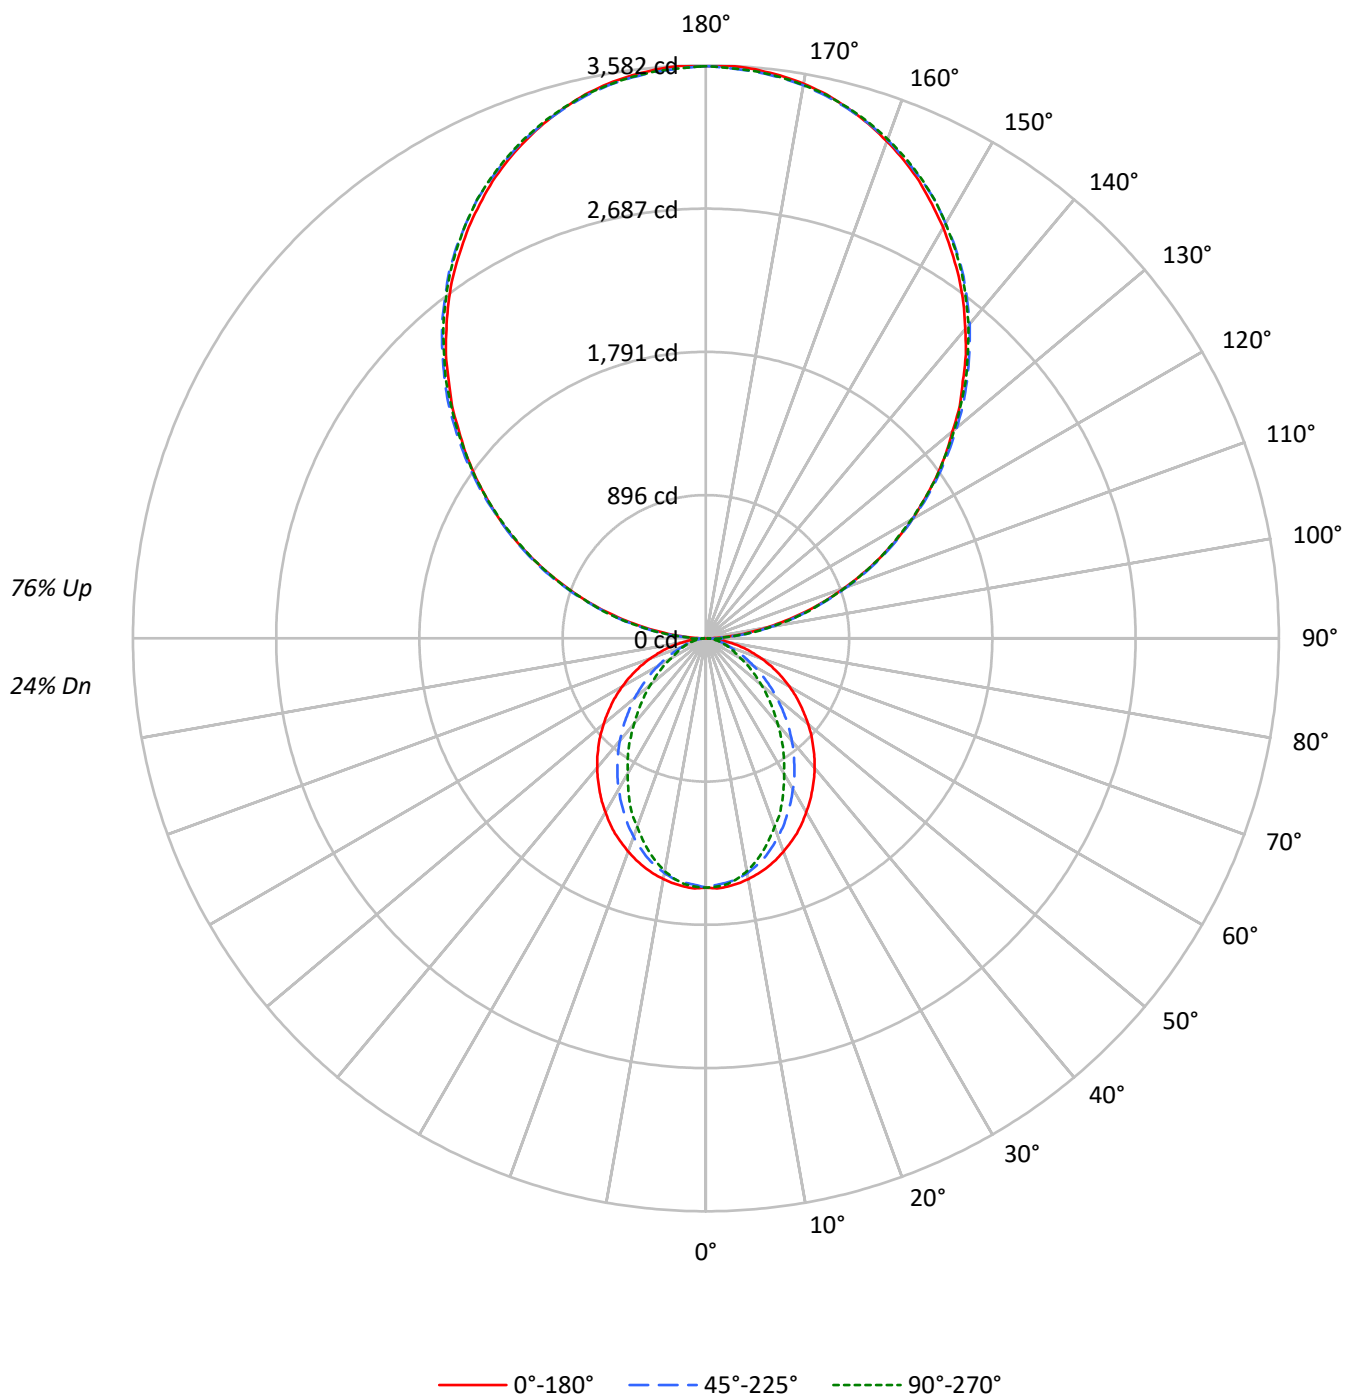

TEST NUMBER: P926905

CATALOG NUMBER: DFN2DIP-HX4F0-040D120US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33
1	92	88	85	81	82	79	76	73	61	59	57	44	43	42	29	28	28
2	84	77	71	67	75	69	64	60	53	50	47	39	37	35	26	25	24
3	77	68	61	56	68	61	55	50	47	43	40	35	32	30	23	22	20
4	70	60	53	47	62	54	48	43	42	38	34	31	28	26	21	19	18
5	64	54	46	40	57	48	42	37	38	33	29	28	25	22	19	17	16
6	59	48	40	35	53	43	37	32	34	29	26	25	22	20	17	15	14
7	55	43	36	30	49	39	32	28	31	26	23	23	20	17	16	14	12
8	51	39	32	27	45	35	29	24	28	23	20	21	18	16	14	12	11
9	47	36	29	24	42	32	26	22	25	21	18	19	16	14	13	11	10
10	44	33	26	21	39	29	23	19	23	19	16	18	15	13	12	10	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1159	1159	1159
5°	1160	1140	1148
10°	1149	1118	1110
15°	1133	1081	1053
20°	1113	1030	982
25°	1091	973	913
30°	1063	915	827
35°	1035	852	751
40°	1006	787	663
45°	973	715	584
50°	938	642	507
55°	903	564	432
60°	861	483	356
65°	813	400	320
70°	756	322	290
75°	683	284	264
80°	578	239	229
85°	404	160	173

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2696 cd/sqm

TEST NUMBER: P926905

CATALOG NUMBER: DFN2DIP-HX4F0-040D120US830-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.0	1.1
10°-20°	400.9	3.0
20°-30°	562.8	4.3
30°-40°	613.5	4.6
40°-50°	563.9	4.3
50°-60°	442.8	3.4
60°-70°	288.3	2.2
70°-80°	148.4	1.1
80°-90°	48.0	0.4
90°-100°	221.3	1.7
100°-110°	703.3	5.3
110°-120°	1203.5	9.1
120°-130°	1582.8	12.0
130°-140°	1776.6	13.4
140°-150°	1742.2	13.2
150°-160°	1461.5	11.1
160°-170°	969.2	7.3
170°-180°	338.8	2.6
0°-30°	1109.7	8.4
0°-40°	1723.2	13.0
0°-60°	2730.0	20.7
0°-90°	3214.7	24.3
90°-120°	2128.1	16.1
90°-150°	7229.8	54.7
90°-180°	9999.0	75.7
0°-180°	13213.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1558	1558	1558	1558	1558	
5°	1558	1551	1533	1545	1541	148
15°	1482	1466	1419	1392	1378	418
25°	1345	1300	1207	1149	1128	619
35°	1159	1087	963	874	843	726
45°	948	853	705	605	571	732
55°	720	611	458	374	347	644
65°	486	372	245	198	193	482
75°	259	161	113	103	102	274
85°	61	31	27	27	27	70
90°	3	39	106	99	102	13
95°	157	188	193	193	188	175
105°	649	658	664	670	670	685
115°	1208	1225	1220	1216	1208	1195
125°	1757	1784	1775	1765	1762	1570
135°	2272	2306	2312	2309	2300	1756
145°	2758	2780	2797	2800	2789	1724
155°	3154	3163	3172	3188	3178	1452
165°	3431	3428	3428	3450	3435	968
175°	3570	3562	3555	3577	3559	339
180°	3577	3577	3577	3577	3577	

TEST NUMBER: P926905

CATALOG NUMBER: DFN2DIP-HX4F0-040D120US830-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1558.1	1558.1	1558.1	1558.1	1558.1
2.5°	1565.2	1558.1	1542.6	1556.8	1553.9
5°	1558.1	1551.1	1532.7	1545.4	1541.3
7.5°	1545.4	1537.0	1517.3	1522.8	1515.8
10°	1528.5	1518.7	1490.5	1486.1	1477.8
12.5°	1507.4	1494.7	1456.5	1448.2	1432.6
15°	1482.0	1466.4	1418.6	1391.8	1377.7
17.5°	1452.4	1429.8	1370.5	1339.6	1317.0
20°	1418.6	1390.3	1319.8	1284.6	1253.5
22.5°	1381.9	1349.5	1267.6	1219.7	1198.7
25°	1345.2	1300.1	1207.0	1149.3	1128.0
27.5°	1301.6	1253.5	1150.6	1084.3	1051.8
30°	1255.0	1201.3	1088.5	1016.7	978.6
32.5°	1209.9	1144.9	1029.4	944.8	909.4
35°	1159.2	1087.2	963.1	874.3	843.2
37.5°	1109.8	1032.1	901.0	803.7	768.5
40°	1057.6	973.0	836.2	736.1	699.4
42.5°	1004.0	913.8	771.3	666.9	631.8
45°	947.6	853.1	705.1	604.9	571.1
47.5°	894.1	794.0	641.7	541.5	510.5
50°	834.8	734.7	579.5	482.2	452.7
52.5°	776.9	671.2	520.4	427.2	400.5
55°	720.5	610.6	458.2	373.7	346.9
57.5°	662.8	549.9	403.3	324.3	301.8
60°	603.5	490.7	345.4	273.6	251.1
62.5°	545.8	433.0	296.0	228.5	217.2
65°	486.5	372.2	245.3	197.5	193.1
67.5°	430.2	315.8	197.5	173.4	169.2
70°	370.9	260.9	163.5	149.5	143.7
72.5°	314.5	210.1	136.8	125.5	122.7
75°	259.4	160.7	112.8	102.9	101.6
77.5°	204.5	114.1	88.9	83.2	80.3
80°	153.6	81.8	67.6	62.1	62.1
82.5°	107.2	55.0	46.6	43.6	43.6
85°	60.6	31.0	26.8	26.8	26.8
87.5°	22.6	11.2	11.2	9.9	9.9
90°	3.2	38.8	105.7	99.2	102.4
92.5°	66.8	90.6	93.8	97.1	97.1
95°	157.4	187.7	193.0	193.0	187.7
97.5°	262.0	290.1	302.0	302.0	302.0
100°	382.8	407.6	416.2	416.2	413.0
102.5°	510.1	528.4	540.2	543.5	540.2
105°	649.2	657.8	664.3	669.6	669.6
107.5°	787.2	800.2	800.2	802.3	787.2
110°	920.9	938.2	938.2	938.2	929.6

TEST NUMBER: P926905

CATALOG NUMBER: DFN2DIP-HX4F0-040D120US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1065.4	1083.8	1080.5	1071.9	1065.4
115°	1207.7	1225.1	1219.6	1216.4	1207.7
117.5°	1349.0	1372.8	1357.7	1349.0	1340.4
120°	1491.4	1515.1	1491.4	1491.4	1481.7
122.5°	1620.8	1651.0	1635.9	1627.2	1620.8
125°	1756.6	1783.6	1775.0	1765.3	1762.0
127.5°	1889.3	1922.7	1910.8	1897.9	1889.3
130°	2013.3	2052.1	2046.7	2040.2	2028.4
132.5°	2152.4	2182.6	2184.7	2169.6	2161.1
135°	2272.1	2305.5	2312.0	2308.7	2300.2
137.5°	2405.8	2432.8	2438.2	2436.0	2423.1
140°	2523.4	2550.3	2565.4	2565.4	2553.5
142.5°	2644.2	2671.1	2679.7	2682.9	2671.1
145°	2758.4	2780.0	2797.2	2800.5	2788.7
147.5°	2860.9	2887.8	2900.8	2906.2	2894.3
150°	2966.6	2984.9	2996.8	3006.5	2996.8
152.5°	3060.4	3078.7	3093.9	3105.7	3093.9
155°	3154.2	3162.8	3172.5	3187.6	3177.9
157.5°	3235.1	3241.5	3246.9	3268.5	3253.4
160°	3307.3	3313.8	3317.0	3335.4	3322.4
162.5°	3374.2	3374.2	3377.4	3397.9	3382.8
165°	3431.4	3428.2	3428.2	3449.6	3434.6
167.5°	3483.1	3473.4	3473.4	3495.0	3479.9
170°	3521.9	3513.3	3510.1	3531.6	3513.3
172.5°	3548.9	3540.2	3537.0	3558.6	3540.2
175°	3570.5	3561.8	3555.4	3576.9	3558.6
177.5°	3582.3	3573.7	3567.2	3585.6	3567.2
180°	3576.9	3576.9	3576.9	3576.9	3576.9

TEST NUMBER: P926905

CATALOG NUMBER: DFN2DIP-HX4F0-040D120US830-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.57	5.23	5.73	6.37	7.97	0.55	1.20	1.70	2.34	3.94
	3H	6.24	6.83	7.40	7.97	9.59	1.72	2.31	2.89	3.46	5.07
	4H	6.84	7.40	8.01	8.55	10.16	2.17	2.73	3.34	3.87	5.49
	6H	7.25	7.77	8.43	8.92	10.54	2.48	2.99	3.66	4.14	5.77
	8H	7.38	7.86	8.56	9.03	10.65	2.57	3.06	3.75	4.22	5.84
	12H	7.43	7.89	8.62	9.05	10.70	2.61	3.07	3.79	4.23	5.87
4H	2H	4.57	5.13	5.75	6.28	7.89	1.12	1.68	2.30	2.83	4.44
	3H	6.39	6.85	7.57	8.02	9.65	2.46	2.92	3.64	4.09	5.72
	4H	7.07	7.50	8.26	8.66	10.31	3.00	3.43	4.18	4.59	6.24
	6H	7.58	7.94	8.77	9.13	10.76	3.41	3.78	4.60	4.96	6.60
	8H	7.75	8.09	8.94	9.27	10.92	3.54	3.88	4.72	5.05	6.71
	12H	7.84	8.15	9.04	9.33	10.99	3.60	3.91	4.80	5.09	6.75
8H	4H	7.03	7.37	8.21	8.54	10.20	3.27	3.61	4.45	4.78	6.44
	6H	7.59	7.87	8.79	9.09	10.74	3.78	4.06	4.99	5.28	6.93
	8H	7.80	8.05	9.02	9.24	10.91	3.97	4.22	5.18	5.41	7.08
	12H	7.94	8.15	9.15	9.34	11.05	4.09	4.30	5.30	5.49	7.20
12H	4H	6.97	7.28	8.17	8.47	10.12	3.26	3.57	4.47	4.76	6.42
	6H	7.56	7.81	8.77	9.00	10.67	3.83	4.08	5.04	5.27	6.94
	8H	7.78	7.99	8.99	9.18	10.89	4.04	4.25	5.25	5.44	7.14