

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926923

Luminaire Tested: DFN2DIP-HX4F0-050D080US830-FLLFLL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P926923
REPORT IS A COMBINATION OF REPORTS P899373 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-050D080US830-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11338.3 lumens
Efficiency: N/A
Efficacy: 111.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 102
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926923

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US830-FLLFLL

Luminous Intensity Polar Plot

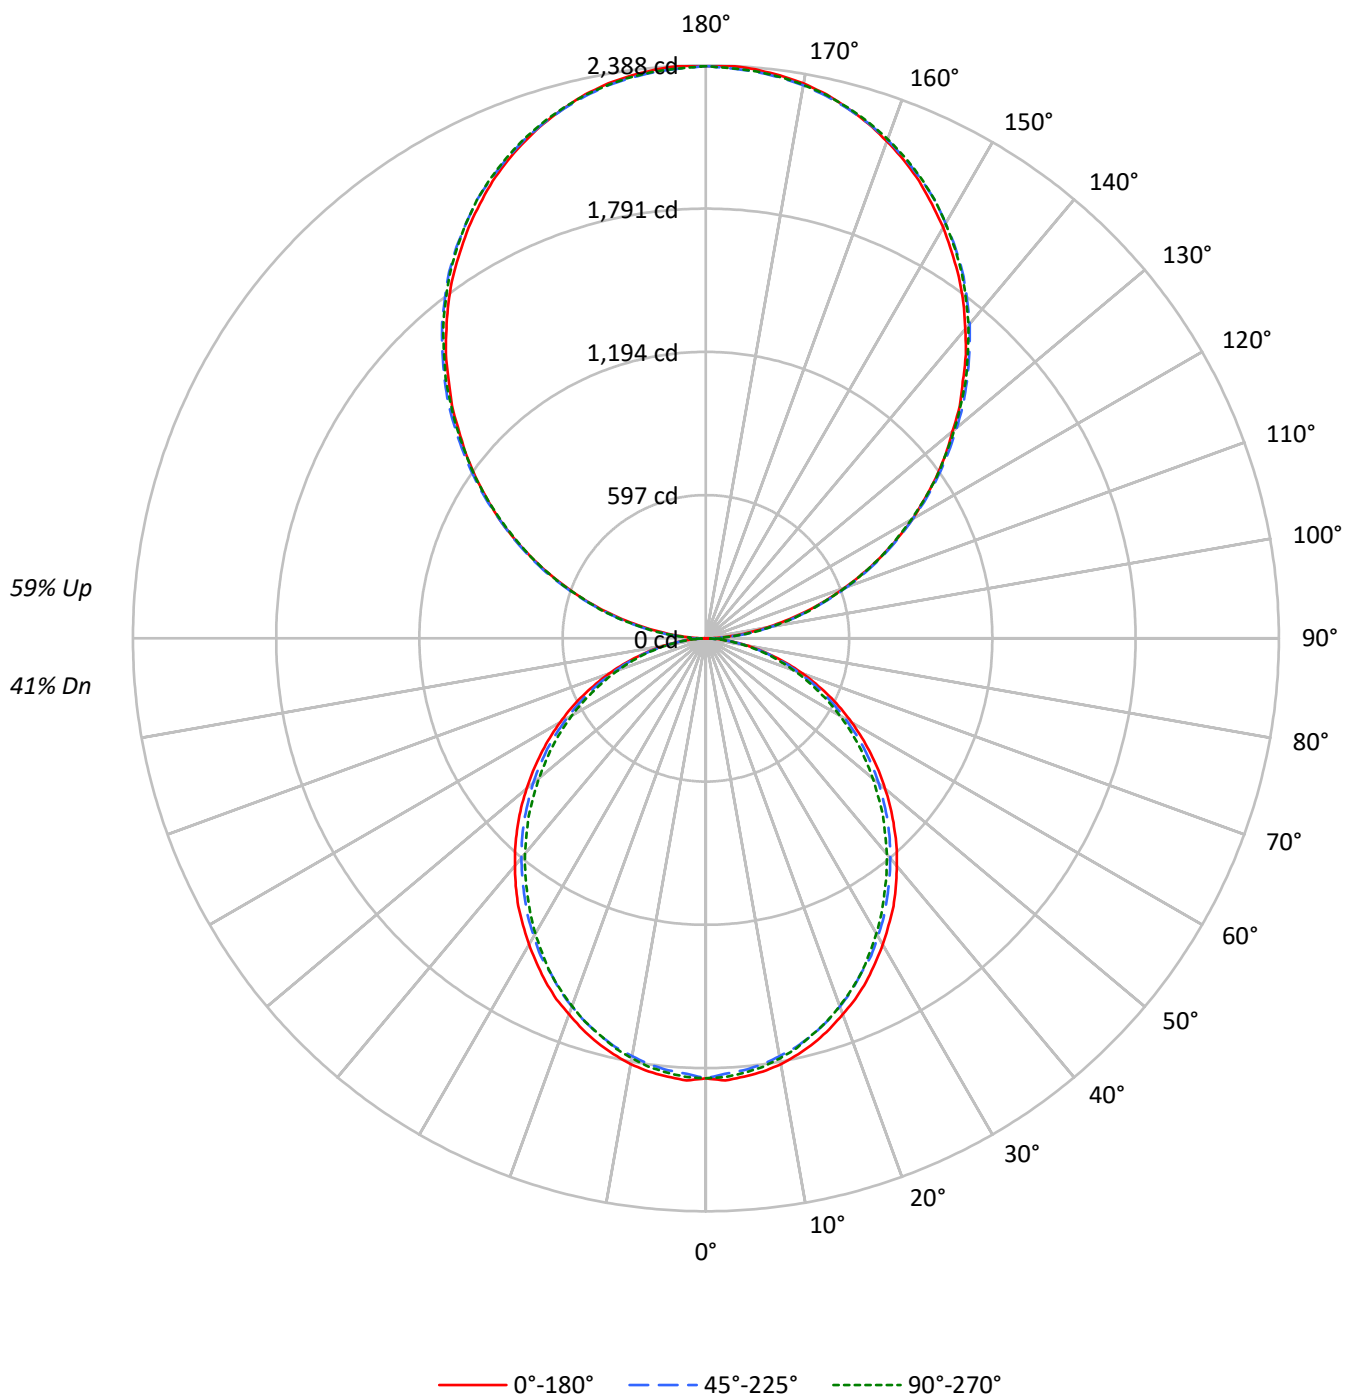

TEST NUMBER: P926923

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US830-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48
1	96	92	88	84	87	84	80	77	69	66	64	55	53	52	42	41	41
2	87	80	74	69	79	73	68	63	60	56	53	48	46	43	37	36	34
3	80	70	63	57	72	64	58	53	53	48	45	43	39	37	33	31	29
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	30	27	25
5	67	55	47	41	61	51	44	38	42	37	33	34	30	27	27	24	22
6	61	50	42	36	56	46	38	33	38	33	29	31	27	24	24	21	19
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17
8	53	40	33	28	48	37	31	26	31	26	22	26	22	19	20	17	15
9	49	37	30	25	45	34	27	23	29	23	20	24	20	17	19	16	14
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1363	1363	1363
5°	1366	1345	1354
10°	1355	1327	1335
15°	1335	1305	1307
20°	1308	1275	1278
25°	1282	1238	1244
30°	1248	1205	1201
35°	1216	1165	1155
40°	1177	1125	1112
45°	1138	1085	1067
50°	1096	1043	1016
55°	1051	994	969
60°	1001	936	915
65°	946	876	851
70°	877	803	783
75°	780	716	720
80°	663	604	599
85°	481	412	398

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1798 cd/sqm

TEST NUMBER: P926923

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	172.6	1.5
10°-20°	485.6	4.3
20°-30°	713.6	6.3
30°-40°	828.8	7.3
40°-50°	827.8	7.3
50°-60°	721.8	6.4
60°-70°	533.6	4.7
70°-80°	301.9	2.7
80°-90°	86.5	0.8
90°-100°	147.6	1.3
100°-110°	468.9	4.1
110°-120°	802.3	7.1
120°-130°	1055.2	9.3
130°-140°	1184.4	10.4
140°-150°	1161.5	10.2
150°-160°	974.3	8.6
160°-170°	646.1	5.7
170°-180°	225.8	2.0
0°-30°	1371.8	12.1
0°-40°	2200.6	19.4
0°-60°	3750.2	33.1
0°-90°	4672.2	41.2
90°-120°	1418.8	12.5
90°-150°	4819.9	42.5
90°-180°	6666.0	58.8
0°-180°	11338.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1834	1834	1834	1834	1834	
5°	1834	1827	1807	1821	1818	174
15°	1746	1735	1712	1719	1710	492
25°	1580	1566	1536	1539	1536	727
35°	1363	1345	1317	1306	1298	851
45°	1109	1097	1070	1051	1044	856
55°	839	829	808	786	778	750
65°	566	555	538	522	513	560
75°	296	293	284	273	277	316
85°	72	70	69	63	62	81
90°	2	26	70	66	68	11
95°	105	125	129	129	125	117
105°	433	438	443	446	446	457
115°	805	817	813	811	805	796
125°	1171	1189	1183	1177	1175	1047
135°	1515	1537	1541	1539	1533	1171
145°	1839	1853	1865	1867	1859	1149
155°	2103	2109	2115	2125	2119	968
165°	2288	2285	2285	2300	2290	645
175°	2380	2374	2370	2385	2372	226
180°	2385	2385	2385	2385	2385	

TEST NUMBER: P926923

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1833.6	1833.6	1833.6	1833.6	1833.6
2.5°	1844.3	1835.5	1816.1	1833.6	1830.3
5°	1833.6	1826.8	1807.2	1821.3	1818.0
7.5°	1821.3	1810.8	1791.4	1805.6	1802.1
10°	1802.1	1789.7	1768.6	1782.6	1777.4
12.5°	1775.5	1765.0	1743.9	1752.7	1749.1
15°	1745.5	1735.0	1712.1	1719.2	1710.4
17.5°	1708.5	1698.0	1675.0	1683.8	1675.0
20°	1667.9	1657.5	1632.8	1638.0	1631.1
22.5°	1627.5	1611.6	1588.6	1588.6	1585.0
25°	1579.8	1565.8	1535.8	1539.2	1535.8
27.5°	1526.8	1514.5	1491.7	1486.4	1477.7
30°	1474.1	1459.9	1433.5	1428.3	1421.2
32.5°	1417.6	1407.2	1378.9	1368.2	1361.2
35°	1362.9	1345.4	1317.1	1306.5	1297.7
37.5°	1301.2	1285.4	1257.1	1244.8	1236.0
40°	1237.9	1223.6	1195.4	1179.6	1172.6
42.5°	1176.1	1161.9	1133.8	1116.0	1105.6
45°	1109.1	1096.8	1070.2	1051.0	1043.8
47.5°	1043.8	1031.5	1003.3	983.8	973.3
50°	975.0	966.3	941.6	916.9	908.0
52.5°	908.0	895.7	872.8	853.4	841.1
55°	839.4	828.7	807.5	786.4	777.7
57.5°	770.5	761.7	738.7	717.6	710.5
60°	701.7	694.8	670.1	650.6	645.4
62.5°	634.8	622.4	604.8	587.2	580.1
65°	566.1	555.4	537.8	522.0	513.1
67.5°	495.6	486.6	470.9	458.5	451.4
70°	430.3	423.2	407.3	394.9	388.0
72.5°	363.3	356.2	347.4	335.1	329.8
75°	296.1	292.7	283.8	273.3	276.9
77.5°	236.3	229.1	225.6	220.4	215.2
80°	176.4	174.6	171.0	165.8	162.2
82.5°	119.9	119.9	118.2	111.1	111.1
85°	72.2	70.5	68.8	63.4	61.7
87.5°	31.8	28.3	24.7	19.4	17.6
90°	2.2	25.9	70.5	66.2	68.3
92.5°	44.6	60.4	62.6	64.7	64.7
95°	105.0	125.1	128.7	128.7	125.1
97.5°	174.7	193.4	201.3	201.3	201.3
100°	255.2	271.7	277.5	277.5	275.3
102.5°	340.1	352.3	360.1	362.3	360.1
105°	432.8	438.5	442.9	446.5	446.5
107.5°	524.8	533.5	533.5	534.9	524.8
110°	613.9	625.4	625.4	625.4	619.7

TEST NUMBER: P926923

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	710.3	722.5	720.4	714.6	710.3
115°	805.2	816.7	813.1	810.9	805.2
117.5°	899.3	915.2	905.1	899.3	893.6
120°	994.2	1010.1	994.2	994.2	987.7
122.5°	1080.5	1100.7	1090.6	1084.8	1080.5
125°	1171.1	1189.1	1183.3	1176.8	1174.7
127.5°	1259.6	1281.8	1273.9	1265.3	1259.6
130°	1342.2	1368.0	1364.5	1360.2	1352.3
132.5°	1435.0	1455.0	1456.5	1446.5	1440.7
135°	1514.7	1537.0	1541.4	1539.2	1533.4
137.5°	1603.9	1621.9	1625.4	1624.0	1615.4
140°	1682.3	1700.2	1710.3	1710.3	1702.3
142.5°	1762.8	1780.8	1786.5	1788.7	1780.8
145°	1839.0	1853.3	1864.8	1867.0	1859.1
147.5°	1907.2	1925.2	1933.8	1937.5	1929.6
150°	1977.7	1989.9	1997.8	2004.3	1997.8
152.5°	2040.2	2052.5	2062.6	2070.5	2062.6
155°	2102.8	2108.6	2115.1	2125.1	2118.6
157.5°	2156.7	2161.1	2164.6	2179.0	2169.0
160°	2204.9	2209.2	2211.4	2223.5	2215.0
162.5°	2249.5	2249.5	2251.6	2265.3	2255.2
165°	2287.5	2285.4	2285.4	2299.8	2289.7
167.5°	2322.0	2315.6	2315.6	2330.0	2319.9
170°	2348.0	2342.2	2340.0	2354.5	2342.2
172.5°	2366.0	2360.2	2358.0	2372.4	2360.2
175°	2380.3	2374.5	2370.2	2384.6	2372.4
177.5°	2388.2	2382.5	2378.1	2390.4	2378.1
180°	2384.6	2384.6	2384.6	2384.6	2384.6

TEST NUMBER: P926923

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.48	8.26	8.50	9.30	10.69	7.04	7.83	8.07	8.87	10.26
	3H	9.13	9.84	10.17	10.88	12.29	8.66	9.36	9.70	10.41	11.82
	4H	9.72	10.39	10.77	11.43	12.85	9.24	9.91	10.29	10.96	12.38
	6H	10.11	10.73	11.17	11.78	13.21	9.64	10.25	10.70	11.31	12.74
	8H	10.22	10.80	11.28	11.87	13.30	9.74	10.33	10.81	11.40	12.82
	12H	10.26	10.82	11.33	11.88	13.33	9.78	10.34	10.85	11.40	12.85
4H	2H	7.93	8.60	8.99	9.65	11.06	7.58	8.25	8.64	9.30	10.72
	3H	9.79	10.35	10.86	11.42	12.85	9.40	9.96	10.46	11.03	12.46
	4H	10.50	11.01	11.57	12.08	13.53	10.10	10.61	11.17	11.67	13.13
	6H	11.01	11.45	12.09	12.54	13.99	10.60	11.04	11.68	12.13	13.58
	8H	11.16	11.57	12.24	12.66	14.12	10.75	11.16	11.83	12.24	13.71
	12H	11.23	11.60	12.33	12.70	14.17	10.81	11.18	11.91	12.28	13.75
8H	4H	10.69	11.10	11.77	12.19	13.65	10.33	10.74	11.41	11.83	13.29
	6H	11.32	11.66	12.43	12.79	14.25	10.96	11.30	12.06	12.42	13.88
	8H	11.54	11.84	12.65	12.95	14.43	11.17	11.47	12.28	12.58	14.06
	12H	11.67	11.93	12.79	13.04	14.55	11.29	11.55	12.40	12.65	14.17
12H	4H	10.68	11.05	11.77	12.14	13.61	10.32	10.70	11.42	11.79	13.26
	6H	11.35	11.65	12.46	12.76	14.24	11.00	11.30	12.11	12.40	13.88
	8H	11.59	11.85	12.71	12.96	14.47	11.23	11.50	12.35	12.60	14.12

END OF REPORT