

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926978

Luminaire Tested: DFN2DIP-HX4F0-060D120US830-RLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P926978
REPORT IS A COMBINATION OF REPORTS P900968 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-060D120US830-RLLONL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16003.7 lumens
Efficiency: N/A
Efficacy: 106.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 150.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926978

CATALOG NUMBER: DFN2DIP-HX4F0-060D120US830-RLLONL

Luminous Intensity Polar Plot

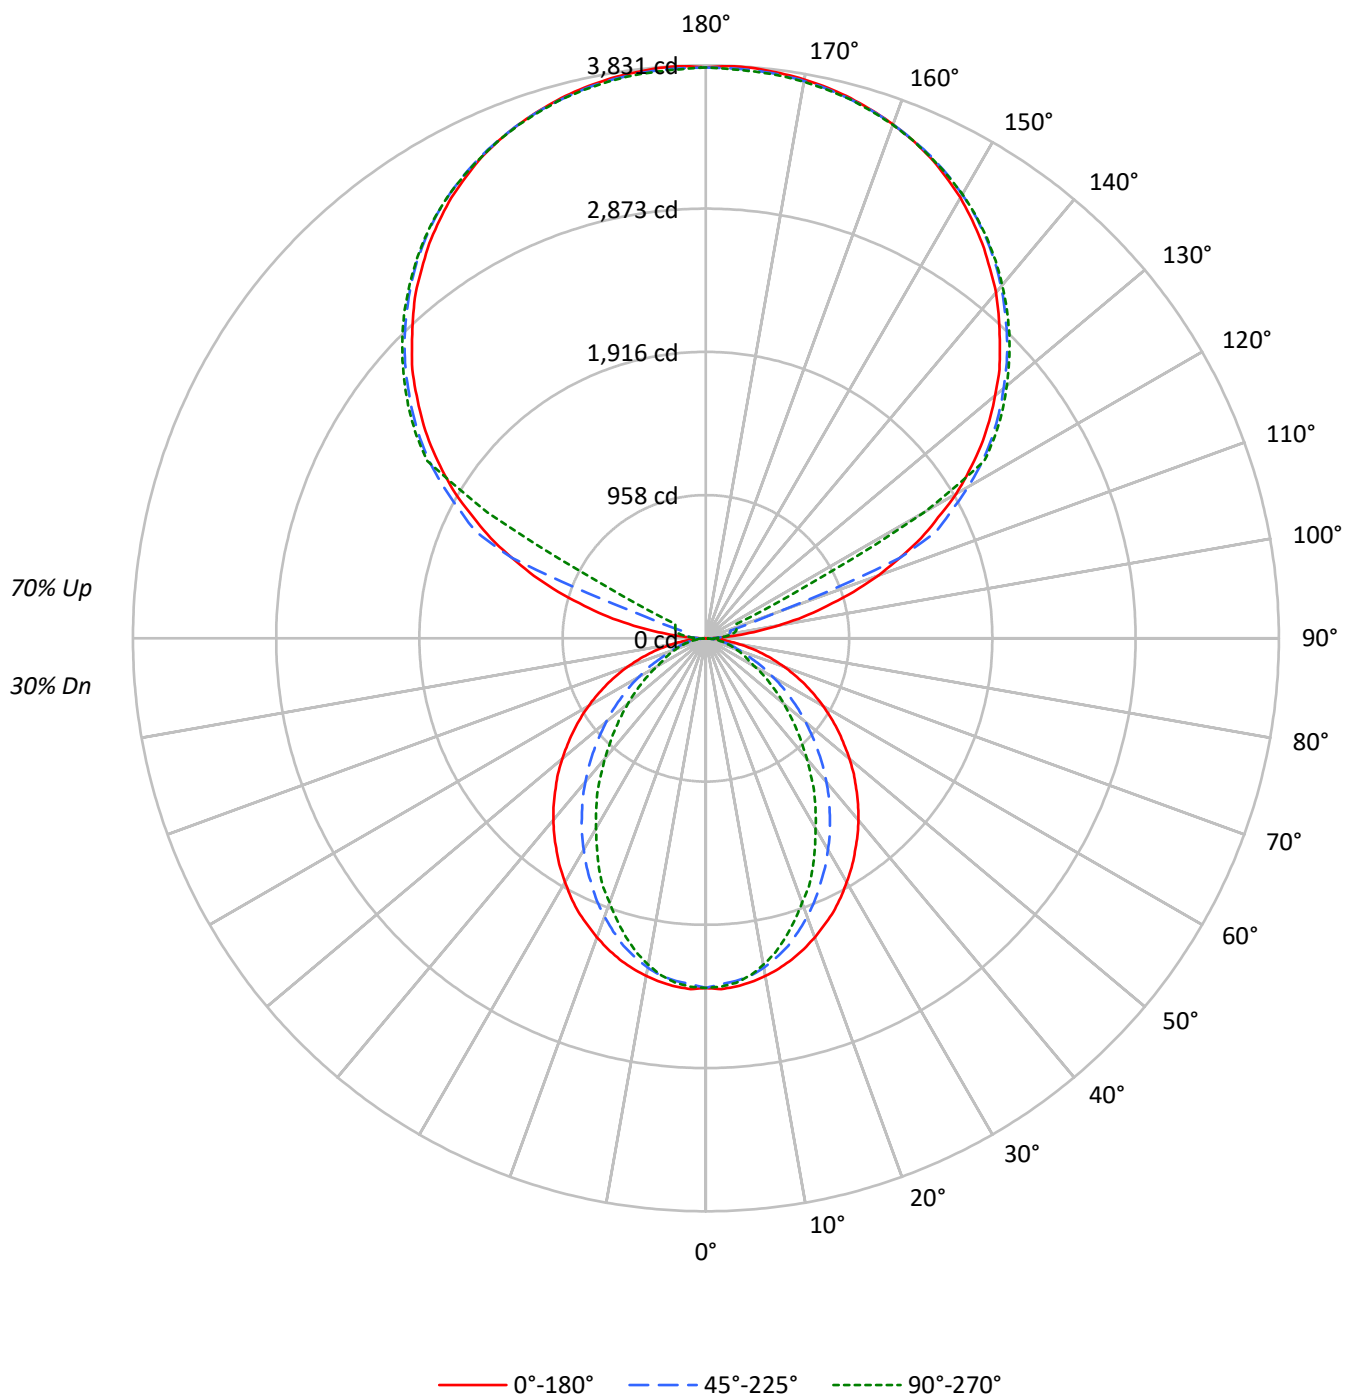

TEST NUMBER: P926978

CATALOG NUMBER: DFN2DIP-HX4F0-060D120US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	94	90	86	83	84	81	77	75	64	62	60	48	47	46	34	33	32
2	85	78	73	68	76	71	66	62	56	53	50	43	40	39	30	29	28
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16
7	56	44	37	31	50	40	34	29	32	28	24	25	22	19	18	16	15
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13
9	48	37	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12
10	45	33	27	22	40	30	24	20	25	20	17	20	16	14	14	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1738	1738	1738
5°	1741	1710	1721
10°	1724	1677	1665
15°	1700	1622	1579
20°	1669	1546	1473
25°	1637	1460	1370
30°	1594	1372	1240
35°	1552	1278	1126
40°	1509	1180	995
45°	1459	1072	876
50°	1407	963	760
55°	1354	846	648
60°	1292	724	534
65°	1220	600	481
70°	1133	484	435
75°	1025	427	396
80°	866	358	344
85°	606	241	259

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1961 cd/sqm

TEST NUMBER: P926978

CATALOG NUMBER: DFN2DIP-HX4F0-060D120US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	219.0	1.4
10°-20°	601.3	3.8
20°-30°	844.2	5.3
30°-40°	920.3	5.8
40°-50°	845.8	5.3
50°-60°	664.3	4.2
60°-70°	432.4	2.7
70°-80°	222.6	1.4
80°-90°	63.5	0.4
90°-100°	125.9	0.8
100°-110°	469.2	2.9
110°-120°	1244.4	7.8
120°-130°	2063.9	12.9
130°-140°	2192.3	13.7
140°-150°	2037.5	12.7
150°-160°	1638.1	10.2
160°-170°	1055.6	6.6
170°-180°	363.3	2.3
0°-30°	1664.6	10.4
0°-40°	2584.9	16.2
0°-60°	4095.0	25.6
0°-90°	4813.5	30.1
90°-120°	1839.4	11.5
90°-150°	8133.2	50.8
90°-180°	11190.0	69.9
0°-180°	16003.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2337	2337	2337	2337	2337	
5°	2337	2327	2299	2318	2312	222
15°	2223	2200	2128	2088	2066	626
25°	2018	1950	1810	1724	1692	928
35°	1739	1631	1445	1311	1265	1088
45°	1421	1280	1058	907	856	1098
55°	1081	916	687	561	520	966
65°	730	558	368	296	290	724
75°	389	241	169	154	152	412
85°	91	46	40	40	40	104
90°	3	33	55	69	74	15
95°	179	88	108	122	119	212
105°	840	923	169	199	210	897
115°	1588	1635	1704	425	227	1563
125°	2245	2281	2334	2353	2361	2003
135°	2779	2823	2848	2875	2870	2146
145°	3223	3220	3267	3287	3273	2016
155°	3549	3524	3558	3574	3552	1635
165°	3740	3723	3731	3751	3731	1057
175°	3825	3806	3811	3831	3803	364
180°	3817	3817	3817	3817	3817	

TEST NUMBER: P926978

CATALOG NUMBER: DFN2DIP-HX4F0-060D120US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2337.2	2337.2	2337.2	2337.2	2337.2
2.5°	2347.8	2337.2	2313.8	2335.1	2330.9
5°	2337.2	2326.7	2299.0	2318.2	2311.9
7.5°	2318.2	2305.5	2275.9	2284.2	2273.7
10°	2292.7	2277.9	2235.8	2229.3	2216.7
12.5°	2261.2	2242.0	2184.8	2172.3	2148.9
15°	2223.0	2199.6	2127.8	2087.6	2066.5
17.5°	2178.6	2144.7	2055.8	2009.3	1975.5
20°	2127.8	2085.4	1979.7	1926.9	1880.3
22.5°	2072.8	2024.1	1901.4	1829.6	1797.9
25°	2017.9	1950.1	1810.5	1723.9	1692.1
27.5°	1952.4	1880.3	1725.9	1626.5	1577.8
30°	1882.5	1802.0	1632.8	1525.1	1467.8
32.5°	1814.8	1717.4	1544.2	1417.1	1364.2
35°	1738.7	1630.8	1444.8	1311.4	1264.7
37.5°	1664.6	1548.2	1351.6	1205.6	1152.8
40°	1586.3	1459.6	1254.2	1104.0	1049.1
42.5°	1506.0	1370.7	1157.0	1000.4	947.7
45°	1421.4	1279.5	1057.7	907.3	856.5
47.5°	1341.1	1190.9	962.5	812.2	765.7
50°	1252.2	1102.1	869.4	723.3	679.1
52.5°	1165.3	1006.7	780.5	640.9	600.7
55°	1080.8	915.8	687.4	560.6	520.4
57.5°	994.1	824.9	605.0	486.5	452.6
60°	905.3	736.1	518.2	410.5	376.5
62.5°	818.7	649.5	444.1	342.7	325.8
65°	729.8	558.3	368.0	296.2	289.7
67.5°	645.1	473.7	296.2	260.1	253.8
70°	556.3	391.3	245.2	224.2	215.6
72.5°	471.7	315.1	205.1	188.3	184.0
75°	389.2	241.0	169.2	154.4	152.4
77.5°	306.8	171.3	133.3	124.8	120.5
80°	230.4	122.7	101.4	93.1	93.1
82.5°	160.7	82.6	69.7	65.5	65.5
85°	90.9	46.5	40.2	40.2	40.2
87.5°	33.9	16.9	16.9	14.8	14.8
90°	2.6	33.1	55.1	69.2	74.5
92.5°	69.2	58.1	66.3	71.8	74.5
95°	179.4	88.2	107.5	121.7	118.8
97.5°	323.1	96.8	140.7	149.2	151.8
100°	489.0	110.6	157.4	179.4	185.0
102.5°	671.1	665.8	163.0	193.2	201.7
105°	839.6	922.6	168.6	198.8	209.9
107.5°	1035.7	1104.6	174.2	204.3	215.5
110°	1223.6	1281.4	483.4	207.3	218.1

TEST NUMBER: P926978

CATALOG NUMBER: DFN2DIP-HX4F0-060D120US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1400.5	1449.9	1403.1	212.5	221.0
115°	1588.0	1635.0	1704.1	425.4	226.7
117.5°	1751.1	1806.2	1853.4	1458.1	734.7
120°	1933.4	1974.7	2024.6	2057.8	1684.8
122.5°	2087.9	2132.2	2187.6	2204.0	2207.0
125°	2245.3	2281.4	2333.9	2353.2	2361.4
127.5°	2389.0	2427.7	2469.4	2496.9	2499.5
130°	2524.4	2568.7	2598.8	2629.4	2626.7
132.5°	2662.5	2698.6	2728.7	2753.7	2751.1
135°	2778.6	2822.9	2847.5	2875.4	2869.8
137.5°	2900.0	2933.1	2961.0	2988.5	2980.3
140°	3018.7	3041.0	3071.1	3096.1	3082.4
142.5°	3118.4	3137.8	3173.5	3195.5	3181.7
145°	3223.4	3220.4	3267.3	3286.7	3272.8
147.5°	3314.2	3306.0	3352.9	3366.7	3355.9
150°	3402.7	3383.4	3427.7	3444.1	3430.3
152.5°	3477.2	3455.2	3496.6	3513.3	3493.9
155°	3549.0	3524.4	3557.6	3574.0	3552.0
157.5°	3607.0	3585.1	3610.1	3629.4	3607.0
160°	3656.9	3640.2	3656.9	3673.3	3654.0
162.5°	3700.9	3684.5	3698.3	3717.6	3692.7
165°	3739.6	3723.2	3731.4	3750.8	3731.4
167.5°	3770.1	3753.3	3761.9	3781.2	3756.3
170°	3795.0	3778.3	3783.9	3803.2	3778.3
172.5°	3811.4	3795.0	3800.6	3820.0	3795.0
175°	3825.1	3805.8	3811.4	3830.8	3803.2
177.5°	3830.8	3811.4	3814.4	3833.7	3808.8
180°	3817.0	3817.0	3817.0	3817.0	3817.0

TEST NUMBER: P926978

CATALOG NUMBER: DFN2DIP-HX4F0-060D120US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.85	7.54	7.96	8.64	10.18	2.82	3.51	3.94	4.62	6.15
	3H	8.51	9.13	9.64	10.25	11.80	4.00	4.62	5.12	5.73	7.28
	4H	9.12	9.70	10.25	10.82	12.37	4.44	5.03	5.58	6.15	7.70
	6H	9.53	10.07	10.67	11.19	12.75	4.76	5.30	5.90	6.42	7.98
	8H	9.66	10.17	10.80	11.30	12.86	4.85	5.36	5.99	6.49	8.05
	12H	9.71	10.20	10.86	11.33	12.91	4.89	5.37	6.04	6.50	8.08
4H	2H	6.85	7.43	7.99	8.55	10.10	3.40	3.98	4.54	5.10	6.65
	3H	8.67	9.15	9.81	10.30	11.86	4.74	5.22	5.88	6.37	7.93
	4H	9.35	9.80	10.50	10.93	12.52	5.28	5.73	6.43	6.86	8.45
	6H	9.86	10.24	11.02	11.40	12.98	5.70	6.08	6.85	7.23	8.81
	8H	10.03	10.39	11.19	11.54	13.13	5.82	6.18	6.98	7.33	8.92
	12H	10.12	10.45	11.29	11.60	13.20	5.88	6.21	7.05	7.36	8.96
8H	4H	9.31	9.67	10.47	10.81	12.41	5.55	5.91	6.71	7.06	8.65
	6H	9.87	10.17	11.05	11.36	12.95	6.07	6.36	7.24	7.55	9.14
	8H	10.09	10.35	11.27	11.51	13.12	6.26	6.52	7.44	7.68	9.29
	12H	10.22	10.45	11.41	11.61	13.26	6.37	6.60	7.56	7.76	9.41
12H	4H	9.26	9.58	10.43	10.74	12.33	5.55	5.87	6.72	7.03	8.63
	6H	9.85	10.11	11.03	11.27	12.88	6.12	6.37	7.30	7.54	9.15
	8H	10.06	10.29	11.25	11.45	13.10	6.32	6.55	7.51	7.71	9.36