

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P927011

Luminaire Tested: DFN2DIP-HX4F0-070D120US830-FLLFLL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P927011
REPORT IS A COMBINATION OF REPORTS P899449 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-070D120US830-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16540.9 lumens
Efficiency: N/A
Efficacy: 102.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 162.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P927011

CATALOG NUMBER: DFN2DIP-HX4F0-070D120US830-FLLFLL

Luminous Intensity Polar Plot

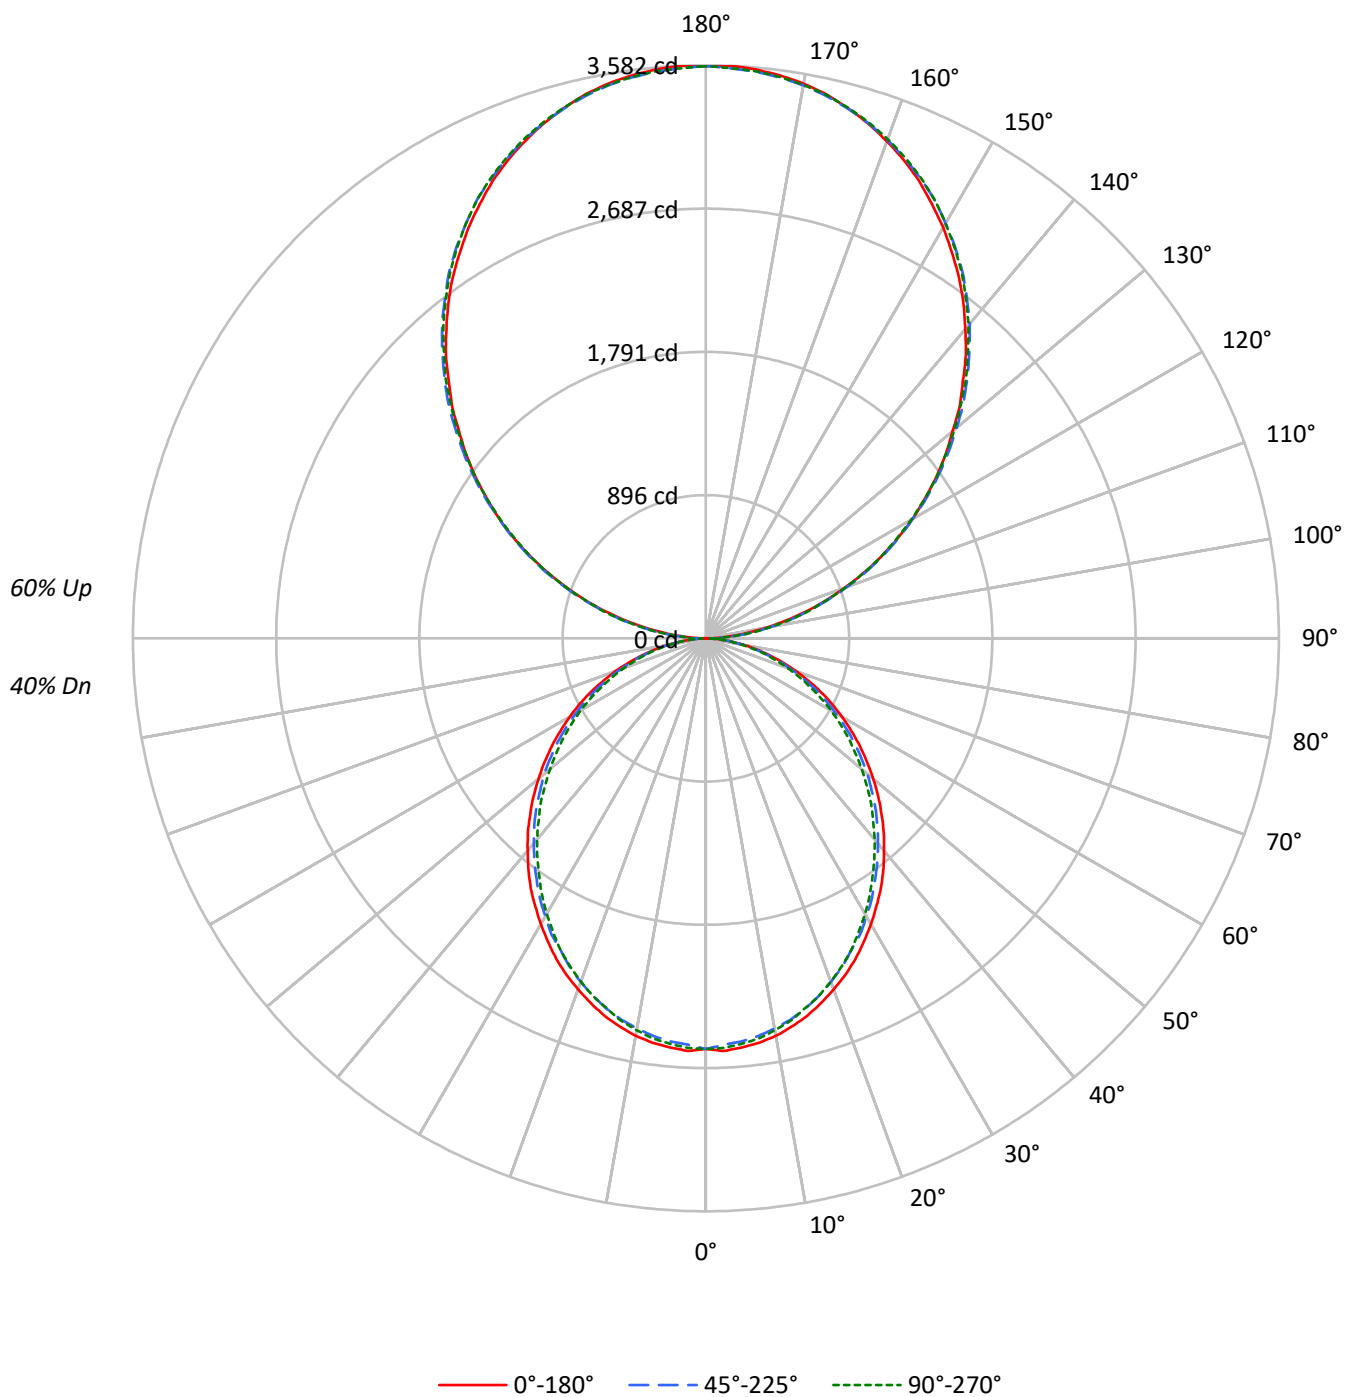

TEST NUMBER: P927011

CATALOG NUMBER: DFN2DIP-HX4F0-070D120US830-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	78	78	78	61	61	61	47	47	47
1	95	91	87	84	87	83	80	77	68	66	64	54	52	51	41	40	39
2	87	80	74	68	79	73	67	63	59	56	53	47	45	43	36	35	33
3	79	70	63	57	72	64	58	53	52	48	44	42	39	36	32	30	28
4	72	62	54	48	66	57	50	45	47	42	38	37	34	31	29	26	24
5	66	55	47	41	60	50	43	38	42	36	32	33	30	27	26	23	21
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	21	19
7	56	44	37	31	51	41	34	29	34	29	25	27	24	21	21	19	16
8	52	40	33	27	48	37	30	26	31	26	22	25	21	18	20	17	15
9	49	37	29	24	44	34	27	23	28	23	20	23	19	16	18	15	13
10	45	34	27	22	41	31	25	20	26	21	18	21	17	15	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1909	1909	1909
5°	1912	1882	1895
10°	1897	1857	1869
15°	1869	1827	1829
20°	1831	1785	1789
25°	1794	1734	1741
30°	1747	1687	1681
35°	1703	1631	1617
40°	1648	1575	1557
45°	1594	1519	1494
50°	1534	1460	1423
55°	1472	1392	1357
60°	1402	1311	1281
65°	1325	1227	1192
70°	1227	1124	1096
75°	1091	1002	1008
80°	928	846	838
85°	674	577	557

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2696 cd/sqm

TEST NUMBER: P927011

CATALOG NUMBER: DFN2DIP-HX4F0-070D120US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	241.6	1.5
10°-20°	679.8	4.1
20°-30°	999.1	6.0
30°-40°	1160.4	7.0
40°-50°	1158.9	7.0
50°-60°	1010.5	6.1
60°-70°	747.0	4.5
70°-80°	422.7	2.6
80°-90°	121.7	0.7
90°-100°	221.3	1.3
100°-110°	703.3	4.3
110°-120°	1203.5	7.3
120°-130°	1582.8	9.6
130°-140°	1776.6	10.7
140°-150°	1742.2	10.5
150°-160°	1461.5	8.8
160°-170°	969.2	5.9
170°-180°	338.8	2.0
0°-30°	1920.5	11.6
0°-40°	3080.9	18.6
0°-60°	5250.3	31.7
0°-90°	6541.7	39.5
90°-120°	2128.1	12.9
90°-150°	7229.8	43.7
90°-180°	9999.0	60.5
0°-180°	16540.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2567	2567	2567	2567	2567	
5°	2567	2558	2530	2550	2545	244
15°	2444	2429	2397	2407	2394	688
25°	2212	2192	2150	2155	2150	1018
35°	1908	1884	1844	1829	1817	1192
45°	1553	1536	1498	1471	1461	1198
55°	1175	1160	1131	1101	1089	1051
65°	792	778	753	731	718	784
75°	415	410	397	383	388	443
85°	101	99	96	89	86	113
90°	3	39	106	99	102	16
95°	157	188	193	193	188	175
105°	649	658	664	670	670	685
115°	1208	1225	1220	1216	1208	1195
125°	1757	1784	1775	1765	1762	1570
135°	2272	2306	2312	2309	2300	1756
145°	2758	2780	2797	2800	2789	1724
155°	3154	3163	3172	3188	3178	1452
165°	3431	3428	3428	3450	3435	968
175°	3570	3562	3555	3577	3559	339
180°	3577	3577	3577	3577	3577	

TEST NUMBER: P927011

CATALOG NUMBER: DFN2DIP-HX4F0-070D120US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2567.1	2567.1	2567.1	2567.1	2567.1
2.5°	2582.1	2569.7	2542.5	2567.1	2562.4
5°	2567.1	2557.5	2530.2	2549.8	2545.1
7.5°	2549.8	2535.1	2507.9	2527.9	2522.9
10°	2522.9	2505.5	2475.9	2495.6	2488.3
12.5°	2485.7	2471.0	2441.5	2453.7	2448.7
15°	2443.8	2429.1	2396.9	2406.9	2394.5
17.5°	2391.9	2377.3	2345.0	2357.4	2345.0
20°	2335.0	2320.4	2285.8	2293.2	2283.5
22.5°	2278.5	2256.3	2224.0	2224.0	2219.0
25°	2211.8	2192.1	2150.2	2154.9	2150.2
27.5°	2137.6	2120.3	2088.4	2081.0	2068.7
30°	2063.8	2043.8	2007.0	1999.6	1989.6
32.5°	1984.6	1970.0	1930.4	1915.5	1905.5
35°	1908.2	1883.6	1844.0	1829.1	1816.8
37.5°	1821.8	1799.5	1759.9	1742.7	1730.3
40°	1733.0	1713.1	1673.5	1651.5	1641.6
42.5°	1646.5	1626.7	1587.4	1562.5	1547.8
45°	1552.8	1535.5	1498.3	1471.3	1461.3
47.5°	1461.3	1444.1	1404.5	1377.3	1362.7
50°	1365.0	1352.7	1318.1	1283.6	1271.2
52.5°	1271.2	1254.0	1222.0	1194.8	1177.5
55°	1175.1	1160.2	1130.6	1101.0	1088.7
57.5°	1078.8	1066.4	1034.2	1004.6	994.7
60°	982.4	972.7	938.2	910.9	903.6
62.5°	888.6	871.3	846.7	822.1	812.2
65°	792.5	777.6	753.0	730.7	718.4
67.5°	693.8	681.2	659.2	641.9	631.9
70°	602.4	592.5	570.1	552.9	543.2
72.5°	508.6	498.7	486.3	469.1	461.7
75°	414.6	409.9	397.3	382.7	387.7
77.5°	330.8	320.8	315.8	308.5	301.2
80°	246.9	244.4	239.4	232.0	227.0
82.5°	167.9	167.9	165.5	155.6	155.6
85°	101.1	98.8	96.4	88.8	86.4
87.5°	44.5	39.6	34.6	27.2	24.6
90°	3.2	38.8	105.7	99.2	102.4
92.5°	66.8	90.6	93.8	97.1	97.1
95°	157.4	187.7	193.0	193.0	187.7
97.5°	262.0	290.1	302.0	302.0	302.0
100°	382.8	407.6	416.2	416.2	413.0
102.5°	510.1	528.4	540.2	543.5	540.2
105°	649.2	657.8	664.3	669.6	669.6
107.5°	787.2	800.2	800.2	802.3	787.2
110°	920.9	938.2	938.2	938.2	929.6

TEST NUMBER: P927011

CATALOG NUMBER: DFN2DIP-HX4F0-070D120US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1065.4	1083.8	1080.5	1071.9	1065.4
115°	1207.7	1225.1	1219.6	1216.4	1207.7
117.5°	1349.0	1372.8	1357.7	1349.0	1340.4
120°	1491.4	1515.1	1491.4	1491.4	1481.7
122.5°	1620.8	1651.0	1635.9	1627.2	1620.8
125°	1756.6	1783.6	1775.0	1765.3	1762.0
127.5°	1889.3	1922.7	1910.8	1897.9	1889.3
130°	2013.3	2052.1	2046.7	2040.2	2028.4
132.5°	2152.4	2182.6	2184.7	2169.6	2161.1
135°	2272.1	2305.5	2312.0	2308.7	2300.2
137.5°	2405.8	2432.8	2438.2	2436.0	2423.1
140°	2523.4	2550.3	2565.4	2565.4	2553.5
142.5°	2644.2	2671.1	2679.7	2682.9	2671.1
145°	2758.4	2780.0	2797.2	2800.5	2788.7
147.5°	2860.9	2887.8	2900.8	2906.2	2894.3
150°	2966.6	2984.9	2996.8	3006.5	2996.8
152.5°	3060.4	3078.7	3093.9	3105.7	3093.9
155°	3154.2	3162.8	3172.5	3187.6	3177.9
157.5°	3235.1	3241.5	3246.9	3268.5	3253.4
160°	3307.3	3313.8	3317.0	3335.4	3322.4
162.5°	3374.2	3374.2	3377.4	3397.9	3382.8
165°	3431.4	3428.2	3428.2	3449.6	3434.6
167.5°	3483.1	3473.4	3473.4	3495.0	3479.9
170°	3521.9	3513.3	3510.1	3531.6	3513.3
172.5°	3548.9	3540.2	3537.0	3558.6	3540.2
175°	3570.5	3561.8	3555.4	3576.9	3558.6
177.5°	3582.3	3573.7	3567.2	3585.6	3567.2
180°	3576.9	3576.9	3576.9	3576.9	3576.9

TEST NUMBER: P927011

CATALOG NUMBER: DFN2DIP-HX4F0-070D120US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.47	9.24	9.51	10.29	11.70	8.03	8.81	9.08	9.86	11.27
	3H	10.12	10.82	11.17	11.87	13.30	9.65	10.34	10.70	11.40	12.83
	4H	10.70	11.36	11.77	12.42	13.86	10.23	10.89	11.29	11.95	13.39
	6H	11.10	11.71	12.17	12.77	14.22	10.63	11.23	11.70	12.29	13.74
	8H	11.20	11.78	12.28	12.86	14.30	10.73	11.31	11.81	12.38	13.83
	12H	11.25	11.80	12.33	12.87	14.34	10.77	11.32	11.85	12.39	13.86
4H	2H	8.92	9.58	9.99	10.63	12.07	8.57	9.23	9.64	10.29	11.73
	3H	10.78	11.33	11.85	12.41	13.86	10.38	10.93	11.46	12.02	13.47
	4H	11.49	11.99	12.57	13.07	14.54	11.08	11.59	12.17	12.66	14.14
	6H	12.00	12.43	13.09	13.53	15.00	11.59	12.02	12.68	13.12	14.59
	8H	12.15	12.55	13.24	13.64	15.13	11.74	12.14	12.83	13.23	14.71
	12H	12.22	12.58	13.33	13.69	15.18	11.79	12.16	12.90	13.27	14.75
8H	4H	11.68	12.08	12.77	13.17	14.66	11.32	11.72	12.41	12.81	14.30
	6H	12.31	12.64	13.42	13.78	15.26	11.94	12.28	13.06	13.41	14.89
	8H	12.53	12.82	13.65	13.94	15.44	12.16	12.45	13.28	13.57	15.07
	12H	12.66	12.91	13.78	14.03	15.56	12.27	12.53	13.40	13.64	15.18
12H	4H	11.66	12.03	12.77	13.13	14.62	11.31	11.67	12.42	12.78	14.27
	6H	12.34	12.63	13.46	13.75	15.25	11.99	12.28	13.11	13.39	14.89
	8H	12.58	12.83	13.70	13.95	15.48	12.22	12.48	13.34	13.59	15.12