

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P927019

Luminaire Tested: DFN2DIP-HX4F0-080D050US830-FLLFLL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P927019
REPORT IS A COMBINATION OF REPORTS P899325 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-080D050US830-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11635.2 lumens
Efficiency: N/A
Efficacy: 101.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 114.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P927019

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US830-FLLFLL

Luminous Intensity Polar Plot

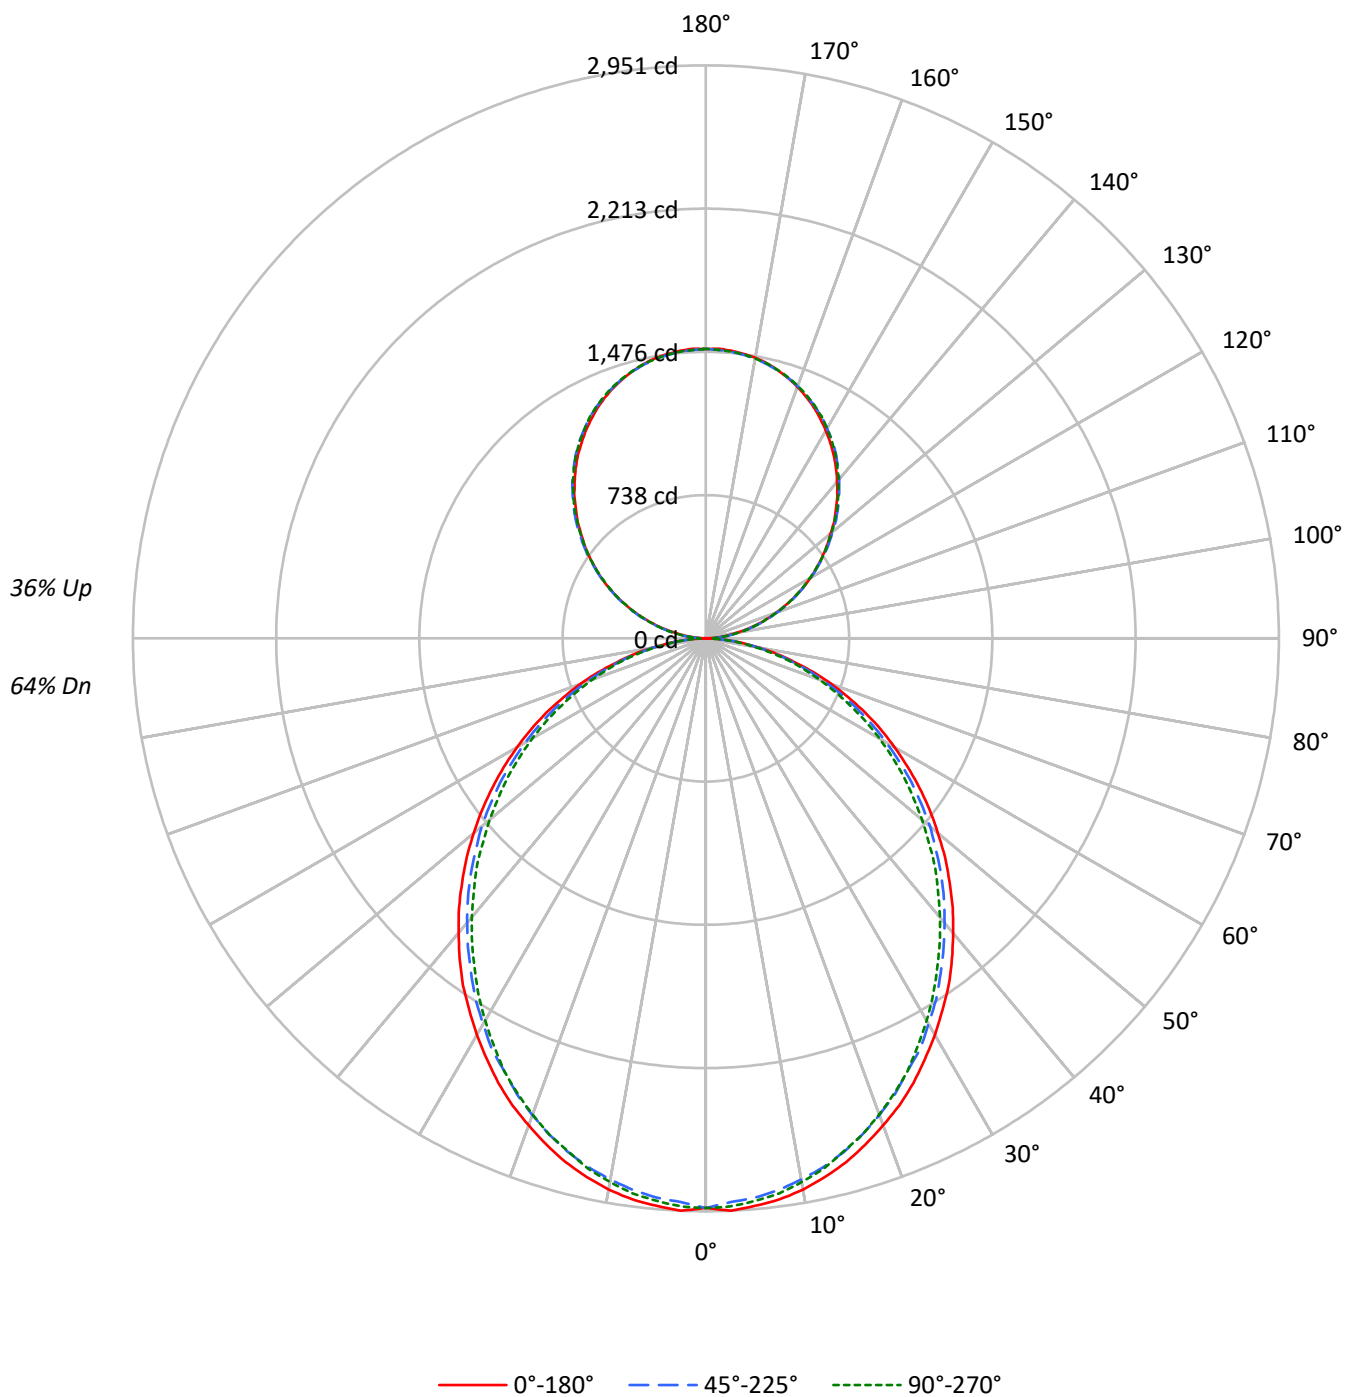

TEST NUMBER: P927019

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US830-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	69	69	69
1	101	97	93	89	95	91	87	84	80	77	75	70	68	66	61	60	58
2	92	84	78	73	86	79	74	69	70	66	62	62	58	56	54	51	49
3	84	74	67	61	79	70	63	58	62	57	52	55	50	47	48	45	42
4	77	66	58	51	72	62	55	49	55	49	45	49	44	40	43	39	36
5	71	59	50	44	66	55	48	42	49	43	39	44	39	35	38	35	32
6	65	53	44	38	61	50	42	37	45	38	34	40	35	31	35	31	28
7	60	48	40	34	56	45	38	32	40	34	30	36	31	27	32	28	25
8	56	43	35	30	53	41	34	29	37	31	27	33	28	24	29	25	22
9	52	40	32	27	49	38	31	26	34	28	24	30	26	22	27	23	20
10	49	37	29	24	46	35	28	23	31	26	22	28	23	20	25	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2181	2181	2181
5°	2185	2151	2166
10°	2168	2123	2137
15°	2136	2088	2091
20°	2093	2039	2044
25°	2050	1982	1990
30°	1997	1928	1921
35°	1946	1864	1848
40°	1884	1800	1779
45°	1822	1736	1708
50°	1753	1668	1626
55°	1682	1591	1550
60°	1602	1498	1464
65°	1514	1402	1362
70°	1402	1285	1252
75°	1247	1145	1151
80°	1062	967	958
85°	771	659	637

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1822 cd/sqm

TEST NUMBER: P927019

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.1	2.4
10°-20°	776.9	6.7
20°-30°	1141.8	9.8
30°-40°	1326.1	11.4
40°-50°	1324.5	11.4
50°-60°	1154.9	9.9
60°-70°	853.7	7.3
70°-80°	483.0	4.2
80°-90°	131.7	1.1
90°-100°	92.2	0.8
100°-110°	293.0	2.5
110°-120°	501.5	4.3
120°-130°	659.5	5.7
130°-140°	740.3	6.4
140°-150°	725.9	6.2
150°-160°	608.9	5.2
160°-170°	403.8	3.5
170°-180°	141.2	1.2
0°-30°	2194.9	18.9
0°-40°	3521.0	30.3
0°-60°	6000.4	51.6
0°-90°	7468.9	64.2
90°-120°	886.7	7.6
90°-150°	3012.4	25.9
90°-180°	4166.0	35.8
0°-180°	11635.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2934	2934	2934	2934	2934	
5°	2934	2923	2892	2914	2909	278
15°	2793	2776	2739	2751	2737	787
25°	2528	2505	2457	2463	2457	1163
35°	2181	2153	2107	2090	2076	1362
45°	1775	1755	1712	1682	1670	1370
55°	1343	1326	1292	1258	1244	1201
65°	906	889	860	835	821	895
75°	474	468	454	437	443	506
85°	116	113	110	102	99	129
90°	1	16	44	41	43	11
95°	66	78	80	80	78	73
105°	270	274	277	279	279	285
115°	503	510	508	507	503	498
125°	732	743	740	736	734	654
135°	947	961	963	962	958	732
145°	1149	1158	1166	1167	1162	718
155°	1314	1318	1322	1328	1324	605
165°	1430	1428	1428	1437	1431	403
175°	1488	1484	1481	1490	1483	141
180°	1490	1490	1490	1490	1490	

TEST NUMBER: P927019

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2933.8	2933.8	2933.8	2933.8	2933.8
2.5°	2950.9	2936.8	2905.7	2933.8	2928.4
5°	2933.8	2922.8	2891.7	2914.1	2908.7
7.5°	2914.1	2897.3	2866.2	2889.0	2883.3
10°	2883.3	2863.5	2829.7	2852.1	2843.8
12.5°	2840.8	2824.0	2790.2	2804.2	2798.6
15°	2792.9	2776.1	2739.3	2750.7	2736.6
17.5°	2733.6	2716.9	2680.0	2694.1	2680.0
20°	2668.7	2651.9	2612.4	2620.8	2609.7
22.5°	2604.0	2578.6	2541.7	2541.7	2536.1
25°	2527.7	2505.3	2457.4	2462.8	2457.4
27.5°	2443.0	2423.3	2386.7	2378.3	2364.3
30°	2358.6	2335.8	2293.7	2285.3	2273.9
32.5°	2268.2	2251.4	2206.2	2189.1	2177.8
35°	2180.8	2152.7	2107.4	2090.4	2076.3
37.5°	2082.0	2056.5	2011.4	1991.6	1977.6
40°	1980.6	1957.8	1912.6	1887.5	1876.0
42.5°	1881.8	1859.0	1814.1	1785.7	1769.0
45°	1774.6	1754.8	1712.3	1681.5	1670.2
47.5°	1670.2	1650.4	1605.2	1574.1	1557.3
50°	1560.0	1546.0	1506.4	1466.9	1452.9
52.5°	1452.9	1433.1	1396.6	1365.5	1345.7
55°	1343.0	1325.9	1292.2	1258.3	1244.2
57.5°	1232.9	1218.8	1182.0	1148.2	1136.7
60°	1122.7	1111.7	1072.1	1041.0	1032.6
62.5°	1015.5	995.8	967.7	939.6	928.2
65°	905.7	888.7	860.5	835.1	821.0
67.5°	792.8	778.5	753.3	733.6	722.2
70°	688.4	677.0	651.6	631.9	620.7
72.5°	581.2	569.9	555.8	536.1	527.7
75°	473.8	468.4	454.1	437.3	443.0
77.5°	378.0	366.6	361.0	352.6	344.2
80°	282.3	279.3	273.6	265.2	259.5
82.5°	191.9	191.9	189.2	177.8	177.8
85°	115.6	112.8	110.2	101.5	98.8
87.5°	50.9	45.2	39.5	31.1	28.2
90°	1.3	16.2	44.0	41.4	42.7
92.5°	27.9	37.7	39.1	40.4	40.4
95°	65.6	78.2	80.4	80.4	78.2
97.5°	109.1	120.8	125.8	125.8	125.8
100°	159.5	169.8	173.4	173.4	172.1
102.5°	212.5	220.2	225.1	226.5	225.1
105°	270.5	274.1	276.8	279.0	279.0
107.5°	328.0	333.4	333.4	334.3	328.0
110°	383.7	390.9	390.9	390.9	387.3

TEST NUMBER: P927019

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	443.9	451.6	450.2	446.7	443.9
115°	503.2	510.5	508.2	506.9	503.2
117.5°	562.1	572.0	565.7	562.1	558.5
120°	621.4	631.3	621.4	621.4	617.3
122.5°	675.3	687.9	681.6	678.0	675.3
125°	731.9	743.2	739.6	735.5	734.2
127.5°	787.2	801.1	796.2	790.8	787.2
130°	838.9	855.0	852.8	850.1	845.1
132.5°	896.9	909.4	910.4	904.0	900.5
135°	946.7	960.6	963.3	962.0	958.4
137.5°	1002.4	1013.7	1015.9	1015.0	1009.6
140°	1051.4	1062.7	1068.9	1068.9	1064.0
142.5°	1101.7	1113.0	1116.6	1117.9	1113.0
145°	1149.4	1158.3	1165.5	1166.9	1161.9
147.5°	1192.1	1203.3	1208.7	1210.9	1205.9
150°	1236.1	1243.7	1248.6	1252.7	1248.6
152.5°	1275.2	1282.8	1289.1	1294.1	1289.1
155°	1314.2	1317.8	1321.9	1328.2	1324.1
157.5°	1348.0	1350.6	1352.9	1361.9	1355.6
160°	1378.0	1380.8	1382.1	1389.7	1384.3
162.5°	1405.9	1405.9	1407.2	1415.8	1409.5
165°	1429.8	1428.4	1428.4	1437.4	1431.1
167.5°	1451.3	1447.2	1447.2	1456.3	1449.9
170°	1467.5	1463.9	1462.6	1471.5	1463.9
172.5°	1478.7	1475.1	1473.8	1482.7	1475.1
175°	1487.7	1484.1	1481.4	1490.4	1482.7
177.5°	1492.6	1489.1	1486.3	1494.0	1486.3
180°	1490.4	1490.4	1490.4	1490.4	1490.4

TEST NUMBER: P927019

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.20	12.20	12.02	13.05	14.10	10.77	11.77	11.59	12.62	13.67
	3H	12.87	13.77	13.71	14.63	15.71	12.40	13.30	13.23	14.16	15.24
	4H	13.46	14.32	14.32	15.18	16.27	12.99	13.84	13.84	14.71	15.80
	6H	13.87	14.66	14.74	15.53	16.63	13.40	14.18	14.26	15.05	16.16
	8H	13.98	14.73	14.86	15.62	16.72	13.51	14.26	14.38	15.15	16.25
	12H	14.04	14.75	14.92	15.63	16.76	13.55	14.27	14.43	15.15	16.28
4H	2H	11.68	12.53	12.54	13.39	14.49	11.33	12.19	12.19	13.05	14.14
	3H	13.56	14.27	14.43	15.17	16.27	13.16	13.88	14.03	14.77	15.88
	4H	14.28	14.93	15.16	15.82	16.95	13.87	14.52	14.75	15.41	16.55
	6H	14.80	15.36	15.70	16.28	17.42	14.39	14.95	15.29	15.87	17.01
	8H	14.96	15.48	15.86	16.39	17.54	14.54	15.07	15.44	15.98	17.13
	12H	15.04	15.51	15.96	16.44	17.59	14.61	15.09	15.53	16.02	17.17
8H	4H	14.49	15.01	15.39	15.92	17.07	14.13	14.65	15.03	15.56	16.71
	6H	15.13	15.56	16.05	16.51	17.66	14.76	15.20	15.69	16.15	17.30
	8H	15.35	15.73	16.29	16.68	17.84	14.98	15.36	15.92	16.31	17.47
	12H	15.49	15.83	16.43	16.76	17.98	15.10	15.44	16.04	16.38	17.60
12H	4H	14.48	14.95	15.40	15.88	17.04	14.13	14.60	15.05	15.53	16.68
	6H	15.16	15.54	16.09	16.49	17.65	14.80	15.19	15.74	16.14	17.30
	8H	15.41	15.75	16.35	16.68	17.90	15.05	15.39	15.99	16.33	17.54