

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P927163

Luminaire Tested: DFN2DIP-HX4F0-120D050US830-FLLFLL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P927163
REPORT IS A COMBINATION OF REPORTS P899333 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-120D050US830-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 15367.4 lumens
Efficiency: N/A
Efficacy: 93.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 163.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P927163
CATALOG NUMBER: DFN2DIP-HX4F0-120D050US830-FLLFLL

Luminous Intensity Polar Plot

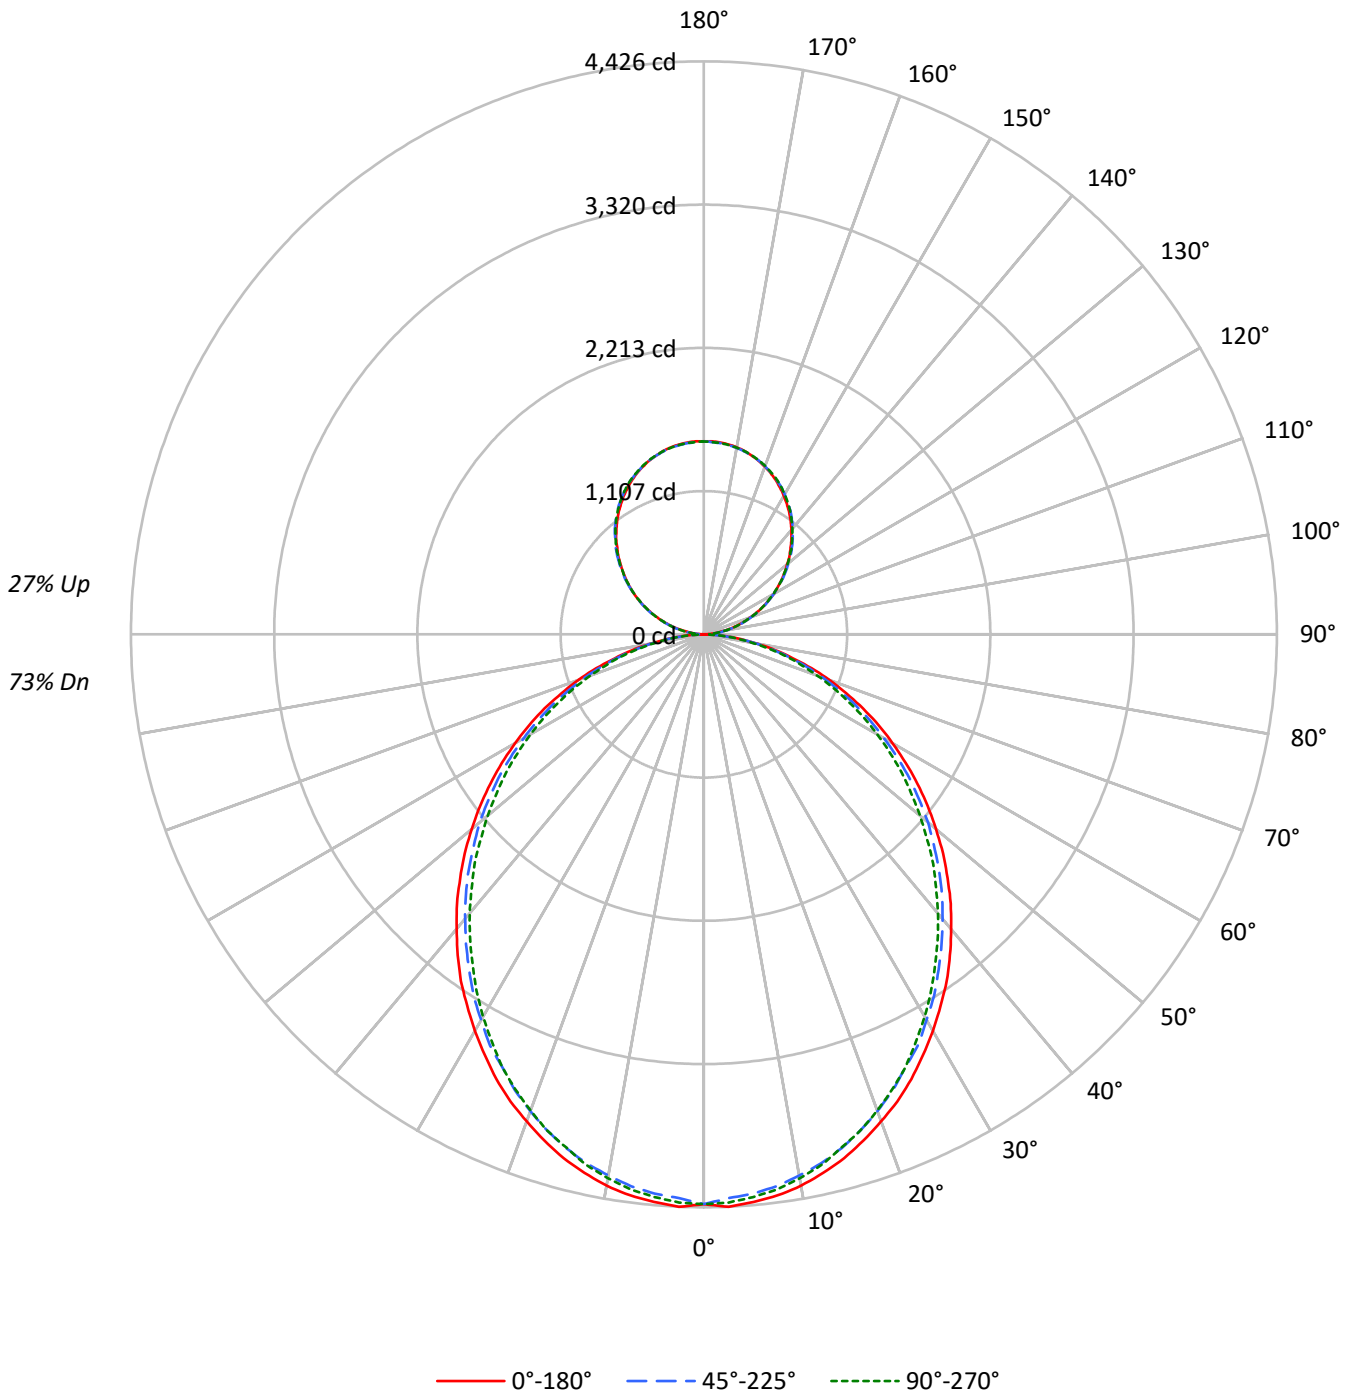



TEST NUMBER: P927163

CATALOG NUMBER: DFN2DIP-HX4F0-120D050US830-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	113	113	113	113	107	107	107	107	96	96	96	86	86	86	77	77	77	77	77	77	73
1	103	98	94	91	97	94	90	87	84	82	79	76	74	72	68	67	65	65	65	65	61
2	94	86	80	74	89	82	76	71	74	69	66	67	63	60	60	57	55	55	55	55	51
3	86	76	68	62	81	72	65	60	65	60	55	59	55	51	53	50	47	47	47	47	44
4	78	67	59	53	74	64	57	51	58	52	47	53	48	44	48	44	40	40	40	40	37
5	72	60	51	45	68	57	50	44	52	46	41	47	42	38	43	39	35	35	35	35	33
6	67	54	45	39	63	52	44	38	47	41	36	43	38	33	39	35	31	31	31	31	29
7	62	49	41	35	58	47	39	34	43	36	32	39	34	30	36	31	28	28	28	28	25
8	57	45	36	31	54	43	35	30	39	33	28	36	30	27	33	28	25	25	25	25	23
9	53	41	33	28	51	39	32	27	36	30	25	33	28	24	30	26	22	22	22	22	20
10	50	38	30	25	48	36	29	24	33	27	23	31	25	22	28	24	20	20	20	20	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3272	3272	3272
5°	3278	3227	3249
10°	3251	3184	3205
15°	3204	3132	3136
20°	3140	3059	3066
25°	3076	2972	2985
30°	2995	2892	2882
35°	2919	2796	2772
40°	2826	2700	2668
45°	2732	2604	2562
50°	2630	2503	2439
55°	2523	2386	2326
60°	2403	2247	2196
65°	2271	2103	2043
70°	2104	1928	1879
75°	1871	1718	1727
80°	1592	1451	1437
85°	1155	988	956

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2732 cd/sqm



TEST NUMBER: P927163

CATALOG NUMBER: DFN2DIP-HX4F0-120D050US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	414.2	2.7
10°-20°	1165.4	7.6
20°-30°	1712.7	11.1
30°-40°	1989.2	12.9
40°-50°	1986.7	12.9
50°-60°	1732.3	11.3
60°-70°	1280.6	8.3
70°-80°	724.5	4.7
80°-90°	195.5	1.3
90°-100°	92.2	0.6
100°-110°	293.0	1.9
110°-120°	501.5	3.3
120°-130°	659.5	4.3
130°-140°	740.3	4.8
140°-150°	725.9	4.7
150°-160°	608.9	4.0
160°-170°	403.8	2.6
170°-180°	141.2	0.9
0°-30°	3292.3	21.4
0°-40°	5281.5	34.4
0°-60°	9000.5	58.6
0°-90°	11201.1	72.9
90°-120°	886.7	5.8
90°-150°	3012.4	19.6
90°-180°	4166.0	27.1
0°-180°	15367.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4401	4401	4401	4401	4401	
5°	4401	4384	4338	4371	4363	418
15°	4189	4164	4109	4126	4105	1180
25°	3792	3758	3686	3694	3686	1745
35°	3271	3229	3161	3136	3114	2043
45°	2662	2632	2568	2522	2505	2054
55°	2014	1989	1938	1888	1866	1801
65°	1359	1333	1291	1253	1232	1343
75°	711	703	681	656	664	759
85°	173	169	165	152	148	193
90°	1	16	44	41	43	15
95°	66	78	80	80	78	73
105°	270	274	277	279	279	285
115°	503	510	508	507	503	498
125°	732	743	740	736	734	654
135°	947	961	963	962	958	732
145°	1149	1158	1166	1167	1162	718
155°	1314	1318	1322	1328	1324	605
165°	1430	1428	1428	1437	1431	403
175°	1488	1484	1481	1490	1483	141
180°	1490	1490	1490	1490	1490	



TEST NUMBER: P927163

CATALOG NUMBER: DFN2DIP-HX4F0-120D050US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4400.8	4400.8	4400.8	4400.8	4400.8
2.5°	4426.4	4405.2	4358.6	4400.8	4392.7
5°	4400.8	4384.1	4337.5	4371.1	4363.0
7.5°	4371.1	4346.0	4299.3	4333.4	4324.9
10°	4324.9	4295.3	4244.5	4278.2	4265.7
12.5°	4261.1	4236.0	4185.3	4206.4	4197.8
15°	4189.3	4164.2	4108.9	4126.0	4104.9
17.5°	4100.4	4075.3	4020.0	4041.2	4020.0
20°	4003.0	3977.8	3918.6	3931.2	3914.6
22.5°	3906.0	3867.8	3812.6	3812.6	3804.1
25°	3791.5	3757.8	3686.0	3694.1	3686.0
27.5°	3664.4	3634.8	3580.1	3567.5	3546.4
30°	3537.9	3503.7	3440.4	3427.9	3410.8
32.5°	3402.2	3377.2	3309.3	3283.8	3266.7
35°	3271.1	3229.0	3161.1	3135.6	3114.5
37.5°	3123.0	3084.9	3017.0	2987.4	2966.3
40°	2970.9	2936.7	2868.9	2831.2	2814.1
42.5°	2822.7	2788.6	2721.2	2678.6	2653.4
45°	2661.9	2632.3	2568.5	2522.3	2505.3
47.5°	2505.3	2475.6	2407.8	2361.2	2336.0
50°	2340.0	2318.9	2259.6	2200.4	2179.2
52.5°	2179.2	2149.7	2094.9	2048.1	2018.6
55°	2014.5	1989.0	1938.2	1887.5	1866.3
57.5°	1849.3	1828.2	1772.9	1722.2	1705.2
60°	1684.1	1667.5	1608.2	1561.5	1548.9
62.5°	1523.4	1493.7	1451.5	1409.3	1392.3
65°	1358.6	1333.0	1290.8	1252.6	1231.6
67.5°	1189.3	1167.8	1130.1	1100.5	1083.4
70°	1032.6	1015.5	977.4	947.8	931.2
72.5°	871.9	854.8	833.7	804.1	791.5
75°	710.7	702.6	681.1	656.0	664.5
77.5°	567.0	549.9	541.5	528.8	516.3
80°	423.4	418.8	410.4	397.8	389.3
82.5°	287.7	287.7	283.8	266.7	266.7
85°	173.3	169.3	165.2	152.2	148.2
87.5°	76.3	67.8	59.3	46.7	42.2
90°	1.3	16.2	44.0	41.4	42.7
92.5°	27.9	37.7	39.1	40.4	40.4
95°	65.6	78.2	80.4	80.4	78.2
97.5°	109.1	120.8	125.8	125.8	125.8
100°	159.5	169.8	173.4	173.4	172.1
102.5°	212.5	220.2	225.1	226.5	225.1
105°	270.5	274.1	276.8	279.0	279.0
107.5°	328.0	333.4	333.4	334.3	328.0
110°	383.7	390.9	390.9	390.9	387.3



TEST NUMBER: P927163

CATALOG NUMBER: DFN2DIP-HX4F0-120D050US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	443.9	451.6	450.2	446.7	443.9
115°	503.2	510.5	508.2	506.9	503.2
117.5°	562.1	572.0	565.7	562.1	558.5
120°	621.4	631.3	621.4	621.4	617.3
122.5°	675.3	687.9	681.6	678.0	675.3
125°	731.9	743.2	739.6	735.5	734.2
127.5°	787.2	801.1	796.2	790.8	787.2
130°	838.9	855.0	852.8	850.1	845.1
132.5°	896.9	909.4	910.4	904.0	900.5
135°	946.7	960.6	963.3	962.0	958.4
137.5°	1002.4	1013.7	1015.9	1015.0	1009.6
140°	1051.4	1062.7	1068.9	1068.9	1064.0
142.5°	1101.7	1113.0	1116.6	1117.9	1113.0
145°	1149.4	1158.3	1165.5	1166.9	1161.9
147.5°	1192.1	1203.3	1208.7	1210.9	1205.9
150°	1236.1	1243.7	1248.6	1252.7	1248.6
152.5°	1275.2	1282.8	1289.1	1294.1	1289.1
155°	1314.2	1317.8	1321.9	1328.2	1324.1
157.5°	1348.0	1350.6	1352.9	1361.9	1355.6
160°	1378.0	1380.8	1382.1	1389.7	1384.3
162.5°	1405.9	1405.9	1407.2	1415.8	1409.5
165°	1429.8	1428.4	1428.4	1437.4	1431.1
167.5°	1451.3	1447.2	1447.2	1456.3	1449.9
170°	1467.5	1463.9	1462.6	1471.5	1463.9
172.5°	1478.7	1475.1	1473.8	1482.7	1475.1
175°	1487.7	1484.1	1481.4	1490.4	1482.7
177.5°	1492.6	1489.1	1486.3	1494.0	1486.3
180°	1490.4	1490.4	1490.4	1490.4	1490.4



TEST NUMBER: P927163
 CATALOG NUMBER: DFN2DIP-HX4F0-120D050US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.28	14.39	14.01	15.15	16.05	12.85	13.96	13.58	14.71	15.62
	3H	14.96	15.96	15.70	16.72	17.66	14.49	15.49	15.23	16.25	17.18
	4H	15.56	16.50	16.32	17.28	18.22	15.08	16.03	15.85	16.80	17.75
	6H	15.97	16.84	16.75	17.62	18.58	15.50	16.37	16.27	17.15	18.11
	8H	16.08	16.91	16.87	17.72	18.68	15.61	16.44	16.40	17.24	18.20
	12H	16.14	16.93	16.93	17.73	18.72	15.66	16.45	16.45	17.25	18.23
4H	2H	13.77	14.72	14.54	15.49	16.43	13.43	14.37	14.19	15.14	16.09
	3H	15.66	16.45	16.44	17.26	18.22	15.27	16.06	16.05	16.86	17.83
	4H	16.39	17.10	17.18	17.91	18.90	15.98	16.70	16.77	17.51	18.50
	6H	16.92	17.54	17.73	18.37	19.37	16.51	17.13	17.32	17.96	18.96
	8H	17.07	17.65	17.89	18.48	19.49	16.66	17.24	17.48	18.07	19.08
	12H	17.16	17.68	17.99	18.53	19.54	16.74	17.26	17.57	18.11	19.12
8H	4H	16.60	17.18	17.42	18.01	19.02	16.24	16.82	17.06	17.65	18.66
	6H	17.25	17.73	18.09	18.60	19.61	16.88	17.36	17.73	18.23	19.24
	8H	17.47	17.90	18.33	18.76	19.79	17.10	17.53	17.96	18.40	19.42
	12H	17.61	17.99	18.47	18.85	19.93	17.23	17.61	18.09	18.46	19.55
12H	4H	16.60	17.12	17.44	17.97	18.99	16.25	16.77	17.09	17.62	18.64
	6H	17.28	17.71	18.13	18.57	19.60	16.93	17.36	17.78	18.22	19.25
	8H	17.53	17.91	18.39	18.77	19.85	17.18	17.55	18.03	18.41	19.49