

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905428

Luminaire Tested: DFN2DIP-HX4F0-040D110US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905428
REPORT IS A COMBINATION OF REPORTS P899425 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-040D110US835-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13695.0 lumens
Efficiency: N/A
Efficacy: 139.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 98.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905428

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLFLL

Luminous Intensity Polar Plot

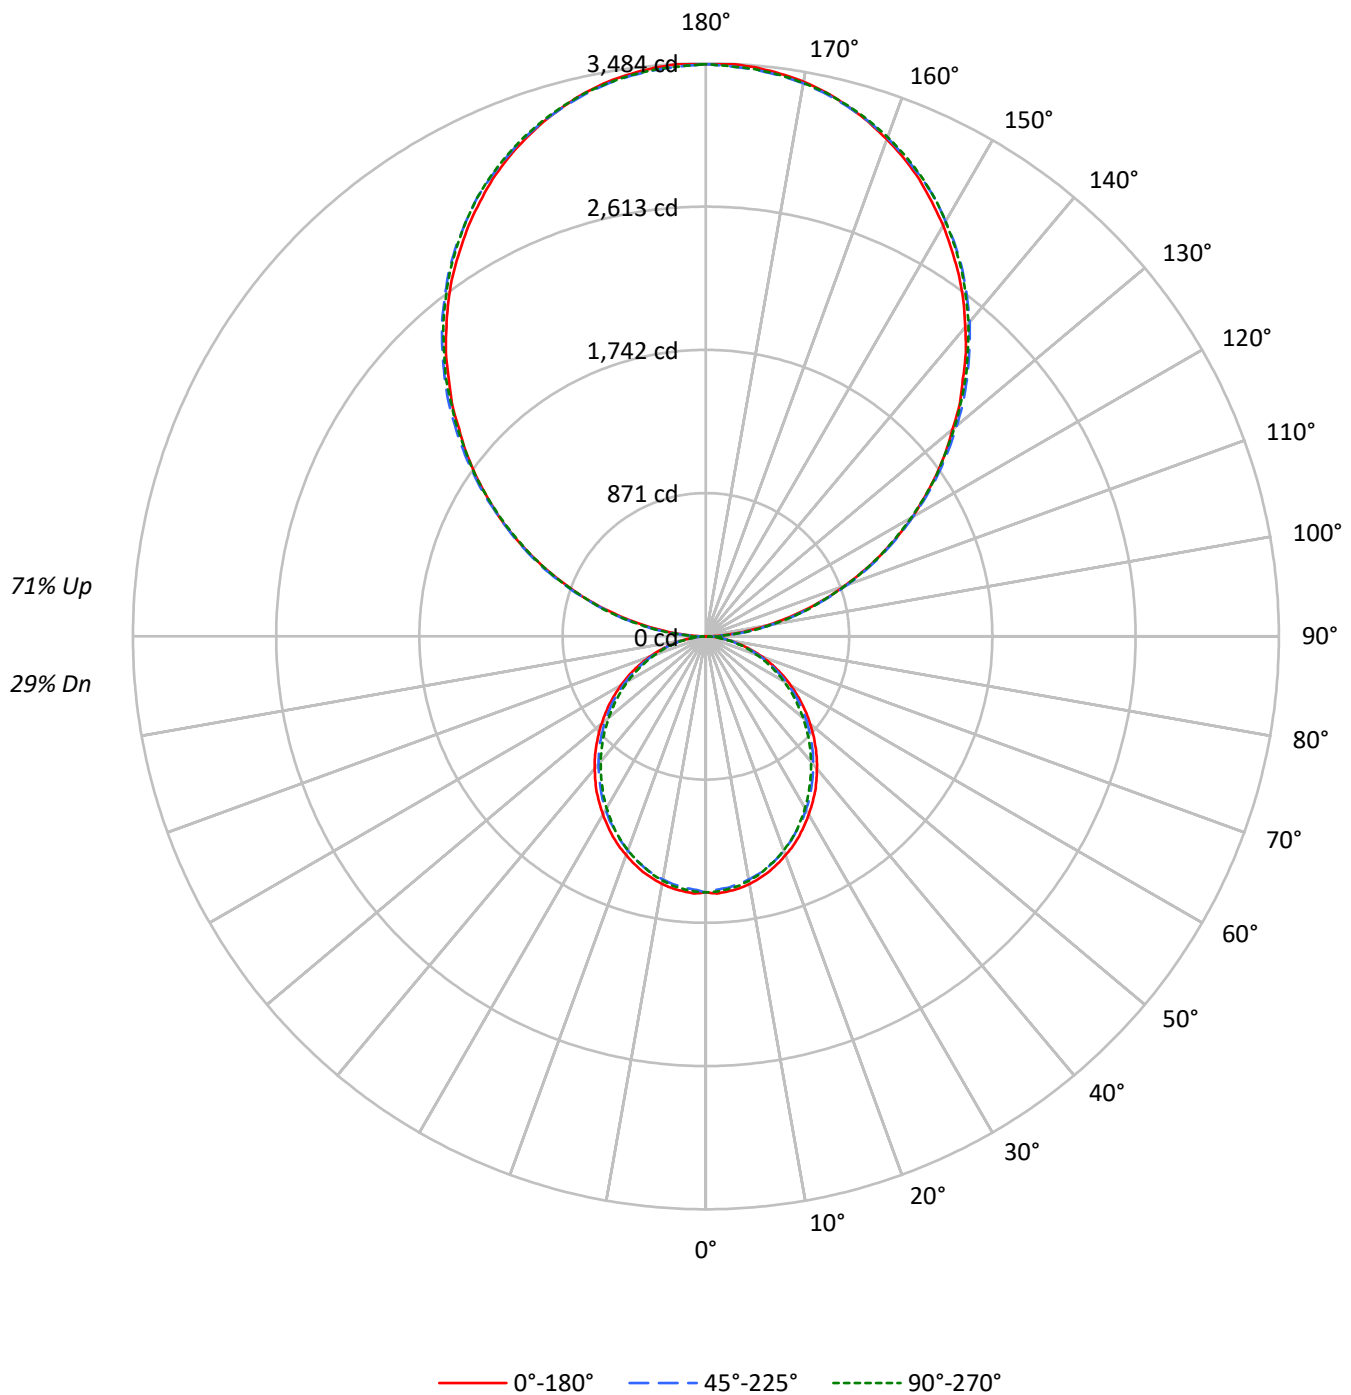

TEST NUMBER: P905428

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	37	37	37
1	93	89	85	82	83	80	77	74	63	61	59	47	46	44	32	32	31
2	85	78	72	67	76	70	65	60	55	51	48	41	39	37	29	27	26
3	77	68	61	55	69	61	55	50	48	44	41	36	34	31	25	24	22
4	71	60	53	47	63	54	48	43	43	38	35	32	29	27	23	21	19
5	65	53	46	40	58	48	41	36	38	33	30	29	26	23	20	18	17
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	15
7	55	43	35	30	49	39	32	27	31	26	23	24	20	18	17	15	13
8	51	39	31	26	45	35	29	24	28	23	20	22	18	16	15	13	12
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10
10	44	32	25	21	39	29	23	19	24	19	16	18	15	13	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1157	1157	1157
5°	1159	1141	1149
10°	1150	1126	1133
15°	1133	1108	1109
20°	1110	1082	1084
25°	1088	1051	1056
30°	1059	1023	1019
35°	1032	989	980
40°	999	955	944
45°	966	921	906
50°	930	885	863
55°	892	844	823
60°	850	795	777
65°	803	744	723
70°	744	682	664
75°	662	608	611
80°	563	513	508
85°	409	349	338

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2622 cd/sqm

TEST NUMBER: P905428

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.5	1.1
10°-20°	412.2	3.0
20°-30°	605.7	4.4
30°-40°	703.5	5.1
40°-50°	702.6	5.1
50°-60°	612.7	4.5
60°-70°	452.9	3.3
70°-80°	256.2	1.9
80°-90°	77.5	0.6
90°-100°	215.3	1.6
100°-110°	684.0	5.0
110°-120°	1170.5	8.5
120°-130°	1539.4	11.2
130°-140°	1727.9	12.6
140°-150°	1694.4	12.4
150°-160°	1421.4	10.4
160°-170°	942.6	6.9
170°-180°	329.5	2.4
0°-30°	1164.4	8.5
0°-40°	1867.9	13.6
0°-60°	3183.2	23.2
0°-90°	3969.9	29.0
90°-120°	2069.8	15.1
90°-150°	7031.6	51.3
90°-180°	9725.0	71.0
0°-180°	13695.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1556	1556	1556	1556	1556	
5°	1556	1550	1534	1546	1543	148
15°	1482	1473	1453	1459	1452	417
25°	1341	1329	1304	1306	1304	617
35°	1157	1142	1118	1109	1102	722
45°	941	931	908	892	886	727
55°	712	703	686	668	660	637
65°	480	471	456	443	436	475
75°	251	248	241	232	235	268
85°	61	60	58	54	52	68
90°	3	38	103	96	100	13
95°	153	182	188	188	182	170
105°	631	640	646	651	651	666
115°	1175	1191	1186	1183	1175	1162
125°	1708	1735	1726	1717	1714	1527
135°	2210	2242	2249	2246	2237	1708
145°	2683	2704	2721	2724	2712	1676
155°	3068	3076	3086	3100	3091	1412
165°	3337	3334	3334	3355	3340	941
175°	3473	3464	3458	3479	3461	330
180°	3479	3479	3479	3479	3479	

TEST NUMBER: P905428

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1556.4	1556.4	1556.4	1556.4	1556.4
2.5°	1565.5	1558.0	1541.5	1556.4	1553.6
5°	1556.4	1550.5	1534.0	1545.9	1543.1
7.5°	1545.9	1537.0	1520.5	1532.6	1529.6
10°	1529.6	1519.1	1501.2	1513.1	1508.6
12.5°	1507.0	1498.1	1480.2	1487.7	1484.6
15°	1481.6	1472.7	1453.2	1459.2	1451.8
17.5°	1450.2	1441.3	1421.8	1429.2	1421.8
20°	1415.7	1406.8	1385.9	1390.3	1384.5
22.5°	1381.4	1367.9	1348.4	1348.4	1345.4
25°	1340.9	1329.0	1303.6	1306.5	1303.6
27.5°	1296.0	1285.5	1266.2	1261.7	1254.3
30°	1251.2	1239.2	1216.8	1212.3	1206.3
32.5°	1203.3	1194.4	1170.4	1161.4	1155.3
35°	1156.9	1142.0	1118.0	1109.0	1101.5
37.5°	1104.5	1091.0	1067.0	1056.6	1049.1
40°	1050.7	1038.6	1014.6	1001.3	995.3
42.5°	998.3	986.2	962.4	947.3	938.4
45°	941.4	931.0	908.4	892.1	886.0
47.5°	886.0	875.5	851.6	835.1	826.2
50°	827.6	820.1	799.2	778.2	770.7
52.5°	770.7	760.3	740.9	724.4	713.9
55°	712.5	703.4	685.5	667.5	660.1
57.5°	654.0	646.6	627.0	609.1	603.1
60°	595.6	589.7	568.8	552.3	547.8
62.5°	538.8	528.3	513.4	498.4	492.4
65°	480.5	471.4	456.5	443.0	435.6
67.5°	420.6	413.0	399.7	389.2	383.2
70°	365.2	359.2	345.7	335.2	329.3
72.5°	308.4	302.3	294.9	284.4	279.9
75°	251.4	248.5	240.9	232.0	235.0
77.5°	200.5	194.5	191.5	187.0	182.6
80°	149.7	148.1	145.1	140.7	137.7
82.5°	101.8	101.8	100.4	94.3	94.3
85°	61.3	59.9	58.4	53.8	52.4
87.5°	27.0	24.0	21.0	16.5	14.9
90°	3.1	37.8	102.8	96.5	99.6
92.5°	65.0	88.1	91.2	94.4	94.4
95°	153.1	182.5	187.7	187.7	182.5
97.5°	254.9	282.1	293.7	293.7	293.7
100°	372.3	396.4	404.8	404.8	401.7
102.5°	496.1	513.9	525.5	528.6	525.5
105°	631.4	639.8	646.1	651.3	651.3
107.5°	765.6	778.2	778.2	780.3	765.6
110°	895.7	912.5	912.5	912.5	904.1

TEST NUMBER: P905428

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1036.2	1054.0	1050.9	1042.5	1036.2
115°	1174.7	1191.4	1186.2	1183.1	1174.7
117.5°	1312.1	1335.1	1320.4	1312.1	1303.7
120°	1450.5	1473.6	1450.5	1450.5	1441.1
122.5°	1576.4	1605.7	1591.0	1582.6	1576.4
125°	1708.5	1734.7	1726.3	1716.9	1713.7
127.5°	1837.5	1870.0	1858.5	1845.9	1837.5
130°	1958.1	1995.9	1990.6	1984.3	1972.8
132.5°	2093.4	2122.8	2124.9	2110.2	2101.8
135°	2209.8	2242.3	2248.6	2245.5	2237.1
137.5°	2339.9	2366.1	2371.3	2369.2	2356.7
140°	2454.2	2480.4	2495.1	2495.1	2483.6
142.5°	2571.7	2597.9	2606.3	2609.4	2597.9
145°	2682.8	2703.8	2720.6	2723.7	2712.2
147.5°	2782.5	2808.7	2821.3	2826.5	2815.0
150°	2885.3	2903.1	2914.6	2924.1	2914.6
152.5°	2976.5	2994.3	3009.0	3020.6	3009.0
155°	3067.8	3076.1	3085.6	3100.3	3090.8
157.5°	3146.4	3152.7	3157.9	3178.9	3164.2
160°	3216.7	3223.0	3226.1	3244.0	3231.4
162.5°	3281.7	3281.7	3284.9	3304.8	3290.1
165°	3337.3	3334.1	3334.1	3355.1	3340.4
167.5°	3387.6	3378.2	3378.2	3399.2	3384.5
170°	3425.4	3417.0	3413.9	3434.8	3417.0
172.5°	3451.6	3443.2	3440.1	3461.1	3443.2
175°	3472.6	3464.2	3457.9	3478.9	3461.1
177.5°	3484.1	3475.7	3469.4	3487.3	3469.4
180°	3478.9	3478.9	3478.9	3478.9	3478.9

TEST NUMBER: P905428

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.42	6.12	6.54	7.23	8.78	4.99	5.69	6.11	6.80	8.35
	3H	7.07	7.70	8.20	8.82	10.38	6.60	7.23	7.73	8.35	9.91
	4H	7.65	8.25	8.79	9.37	10.93	7.18	7.77	8.32	8.90	10.46
	6H	8.04	8.59	9.19	9.72	11.29	7.57	8.12	8.71	9.24	10.82
	8H	8.14	8.67	9.29	9.81	11.37	7.67	8.19	8.82	9.33	10.90
	12H	8.19	8.68	9.34	9.82	11.41	7.71	8.20	8.86	9.33	10.93
4H	2H	5.87	6.46	7.01	7.58	9.15	5.52	6.12	6.66	7.24	8.80
	3H	7.72	8.21	8.87	9.36	10.94	7.32	7.82	8.47	8.97	10.55
	4H	8.43	8.88	9.58	10.02	11.62	8.02	8.48	9.17	9.61	11.21
	6H	8.93	9.32	10.09	10.48	12.07	8.52	8.91	9.68	10.07	11.66
	8H	9.08	9.44	10.24	10.59	12.20	8.67	9.03	9.82	10.18	11.79
	12H	9.14	9.48	10.32	10.64	12.25	8.72	9.05	9.90	10.22	11.82
8H	4H	8.61	8.98	9.77	10.13	11.73	8.25	8.61	9.41	9.77	11.37
	6H	9.24	9.54	10.41	10.73	12.33	8.87	9.17	10.05	10.37	11.97
	8H	9.46	9.72	10.64	10.89	12.51	9.09	9.35	10.27	10.52	12.14
	12H	9.58	9.81	10.77	10.98	12.63	9.20	9.43	10.38	10.60	12.25
12H	4H	8.59	8.92	9.76	10.08	11.69	8.24	8.57	9.41	9.73	11.34
	6H	9.26	9.53	10.45	10.70	12.32	8.91	9.18	10.10	10.35	11.97
	8H	9.50	9.73	10.69	10.90	12.55	9.14	9.37	10.33	10.54	12.20