

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P927224

Luminaire Tested: DFN2DIP-HX4F0-040D110US835-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P927224
REPORT IS A COMBINATION OF REPORTS P900945 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-040D110US835-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14850.0 lumens
Efficiency: N/A
Efficacy: 123.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 120.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P927224

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLONL

Luminous Intensity Polar Plot

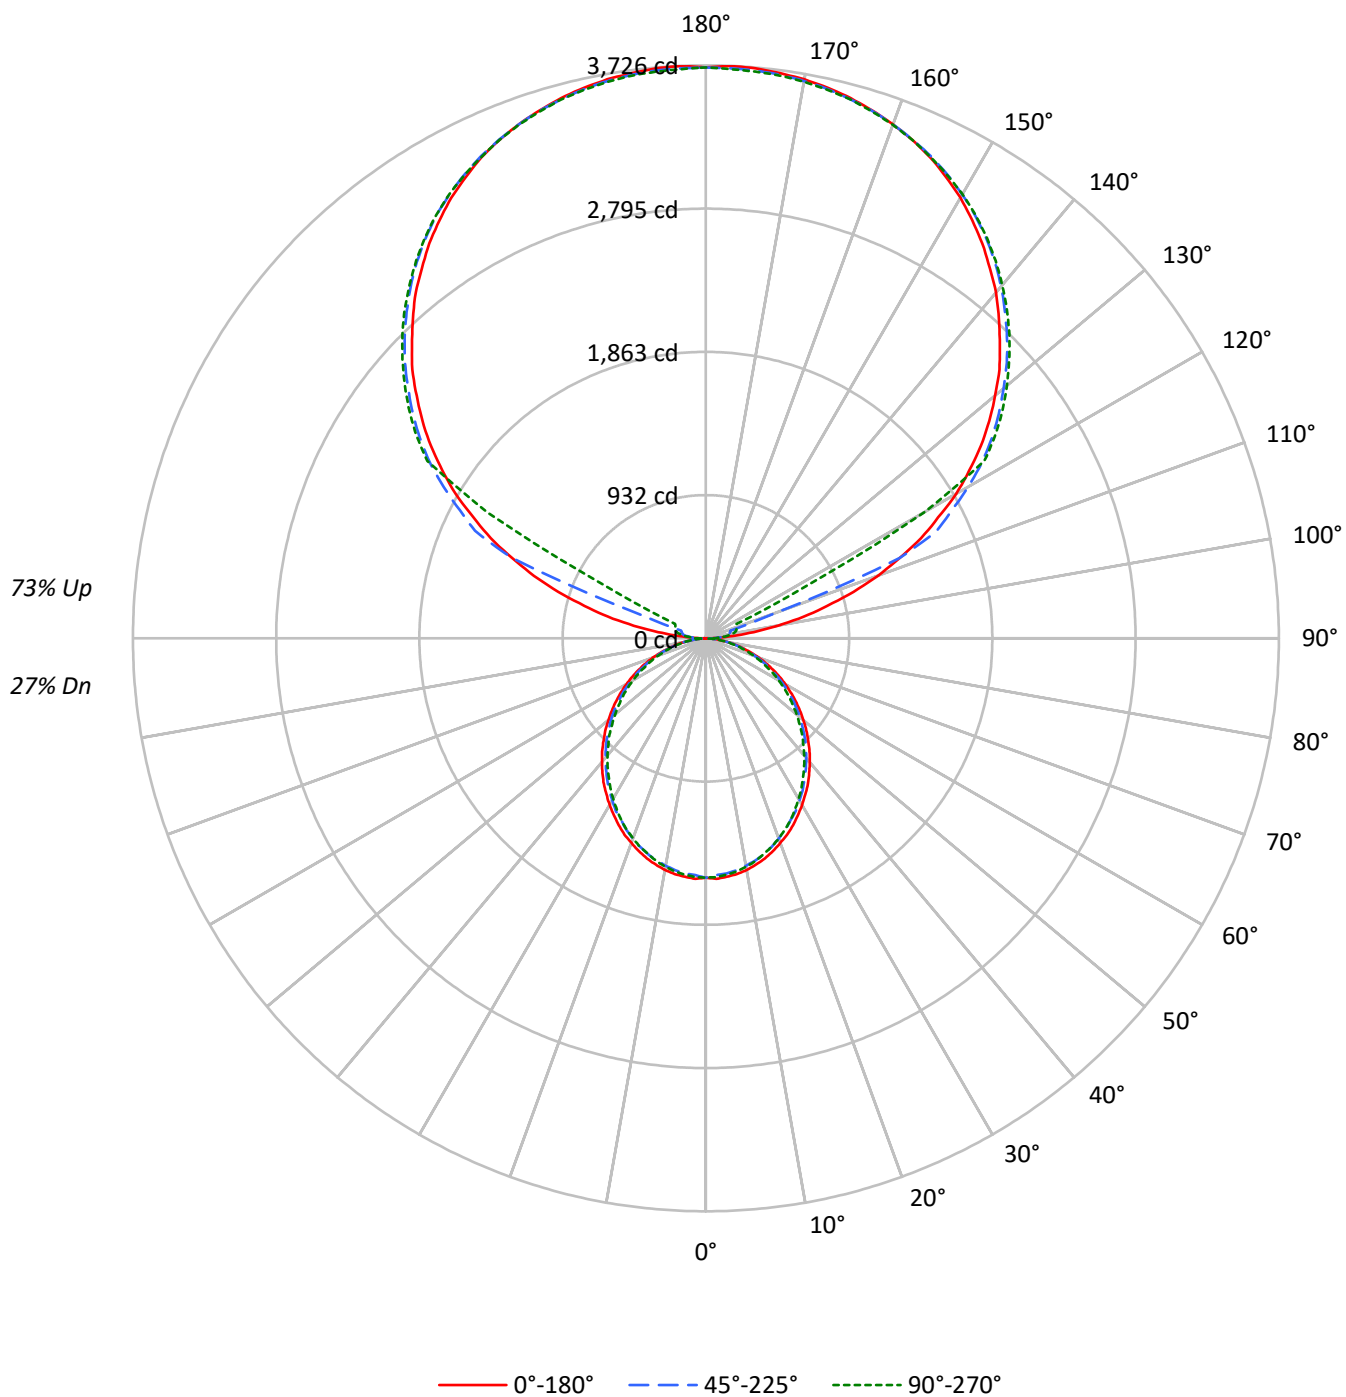

TEST NUMBER: P927224

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	70	70	70	52	52	52	35	35	35
1	93	88	85	81	82	79	76	73	62	59	58	45	44	43	31	30	29
2	84	77	71	66	75	69	64	60	54	51	48	40	38	36	27	26	25
3	77	68	61	55	68	61	55	50	47	43	40	35	33	30	24	22	21
4	70	60	52	46	62	54	47	42	42	38	34	31	28	26	21	20	18
5	64	53	45	40	57	48	41	36	38	33	29	28	25	22	19	17	16
6	59	48	40	34	53	43	36	31	34	29	25	25	22	19	17	15	14
7	55	43	35	30	49	39	32	27	30	26	22	23	20	17	16	14	12
8	50	39	31	26	45	35	28	24	28	23	19	21	18	15	15	12	11
9	47	35	28	23	42	32	25	21	25	21	17	19	16	14	13	11	10
10	44	32	25	21	39	29	23	19	23	19	15	18	14	12	12	10	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1157	1157	1157
5°	1159	1141	1149
10°	1150	1126	1133
15°	1133	1108	1109
20°	1110	1082	1084
25°	1088	1051	1056
30°	1059	1023	1019
35°	1032	989	980
40°	999	955	944
45°	966	921	906
50°	930	885	863
55°	892	844	823
60°	850	795	777
65°	803	744	723
70°	744	682	664
75°	662	608	611
80°	563	513	508
85°	409	349	338

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1906 cd/sqm

TEST NUMBER: P927224

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.5	1.0
10°-20°	412.2	2.8
20°-30°	605.7	4.1
30°-40°	703.5	4.7
40°-50°	702.6	4.7
50°-60°	612.7	4.1
60°-70°	452.9	3.0
70°-80°	256.2	1.7
80°-90°	74.2	0.5
90°-100°	122.4	0.8
100°-110°	456.3	3.1
110°-120°	1210.3	8.1
120°-130°	2007.3	13.5
130°-140°	2132.2	14.4
140°-150°	1981.7	13.3
150°-160°	1593.2	10.7
160°-170°	1026.6	6.9
170°-180°	353.3	2.4
0°-30°	1164.4	7.8
0°-40°	1867.9	12.6
0°-60°	3183.2	21.4
0°-90°	3966.5	26.7
90°-120°	1789.0	12.0
90°-150°	7910.3	53.3
90°-180°	10883.0	73.3
0°-180°	14850.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1556	1556	1556	1556	1556	
5°	1556	1550	1534	1546	1543	148
15°	1482	1473	1453	1459	1452	417
25°	1341	1329	1304	1306	1304	617
35°	1157	1142	1118	1109	1102	722
45°	941	931	908	892	886	727
55°	712	703	686	668	660	637
65°	480	471	456	443	436	475
75°	251	248	241	232	235	268
85°	61	60	58	54	52	68
90°	3	32	54	67	72	14
95°	174	86	105	118	116	207
105°	817	897	164	193	204	873
115°	1544	1590	1658	414	220	1521
125°	2184	2219	2270	2289	2297	1948
135°	2702	2746	2769	2797	2791	2088
145°	3135	3132	3178	3197	3183	1961
155°	3452	3428	3460	3476	3455	1591
165°	3637	3621	3629	3648	3629	1028
175°	3720	3702	3707	3726	3699	354
180°	3712	3712	3712	3712	3712	

TEST NUMBER: P927224

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1556.4	1556.4	1556.4	1556.4	1556.4
2.5°	1565.5	1558.0	1541.5	1556.4	1553.6
5°	1556.4	1550.5	1534.0	1545.9	1543.1
7.5°	1545.9	1537.0	1520.5	1532.6	1529.6
10°	1529.6	1519.1	1501.2	1513.1	1508.6
12.5°	1507.0	1498.1	1480.2	1487.7	1484.6
15°	1481.6	1472.7	1453.2	1459.2	1451.8
17.5°	1450.2	1441.3	1421.8	1429.2	1421.8
20°	1415.7	1406.8	1385.9	1390.3	1384.5
22.5°	1381.4	1367.9	1348.4	1348.4	1345.4
25°	1340.9	1329.0	1303.6	1306.5	1303.6
27.5°	1296.0	1285.5	1266.2	1261.7	1254.3
30°	1251.2	1239.2	1216.8	1212.3	1206.3
32.5°	1203.3	1194.4	1170.4	1161.4	1155.3
35°	1156.9	1142.0	1118.0	1109.0	1101.5
37.5°	1104.5	1091.0	1067.0	1056.6	1049.1
40°	1050.7	1038.6	1014.6	1001.3	995.3
42.5°	998.3	986.2	962.4	947.3	938.4
45°	941.4	931.0	908.4	892.1	886.0
47.5°	886.0	875.5	851.6	835.1	826.2
50°	827.6	820.1	799.2	778.2	770.7
52.5°	770.7	760.3	740.9	724.4	713.9
55°	712.5	703.4	685.5	667.5	660.1
57.5°	654.0	646.6	627.0	609.1	603.1
60°	595.6	589.7	568.8	552.3	547.8
62.5°	538.8	528.3	513.4	498.4	492.4
65°	480.5	471.4	456.5	443.0	435.6
67.5°	420.6	413.0	399.7	389.2	383.2
70°	365.2	359.2	345.7	335.2	329.3
72.5°	308.4	302.3	294.9	284.4	279.9
75°	251.4	248.5	240.9	232.0	235.0
77.5°	200.5	194.5	191.5	187.0	182.6
80°	149.7	148.1	145.1	140.7	137.7
82.5°	101.8	101.8	100.4	94.3	94.3
85°	61.3	59.9	58.4	53.8	52.4
87.5°	27.0	24.0	21.0	16.5	14.9
90°	2.6	32.2	53.6	67.3	72.4
92.5°	67.3	56.5	64.4	69.9	72.4
95°	174.5	85.8	104.6	118.3	115.5
97.5°	314.2	94.1	136.8	145.1	147.7
100°	475.6	107.5	153.1	174.5	179.9
102.5°	652.6	647.5	158.5	187.9	196.2
105°	816.6	897.3	164.0	193.3	204.2
107.5°	1007.4	1074.3	169.4	198.7	209.6
110°	1190.1	1246.3	470.2	201.6	212.1

TEST NUMBER: P927224

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1362.1	1410.2	1364.6	206.7	215.0
115°	1544.5	1590.1	1657.5	413.7	220.4
117.5°	1703.1	1756.7	1802.6	1418.2	714.5
120°	1880.4	1920.6	1969.1	2001.3	1638.6
122.5°	2030.7	2073.7	2127.6	2143.6	2146.5
125°	2183.8	2218.9	2269.9	2288.7	2296.7
127.5°	2323.5	2361.1	2401.6	2428.4	2431.0
130°	2455.2	2498.3	2527.6	2557.3	2554.8
132.5°	2589.5	2624.6	2654.0	2678.2	2675.7
135°	2702.5	2745.5	2769.4	2796.6	2791.1
137.5°	2820.5	2852.7	2879.8	2906.6	2898.6
140°	2936.0	2957.6	2987.0	3011.2	2997.8
142.5°	3032.9	3051.7	3086.5	3107.9	3094.5
145°	3135.0	3132.1	3177.7	3196.6	3183.2
147.5°	3223.4	3215.4	3261.0	3274.4	3263.9
150°	3309.5	3290.7	3333.7	3349.7	3336.3
152.5°	3381.9	3360.5	3400.7	3417.0	3398.2
155°	3451.8	3427.8	3460.0	3476.0	3454.6
157.5°	3508.2	3486.8	3511.1	3529.9	3508.2
160°	3556.7	3540.4	3556.7	3572.6	3553.8
162.5°	3599.4	3583.5	3596.9	3615.7	3591.5
165°	3637.1	3621.1	3629.1	3647.9	3629.1
167.5°	3666.7	3650.5	3658.8	3677.6	3653.4
170°	3691.0	3674.7	3680.1	3699.0	3674.7
172.5°	3706.9	3691.0	3696.4	3715.2	3691.0
175°	3720.3	3701.5	3706.9	3725.8	3699.0
177.5°	3725.8	3706.9	3709.8	3728.6	3704.4
180°	3712.4	3712.4	3712.4	3712.4	3712.4

TEST NUMBER: P927224

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US835-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.10	5.78	6.23	6.91	8.48	4.66	5.35	5.80	6.47	8.04
	3H	6.74	7.36	7.89	8.49	10.07	6.27	6.88	7.41	8.02	9.60
	4H	7.32	7.91	8.47	9.04	10.63	6.85	7.43	8.00	8.57	10.16
	6H	7.71	8.25	8.87	9.39	10.99	7.24	7.77	8.40	8.91	10.51
	8H	7.81	8.32	8.98	9.48	11.07	7.34	7.85	8.50	9.00	10.59
	12H	7.86	8.34	9.02	9.49	11.10	7.38	7.86	8.54	9.01	10.62
4H	2H	5.54	6.12	6.70	7.25	8.84	5.19	5.77	6.35	6.91	8.50
	3H	7.39	7.87	8.55	9.03	10.63	6.99	7.48	8.16	8.64	10.24
	4H	8.09	8.54	9.26	9.69	11.31	7.69	8.14	8.86	9.28	10.91
	6H	8.60	8.98	9.77	10.15	11.77	8.19	8.57	9.36	9.74	11.36
	8H	8.75	9.10	9.92	10.27	11.89	8.33	8.69	9.50	9.85	11.48
	12H	8.81	9.14	10.00	10.31	11.94	8.39	8.71	9.58	9.89	11.52
8H	4H	8.28	8.64	9.45	9.80	11.43	7.92	8.27	9.09	9.44	11.06
	6H	8.90	9.20	10.09	10.40	12.03	8.54	8.83	9.73	10.04	11.66
	8H	9.12	9.38	10.32	10.56	12.21	8.75	9.01	9.95	10.19	11.84
	12H	9.25	9.47	10.45	10.65	12.33	8.86	9.09	10.06	10.27	11.94
12H	4H	8.25	8.58	9.44	9.75	11.39	7.90	8.23	9.09	9.40	11.03
	6H	8.93	9.19	10.13	10.37	12.02	8.58	8.84	9.78	10.02	11.66
	8H	9.17	9.39	10.37	10.57	12.25	8.81	9.03	10.01	10.21	11.89

END OF REPORT