

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905455

Luminaire Tested: DFN2DIP-HX4F0-060D060US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905455
REPORT IS A COMBINATION OF REPORTS P899340 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-060D060US835-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10410.0 lumens
Efficiency: N/A
Efficacy: 118.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 88.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905455

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US835-RLLFLL

Luminous Intensity Polar Plot

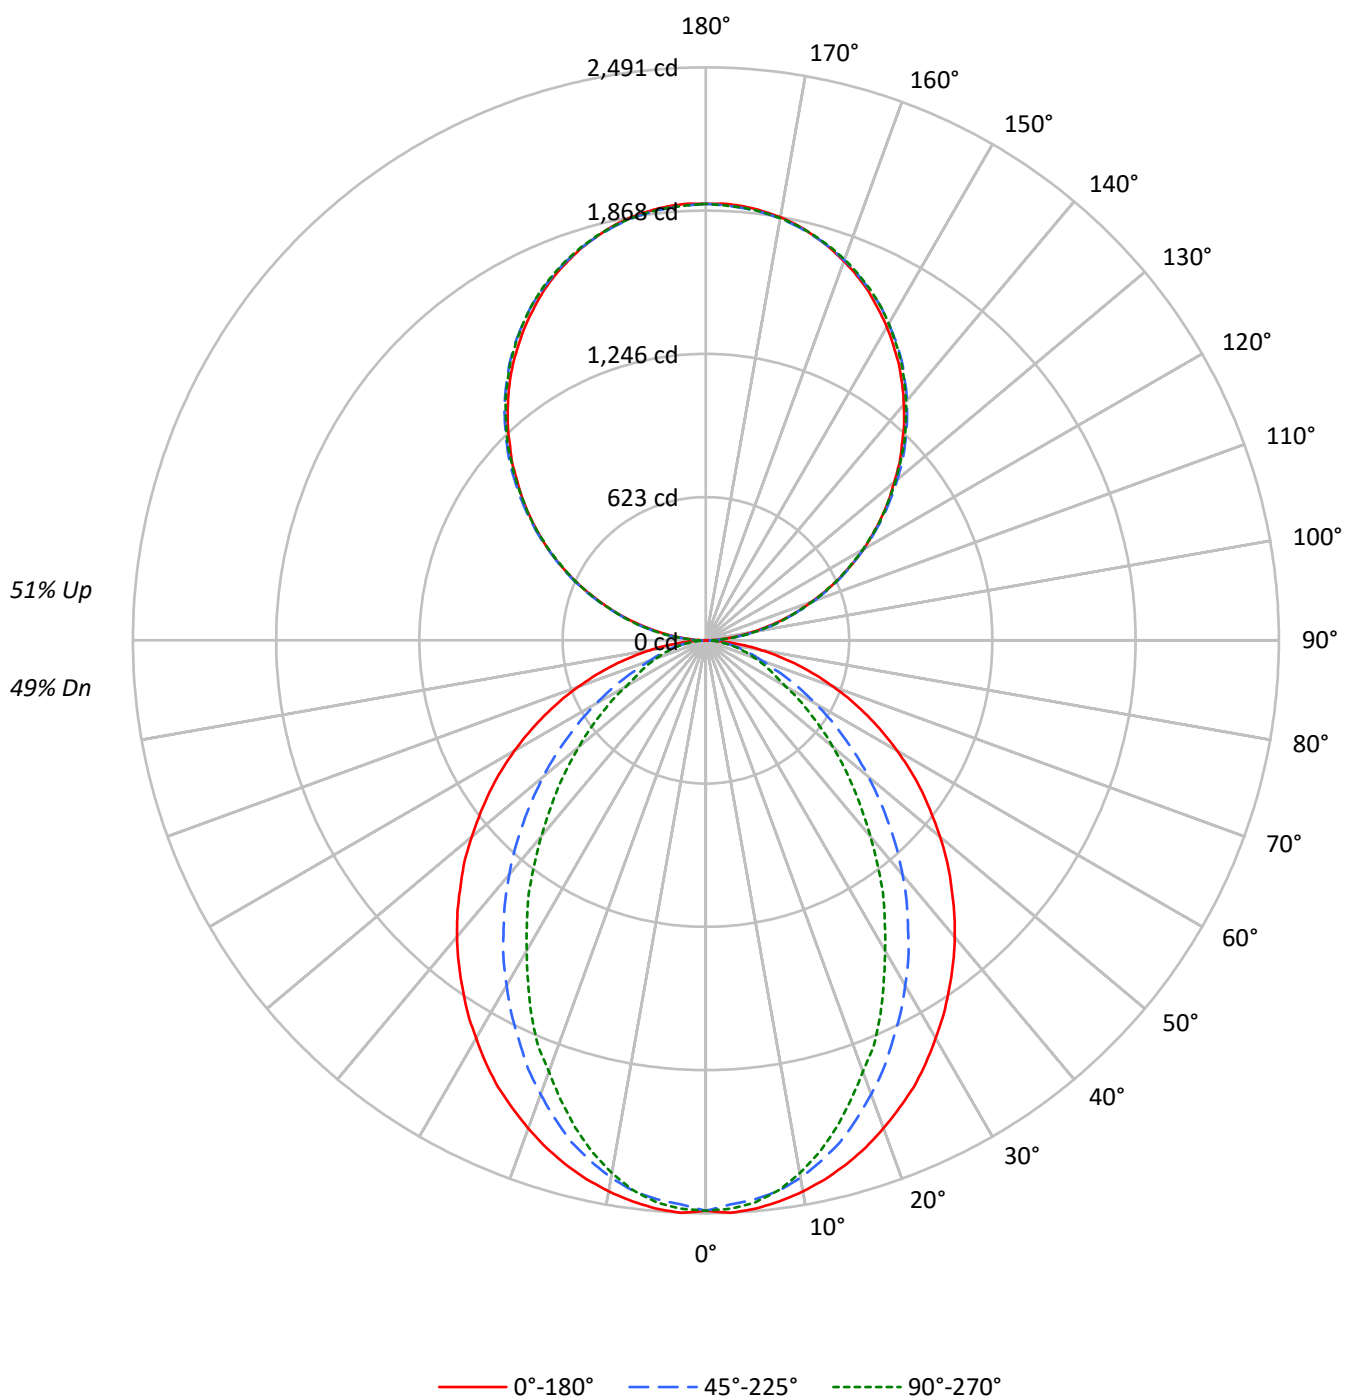

TEST NUMBER: P905455

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US835-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1844	1844	1844
5°	1847	1815	1826
10°	1829	1779	1767
15°	1804	1721	1675
20°	1771	1640	1563
25°	1737	1549	1454
30°	1691	1456	1316
35°	1646	1356	1194
40°	1601	1252	1055
45°	1548	1138	929
50°	1493	1022	806
55°	1436	898	688
60°	1370	768	566
65°	1294	636	510
70°	1202	513	462
75°	1087	453	420
80°	919	380	365
85°	643	255	275

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1548 cd/sqm

TEST NUMBER: P905455

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US835-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	2.2
10°-20°	638.0	6.1
20°-30°	895.7	8.6
30°-40°	976.4	9.4
40°-50°	897.4	8.6
50°-60°	704.8	6.8
60°-70°	458.8	4.4
70°-80°	236.1	2.3
80°-90°	65.7	0.6
90°-100°	117.4	1.1
100°-110°	373.1	3.6
110°-120°	638.5	6.1
120°-130°	839.7	8.1
130°-140°	942.5	9.1
140°-150°	924.2	8.9
150°-160°	775.3	7.4
160°-170°	514.2	4.9
170°-180°	179.7	1.7
0°-30°	1766.2	17.0
0°-40°	2742.6	26.3
0°-60°	4344.8	41.7
0°-90°	5105.4	49.0
90°-120°	1129.0	10.8
90°-150°	3835.4	36.8
90°-180°	5305.0	51.0
0°-180°	10410.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	111
90°	2	21	56	53	54	10
95°	84	100	102	102	100	93
105°	344	349	352	355	355	363
115°	641	650	647	645	641	634
125°	932	946	942	936	935	833
135°	1205	1223	1226	1225	1220	932
145°	1463	1475	1484	1486	1479	914
155°	1673	1678	1683	1691	1686	770
165°	1820	1819	1819	1830	1822	514
175°	1894	1890	1886	1898	1888	180
180°	1898	1898	1898	1898	1898	

TEST NUMBER: P905455

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US835-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	1.7	20.6	56.1	52.6	54.3
92.5°	35.5	48.1	49.8	51.5	51.5
95°	83.5	99.5	102.4	102.4	99.5
97.5°	139.0	153.9	160.2	160.2	160.2
100°	203.1	216.2	220.8	220.8	219.1
102.5°	270.6	280.3	286.6	288.3	286.6
105°	344.4	349.0	352.4	355.3	355.3
107.5°	417.6	424.5	424.5	425.6	417.6
110°	488.6	497.7	497.7	497.7	493.1



TEST NUMBER: P905455

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US835-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	565.2	574.9	573.2	568.6	565.2
115°	640.7	649.9	647.0	645.3	640.7
117.5°	715.7	728.3	720.2	715.7	711.1
120°	791.2	803.8	791.2	791.2	786.0
122.5°	859.8	875.8	867.8	863.3	859.8
125°	931.9	946.2	941.6	936.5	934.8
127.5°	1002.3	1020.0	1013.7	1006.9	1002.3
130°	1068.1	1088.7	1085.8	1082.4	1076.1
132.5°	1141.9	1157.9	1159.0	1151.0	1146.4
135°	1205.4	1223.1	1226.5	1224.8	1220.2
137.5°	1276.3	1290.6	1293.5	1292.3	1285.5
140°	1338.7	1353.0	1361.0	1361.0	1354.7
142.5°	1402.7	1417.0	1421.6	1423.3	1417.0
145°	1463.4	1474.8	1484.0	1485.7	1479.4
147.5°	1517.7	1532.0	1538.9	1541.7	1535.4
150°	1573.8	1583.5	1589.8	1594.9	1589.8
152.5°	1623.5	1633.3	1641.3	1647.6	1641.3
155°	1673.3	1677.9	1683.0	1691.1	1685.9
157.5°	1716.2	1719.7	1722.5	1734.0	1726.0
160°	1754.6	1758.0	1759.7	1769.4	1762.6
162.5°	1790.0	1790.0	1791.7	1802.6	1794.6
165°	1820.3	1818.6	1818.6	1830.1	1822.1
167.5°	1847.8	1842.7	1842.7	1854.1	1846.1
170°	1868.4	1863.8	1862.1	1873.5	1863.8
172.5°	1882.7	1878.1	1876.4	1887.8	1878.1
175°	1894.1	1889.6	1886.1	1897.6	1887.8
177.5°	1900.4	1895.9	1892.4	1902.1	1892.4
180°	1897.6	1897.6	1897.6	1897.6	1897.6

TEST NUMBER: P905455

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US835-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.18	10.00	10.15	10.99	12.27	5.15	5.98	6.13	6.96	8.25
	3H	10.86	11.59	11.84	12.59	13.90	6.34	7.08	7.33	8.07	9.38
	4H	11.47	12.16	12.46	13.16	14.48	6.80	7.49	7.79	8.49	9.80
	6H	11.89	12.53	12.90	13.53	14.86	7.12	7.76	8.13	8.76	10.09
	8H	12.02	12.63	13.03	13.64	14.97	7.21	7.82	8.22	8.83	10.16
	12H	12.08	12.66	13.10	13.67	15.02	7.25	7.83	8.27	8.84	10.19
4H	2H	9.20	9.89	10.20	10.89	12.21	5.75	6.45	6.75	7.44	8.76
	3H	11.03	11.61	12.04	12.63	13.96	7.10	7.68	8.11	8.70	10.03
	4H	11.72	12.25	12.74	13.27	14.62	7.65	8.18	8.67	9.19	10.55
	6H	12.24	12.69	13.27	13.73	15.08	8.07	8.53	9.10	9.56	10.92
	8H	12.41	12.84	13.44	13.87	15.23	8.20	8.62	9.23	9.66	11.02
	12H	12.51	12.89	13.56	13.94	15.31	8.27	8.65	9.32	9.70	11.07
8H	4H	11.69	12.11	12.72	13.14	14.51	7.93	8.35	8.96	9.39	10.75
	6H	12.26	12.61	13.31	13.68	15.04	8.45	8.80	9.51	9.87	11.24
	8H	12.47	12.78	13.54	13.84	15.22	8.64	8.95	9.71	10.01	11.39
	12H	12.61	12.88	13.68	13.94	15.36	8.76	9.03	9.83	10.09	11.51
12H	4H	11.64	12.02	12.69	13.07	14.44	7.94	8.32	8.98	9.36	10.74
	6H	12.23	12.54	13.29	13.60	14.98	8.50	8.81	9.56	9.87	11.25
	8H	12.45	12.72	13.52	13.78	15.20	8.71	8.98	9.78	10.04	11.46