

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905495

Luminaire Tested: DFN2DIP-HX4F0-080D080US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905495
REPORT IS A COMBINATION OF REPORTS P899380 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-080D080US835-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13880.0 lumens
Efficiency: N/A
Efficacy: 113.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 122
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905495

CATALOG NUMBER: DFN2DIP-HX4F0-080D080US835-RLLFLL

Luminous Intensity Polar Plot

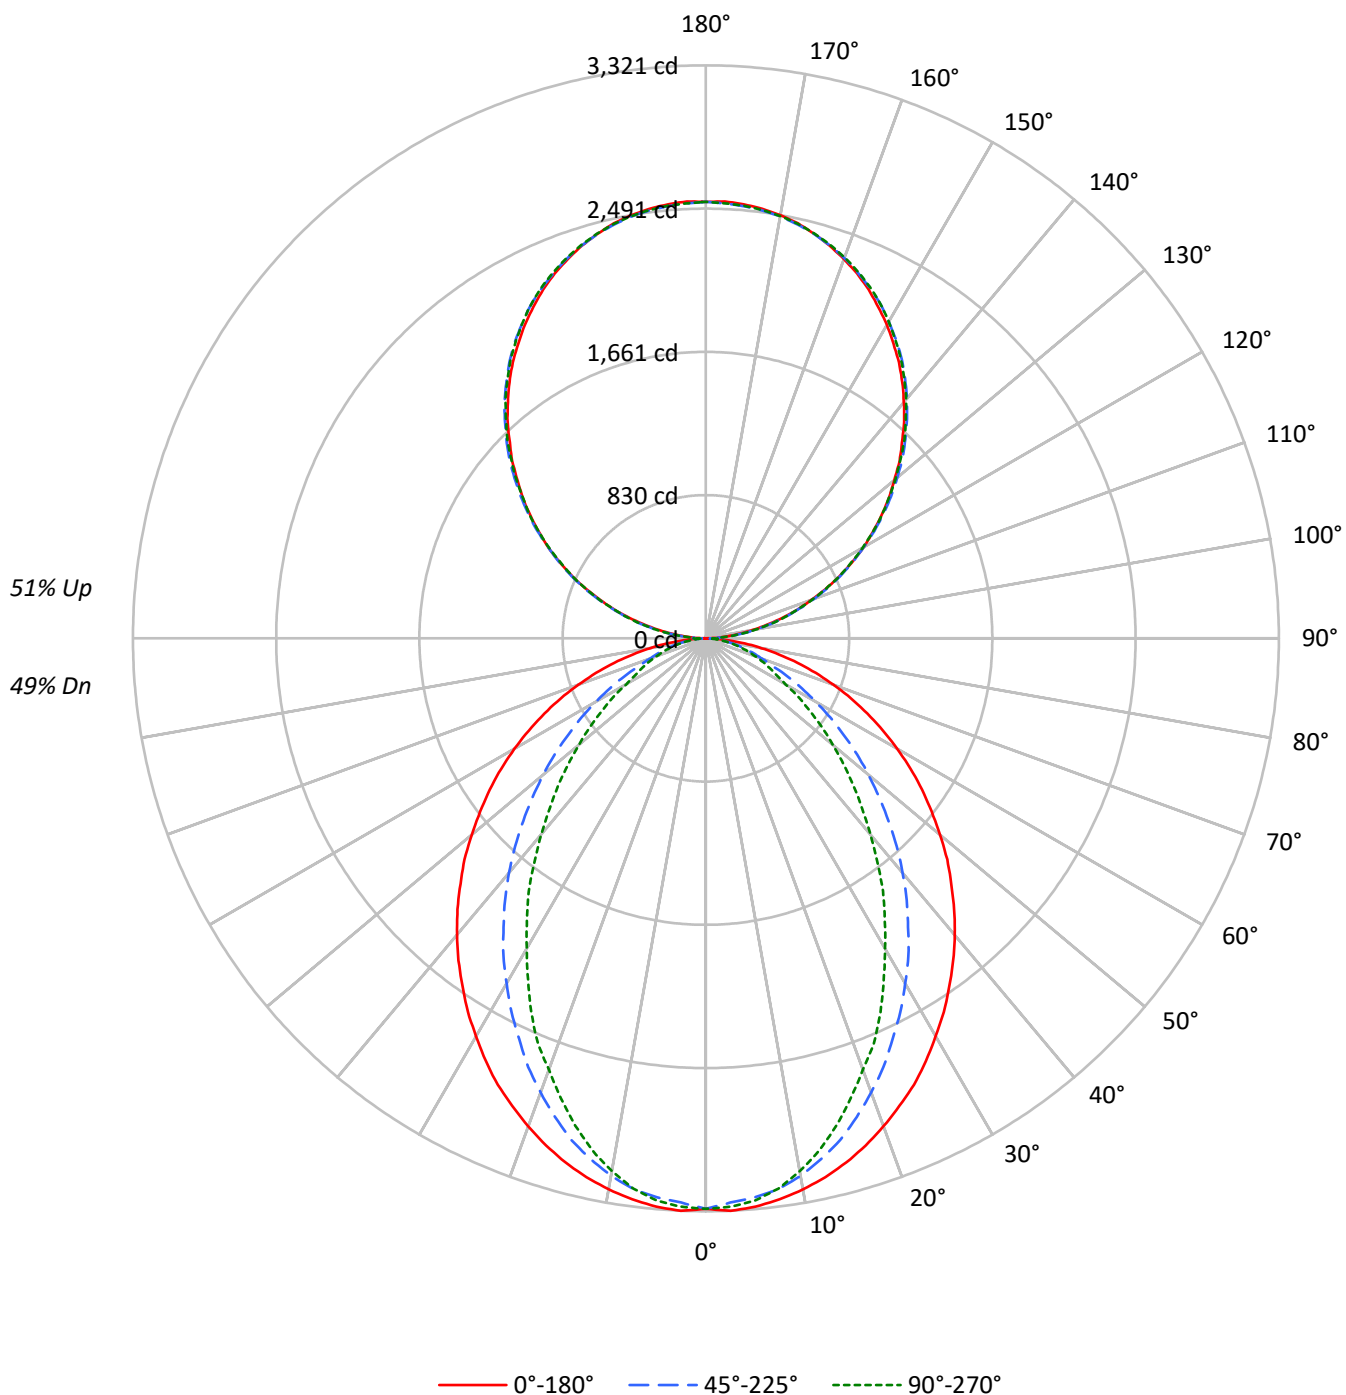

TEST NUMBER: P905495

CATALOG NUMBER: DFN2DIP-HX4F0-080D080US835-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2459	2459	2459
5°	2463	2420	2435
10°	2438	2373	2356
15°	2405	2294	2234
20°	2361	2186	2083
25°	2316	2065	1938
30°	2255	1941	1754
35°	2195	1808	1593
40°	2135	1670	1407
45°	2064	1517	1239
50°	1991	1362	1075
55°	1915	1197	917
60°	1827	1024	755
65°	1726	848	680
70°	1603	684	616
75°	1449	604	560
80°	1226	507	486
85°	857	340	366

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2064 cd/sqm

TEST NUMBER: P905495

CATALOG NUMBER: DFN2DIP-HX4F0-080D080US835-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	309.9	2.2
10°-20°	850.7	6.1
20°-30°	1194.3	8.6
30°-40°	1301.9	9.4
40°-50°	1196.6	8.6
50°-60°	939.7	6.8
60°-70°	611.7	4.4
70°-80°	314.9	2.3
80°-90°	87.6	0.6
90°-100°	156.6	1.1
100°-110°	497.5	3.6
110°-120°	851.3	6.1
120°-130°	1119.6	8.1
130°-140°	1256.7	9.1
140°-150°	1232.3	8.9
150°-160°	1033.7	7.4
160°-170°	685.6	4.9
170°-180°	239.6	1.7
0°-30°	2354.9	17.0
0°-40°	3656.8	26.3
0°-60°	5793.1	41.7
0°-90°	6807.2	49.0
90°-120°	1505.3	10.8
90°-150°	5113.9	36.8
90°-180°	7073.0	51.0
0°-180°	13880.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3306	3306	3306	3306	3306	
5°	3306	3292	3252	3279	3270	314
15°	3145	3112	3010	2953	2924	886
25°	2855	2759	2561	2439	2394	1313
35°	2460	2307	2044	1855	1789	1540
45°	2011	1810	1496	1284	1212	1553
55°	1529	1296	972	793	736	1366
65°	1032	790	521	419	410	1024
75°	550	341	239	218	216	582
85°	129	66	57	57	57	148
90°	2	28	75	70	72	14
95°	111	133	136	136	133	124
105°	459	465	470	474	474	485
115°	854	866	863	860	854	845
125°	1242	1262	1256	1249	1246	1110
135°	1607	1631	1635	1633	1627	1242
145°	1951	1966	1979	1981	1972	1219
155°	2231	2237	2244	2255	2248	1027
165°	2427	2425	2425	2440	2429	685
175°	2526	2519	2515	2530	2517	240
180°	2530	2530	2530	2530	2530	

TEST NUMBER: P905495

CATALOG NUMBER: DFN2DIP-HX4F0-080D080US835-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3306.4	3306.4	3306.4	3306.4	3306.4
2.5°	3321.3	3306.4	3273.4	3303.5	3297.5
5°	3306.4	3291.5	3252.4	3279.4	3270.5
7.5°	3279.4	3261.6	3219.7	3231.5	3216.5
10°	3243.5	3222.6	3162.9	3153.7	3135.9
12.5°	3198.8	3171.8	3090.8	3073.0	3040.0
15°	3144.8	3111.8	3010.2	2953.4	2923.5
17.5°	3081.9	3034.0	2908.3	2842.6	2794.6
20°	3010.2	2950.2	2800.7	2726.1	2660.0
22.5°	2932.4	2863.5	2689.9	2588.3	2543.5
25°	2854.6	2758.8	2561.3	2438.8	2393.7
27.5°	2761.9	2660.0	2441.6	2301.0	2232.1
30°	2663.2	2549.2	2309.9	2157.5	2076.5
32.5°	2567.3	2429.6	2184.5	2004.8	1929.9
35°	2459.7	2307.0	2043.8	1855.3	1789.2
37.5°	2354.9	2190.2	1912.1	1705.4	1630.8
40°	2244.2	2064.8	1774.3	1561.9	1484.1
42.5°	2130.5	1939.1	1636.8	1415.3	1340.6
45°	2010.8	1810.2	1496.2	1283.5	1211.8
47.5°	1897.2	1684.8	1361.6	1148.9	1083.2
50°	1771.4	1559.1	1229.9	1023.2	960.6
52.5°	1648.6	1424.1	1104.1	906.7	849.9
55°	1528.9	1295.6	972.4	793.0	736.2
57.5°	1406.4	1167.0	855.9	688.3	640.3
60°	1280.6	1041.3	733.0	580.6	532.7
62.5°	1158.1	918.7	628.3	484.8	461.0
65°	1032.4	789.8	520.6	419.1	409.8
67.5°	912.7	670.2	419.1	367.9	359.1
70°	787.0	553.7	347.0	317.1	305.1
72.5°	667.3	445.7	290.2	266.4	260.3
75°	550.5	341.0	239.4	218.4	215.6
77.5°	434.0	242.2	188.6	176.5	170.5
80°	326.0	173.7	143.5	131.7	131.7
82.5°	227.3	116.8	98.7	92.7	92.7
85°	128.6	65.7	56.8	56.8	56.8
87.5°	47.9	23.8	23.8	21.0	21.0
90°	2.3	27.5	74.8	70.2	72.5
92.5°	47.3	64.1	66.4	68.6	68.6
95°	111.4	132.7	136.5	136.5	132.7
97.5°	185.4	205.2	213.6	213.6	213.6
100°	270.8	288.3	294.4	294.4	292.1
102.5°	360.8	373.8	382.1	384.4	382.1
105°	459.2	465.3	469.9	473.7	473.7
107.5°	556.8	566.0	566.0	567.5	556.8
110°	651.4	663.6	663.6	663.6	657.5

TEST NUMBER: P905495

CATALOG NUMBER: DFN2DIP-HX4F0-080D080US835-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	753.6	766.6	764.3	758.2	753.6
115°	854.3	866.5	862.7	860.4	854.3
117.5°	954.2	971.0	960.3	954.2	948.1
120°	1054.9	1071.7	1054.9	1054.9	1048.0
122.5°	1146.4	1167.8	1157.1	1151.0	1146.4
125°	1242.5	1261.6	1255.5	1248.6	1246.4
127.5°	1336.4	1360.0	1351.6	1342.5	1336.4
130°	1424.1	1451.5	1447.7	1443.2	1434.8
132.5°	1522.5	1543.8	1545.4	1534.7	1528.6
135°	1607.1	1630.8	1635.4	1633.1	1627.0
137.5°	1701.7	1720.8	1724.6	1723.1	1713.9
140°	1784.9	1803.9	1814.6	1814.6	1806.2
142.5°	1870.3	1889.4	1895.5	1897.8	1889.4
145°	1951.2	1966.4	1978.6	1980.9	1972.5
147.5°	2023.6	2042.7	2051.8	2055.7	2047.3
150°	2098.4	2111.3	2119.7	2126.6	2119.7
152.5°	2164.7	2177.7	2188.4	2196.8	2188.4
155°	2231.1	2237.2	2244.1	2254.7	2247.9
157.5°	2288.3	2292.9	2296.7	2311.9	2301.3
160°	2339.4	2344.0	2346.3	2359.2	2350.1
162.5°	2386.7	2386.7	2389.0	2403.5	2392.8
165°	2427.1	2424.8	2424.8	2440.1	2429.4
167.5°	2463.7	2456.9	2456.9	2472.1	2461.4
170°	2491.2	2485.1	2482.8	2498.1	2485.1
172.5°	2510.3	2504.2	2501.9	2517.1	2504.2
175°	2525.5	2519.4	2514.8	2530.1	2517.1
177.5°	2533.9	2527.8	2523.2	2536.2	2523.2
180°	2530.1	2530.1	2530.1	2530.1	2530.1



TEST NUMBER: P905495

CATALOG NUMBER: DFN2DIP-HX4F0-080D080US835-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.18	11.00	11.15	11.99	13.27	6.15	6.98	7.13	7.96	9.25
	3H	11.86	12.59	12.84	13.59	14.89	7.34	8.08	8.33	9.07	10.38
	4H	12.47	13.16	13.46	14.16	15.48	7.80	8.49	8.79	9.49	10.80
	6H	12.89	13.53	13.90	14.53	15.86	8.12	8.76	9.12	9.76	11.09
	8H	13.02	13.63	14.03	14.64	15.97	8.21	8.82	9.22	9.83	11.16
	12H	13.08	13.66	14.10	14.67	16.02	8.25	8.83	9.27	9.84	11.19
4H	2H	10.20	10.89	11.20	11.89	13.21	6.75	7.45	7.75	8.44	9.76
	3H	12.03	12.61	13.04	13.63	14.96	8.10	8.68	9.11	9.70	11.03
	4H	12.72	13.25	13.74	14.27	15.62	8.65	9.18	9.67	10.19	11.55
	6H	13.24	13.69	14.27	14.73	16.08	9.07	9.52	10.10	10.56	11.92
	8H	13.41	13.84	14.44	14.87	16.23	9.20	9.62	10.23	10.66	12.02
	12H	13.51	13.89	14.56	14.94	16.31	9.27	9.65	10.31	10.70	12.07
8H	4H	12.69	13.11	13.72	14.14	15.51	8.93	9.35	9.96	10.39	11.75
	6H	13.26	13.61	14.31	14.68	16.04	9.45	9.80	10.50	10.87	12.24
	8H	13.47	13.78	14.54	14.84	16.22	9.64	9.95	10.70	11.01	12.39
	12H	13.61	13.88	14.68	14.94	16.36	9.76	10.03	10.83	11.09	12.51
12H	4H	12.64	13.02	13.69	14.07	15.44	8.94	9.32	9.98	10.36	11.74
	6H	13.23	13.54	14.29	14.60	15.98	9.50	9.81	10.56	10.87	12.25
	8H	13.45	13.72	14.52	14.78	16.20	9.71	9.98	10.78	11.04	12.46