

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905540

Luminaire Tested: DFN2DIP-HX4F0-110D040US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905540
REPORT IS A COMBINATION OF REPORTS P899313 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-110D040US835-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14430.0 lumens
Efficiency: N/A
Efficacy: 106.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 136
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905540
CATALOG NUMBER: DFN2DIP-HX4F0-110D040US835-FLLFLL

Luminous Intensity Polar Plot

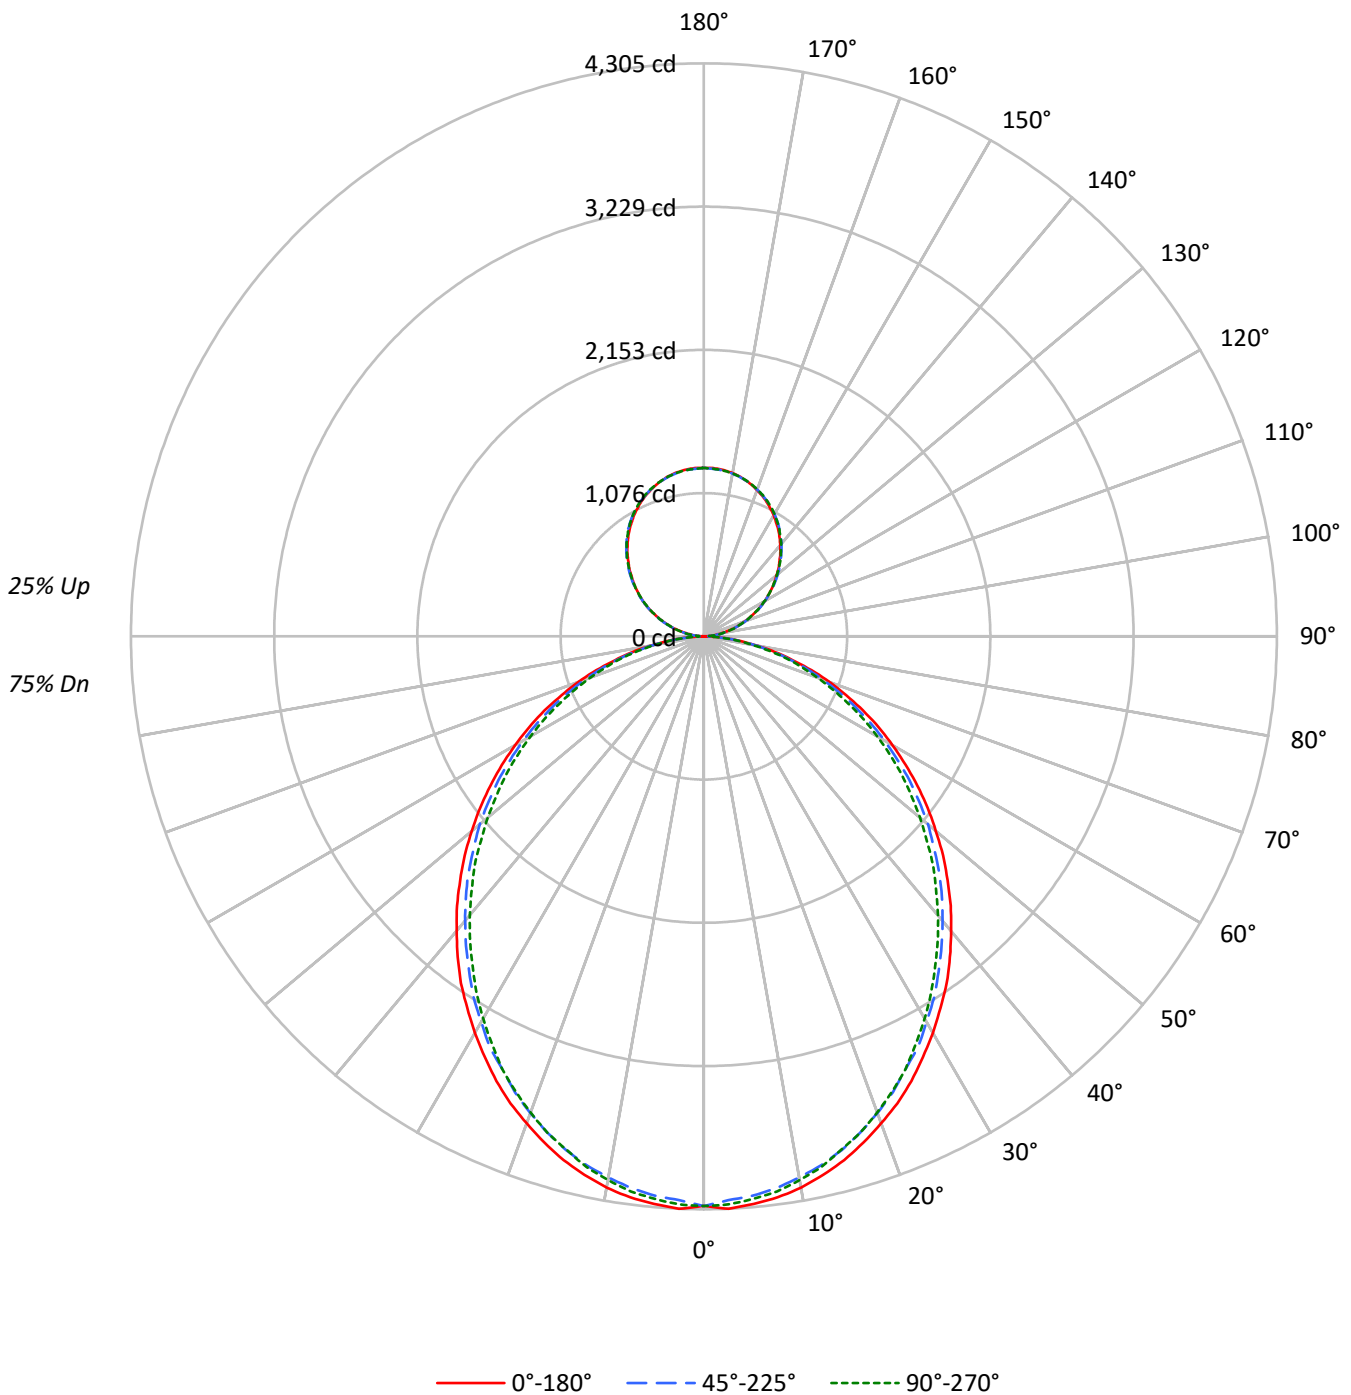



TEST NUMBER: P905540

CATALOG NUMBER: DFN2DIP-HX4F0-110D040US835-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	113	113	113	113	108	108	108	108	97	97	97	88	88	88	80	80	80	80	80	80	75
1	104	99	95	91	98	94	91	88	86	83	80	78	76	74	70	69	67	70	69	67	64
2	94	87	80	75	89	83	77	72	75	71	67	68	65	62	62	59	57	62	59	57	53
3	86	76	68	62	82	73	66	60	66	61	56	60	56	52	55	51	48	55	51	48	45
4	79	68	59	53	75	65	57	51	59	53	48	54	49	45	49	45	42	49	45	42	39
5	73	60	52	46	69	58	50	44	53	46	42	48	43	39	44	40	36	44	40	36	34
6	67	54	46	40	63	52	44	39	48	41	36	44	38	34	40	36	32	40	36	32	30
7	62	49	41	35	59	47	40	34	44	37	32	40	34	30	37	32	29	37	32	29	26
8	58	45	37	31	55	43	36	30	40	33	29	37	31	27	34	29	26	34	29	26	23
9	54	41	33	28	51	40	32	27	37	30	26	34	28	25	31	27	23	31	27	23	21
10	50	38	30	25	48	36	29	25	34	28	23	31	26	22	29	24	21	29	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3183	3183	3183
5°	3188	3139	3160
10°	3162	3097	3117
15°	3116	3046	3050
20°	3054	2975	2982
25°	2991	2891	2903
30°	2913	2812	2803
35°	2839	2720	2696
40°	2748	2626	2595
45°	2657	2533	2492
50°	2558	2434	2372
55°	2454	2320	2262
60°	2337	2185	2136
65°	2209	2045	1987
70°	2046	1875	1827
75°	1820	1671	1680
80°	1549	1411	1397
85°	1124	961	929

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2657 cd/sqm



TEST NUMBER: P905540
 CATALOG NUMBER: DFN2DIP-HX4F0-110D040US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	402.8	2.8
10°-20°	1133.5	7.9
20°-30°	1665.7	11.5
30°-40°	1934.7	13.4
40°-50°	1932.3	13.4
50°-60°	1684.9	11.7
60°-70°	1245.5	8.6
70°-80°	704.7	4.9
80°-90°	189.6	1.3
90°-100°	78.3	0.5
100°-110°	248.7	1.7
110°-120°	425.6	2.9
120°-130°	559.8	3.9
130°-140°	628.3	4.4
140°-150°	616.2	4.3
150°-160°	516.9	3.6
160°-170°	342.8	2.4
170°-180°	119.8	0.8
0°-30°	3202.1	22.2
0°-40°	5136.7	35.6
0°-60°	8753.8	60.7
0°-90°	10893.6	75.5
90°-120°	752.7	5.2
90°-150°	2556.9	17.7
90°-180°	3536.0	24.5
0°-180°	14430.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4280	4280	4280	4280	4280	
5°	4280	4264	4219	4251	4244	406
15°	4074	4050	3996	4013	3992	1148
25°	3688	3655	3585	3593	3585	1697
35°	3182	3140	3074	3050	3029	1987
45°	2589	2560	2498	2453	2437	1998
55°	1959	1934	1885	1836	1815	1752
65°	1321	1296	1255	1218	1198	1306
75°	691	683	662	638	646	738
85°	169	165	161	148	144	188
90°	1	14	37	35	36	14
95°	56	66	68	68	66	62
105°	230	233	235	237	237	242
115°	427	433	431	430	427	422
125°	621	631	628	624	623	555
135°	804	815	818	816	814	621
145°	976	983	989	990	986	610
155°	1116	1119	1122	1127	1124	513
165°	1214	1212	1212	1220	1215	342
175°	1263	1260	1257	1265	1259	120
180°	1265	1265	1265	1265	1265	



TEST NUMBER: P905540

CATALOG NUMBER: DFN2DIP-HX4F0-110D040US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4280.2	4280.2	4280.2	4280.2	4280.2
2.5°	4305.0	4284.5	4239.1	4280.2	4272.3
5°	4280.2	4264.0	4218.6	4251.3	4243.5
7.5°	4251.3	4226.9	4181.5	4214.7	4206.4
10°	4206.4	4177.5	4128.2	4160.9	4148.7
12.5°	4144.4	4119.9	4070.6	4091.1	4082.8
15°	4074.5	4050.0	3996.3	4012.9	3992.4
17.5°	3988.0	3963.6	3909.9	3930.4	3909.9
20°	3893.3	3868.8	3811.2	3823.4	3807.3
22.5°	3799.0	3761.8	3708.1	3708.1	3699.8
25°	3687.6	3654.9	3585.0	3592.9	3585.0
27.5°	3564.0	3535.2	3481.9	3469.7	3449.2
30°	3440.9	3407.7	3346.1	3333.9	3317.3
32.5°	3309.0	3284.6	3218.6	3193.7	3177.1
35°	3181.5	3140.5	3074.5	3049.6	3029.1
37.5°	3037.4	3000.3	2934.4	2905.5	2885.0
40°	2889.4	2856.2	2790.3	2753.6	2737.0
42.5°	2745.3	2712.1	2646.6	2605.1	2580.7
45°	2589.0	2560.1	2498.1	2453.2	2436.6
47.5°	2436.6	2407.8	2341.8	2296.4	2271.9
50°	2275.9	2255.4	2197.7	2140.1	2119.6
52.5°	2119.6	2090.7	2037.5	1992.0	1963.2
55°	1959.3	1934.4	1885.1	1835.7	1815.2
57.5°	1798.6	1778.1	1724.4	1675.0	1658.4
60°	1637.9	1621.8	1564.1	1518.7	1506.5
62.5°	1481.6	1452.8	1411.7	1370.7	1354.1
65°	1321.3	1296.4	1255.4	1218.3	1197.8
67.5°	1156.7	1135.8	1099.1	1070.3	1053.7
70°	1004.3	987.7	950.6	921.8	905.6
72.5°	848.0	831.4	810.9	782.1	769.8
75°	691.2	683.4	662.4	638.0	646.3
77.5°	551.5	534.9	526.6	514.4	502.2
80°	411.8	407.4	399.1	386.9	378.6
82.5°	279.9	279.9	276.0	259.4	259.4
85°	168.6	164.6	160.7	148.0	144.1
87.5°	74.2	65.9	57.6	45.4	41.0
90°	1.1	13.7	37.4	35.1	36.2
92.5°	23.6	32.0	33.2	34.3	34.3
95°	55.7	66.4	68.3	68.3	66.4
97.5°	92.7	102.6	106.8	106.8	106.8
100°	135.4	144.2	147.2	147.2	146.1
102.5°	180.4	186.9	191.1	192.2	191.1
105°	229.6	232.6	234.9	236.8	236.8
107.5°	278.4	283.0	283.0	283.7	278.4
110°	325.7	331.8	331.8	331.8	328.8



TEST NUMBER: P905540

CATALOG NUMBER: DFN2DIP-HX4F0-110D040US835-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	376.8	383.3	382.1	379.1	376.8
115°	427.1	433.3	431.3	430.2	427.1
117.5°	477.1	485.5	480.2	477.1	474.1
120°	527.5	535.8	527.5	527.5	524.0
122.5°	573.2	583.9	578.6	575.5	573.2
125°	621.3	630.8	627.8	624.3	623.2
127.5°	668.2	680.0	675.8	671.2	668.2
130°	712.0	725.8	723.9	721.6	717.4
132.5°	761.2	771.9	772.7	767.3	764.3
135°	803.6	815.4	817.7	816.5	813.5
137.5°	850.9	860.4	862.3	861.5	857.0
140°	892.4	902.0	907.3	907.3	903.1
142.5°	935.2	944.7	947.7	948.9	944.7
145°	975.6	983.2	989.3	990.5	986.3
147.5°	1011.8	1021.3	1025.9	1027.8	1023.6
150°	1049.2	1055.7	1059.9	1063.3	1059.9
152.5°	1082.4	1088.8	1094.2	1098.4	1094.2
155°	1115.5	1118.6	1122.0	1127.4	1123.9
157.5°	1144.2	1146.4	1148.3	1156.0	1150.6
160°	1169.7	1172.0	1173.1	1179.6	1175.0
162.5°	1193.3	1193.3	1194.5	1201.7	1196.4
165°	1213.6	1212.4	1212.4	1220.0	1214.7
167.5°	1231.9	1228.4	1228.4	1236.1	1230.7
170°	1245.6	1242.5	1241.4	1249.0	1242.5
172.5°	1255.1	1252.1	1250.9	1258.6	1252.1
175°	1262.8	1259.7	1257.4	1265.0	1258.6
177.5°	1267.0	1263.9	1261.6	1268.1	1261.6
180°	1265.0	1265.0	1265.0	1265.0	1265.0



TEST NUMBER: P905540
 CATALOG NUMBER: DFN2DIP-HX4F0-110D040US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.38	14.53	14.08	15.25	16.10	12.95	14.09	13.65	14.82	15.67
	3H	15.06	16.09	15.78	16.82	17.71	14.59	15.62	15.30	16.35	17.24
	4H	15.66	16.63	16.39	17.38	18.28	15.19	16.16	15.92	16.90	17.80
	6H	16.08	16.98	16.82	17.73	18.64	15.60	16.50	16.35	17.25	18.16
	8H	16.19	17.05	16.95	17.82	18.73	15.71	16.57	16.47	17.34	18.26
	12H	16.25	17.07	17.01	17.83	18.77	15.77	16.58	16.53	17.35	18.29
4H	2H	13.87	14.85	14.61	15.59	16.49	13.53	14.50	14.27	15.24	16.14
	3H	15.77	16.58	16.52	17.36	18.27	15.37	16.19	16.12	16.96	17.88
	4H	16.49	17.23	17.26	18.01	18.96	16.09	16.83	16.85	17.61	18.55
	6H	17.02	17.67	17.81	18.47	19.42	16.61	17.26	17.40	18.06	19.01
	8H	17.18	17.78	17.97	18.58	19.55	16.77	17.37	17.56	18.17	19.13
	12H	17.27	17.81	18.08	18.63	19.60	16.85	17.39	17.66	18.21	19.18
8H	4H	16.71	17.31	17.50	18.11	19.08	16.35	16.95	17.14	17.75	18.72
	6H	17.36	17.85	18.17	18.70	19.66	16.99	17.49	17.81	18.33	19.30
	8H	17.58	18.02	18.41	18.86	19.85	17.21	17.65	18.04	18.49	19.48
	12H	17.73	18.12	18.56	18.95	19.99	17.34	17.73	18.17	18.56	19.60
12H	4H	16.71	17.25	17.52	18.07	19.04	16.36	16.90	17.17	17.72	18.69
	6H	17.39	17.83	18.22	18.67	19.65	17.04	17.48	17.87	18.32	19.30
	8H	17.65	18.04	18.48	18.87	19.91	17.29	17.68	18.12	18.51	19.55