

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P927472

Luminaire Tested: DFN2DIP-HX4F0-110D100US835-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P927472
REPORT IS A COMBINATION OF REPORTS P900941 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-110D100US835-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 20790.0 lumens
Efficiency: N/A
Efficacy: 110.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 188.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P927472
CATALOG NUMBER: DFN2DIP-HX4F0-110D100US835-FLLONL

Luminous Intensity Polar Plot

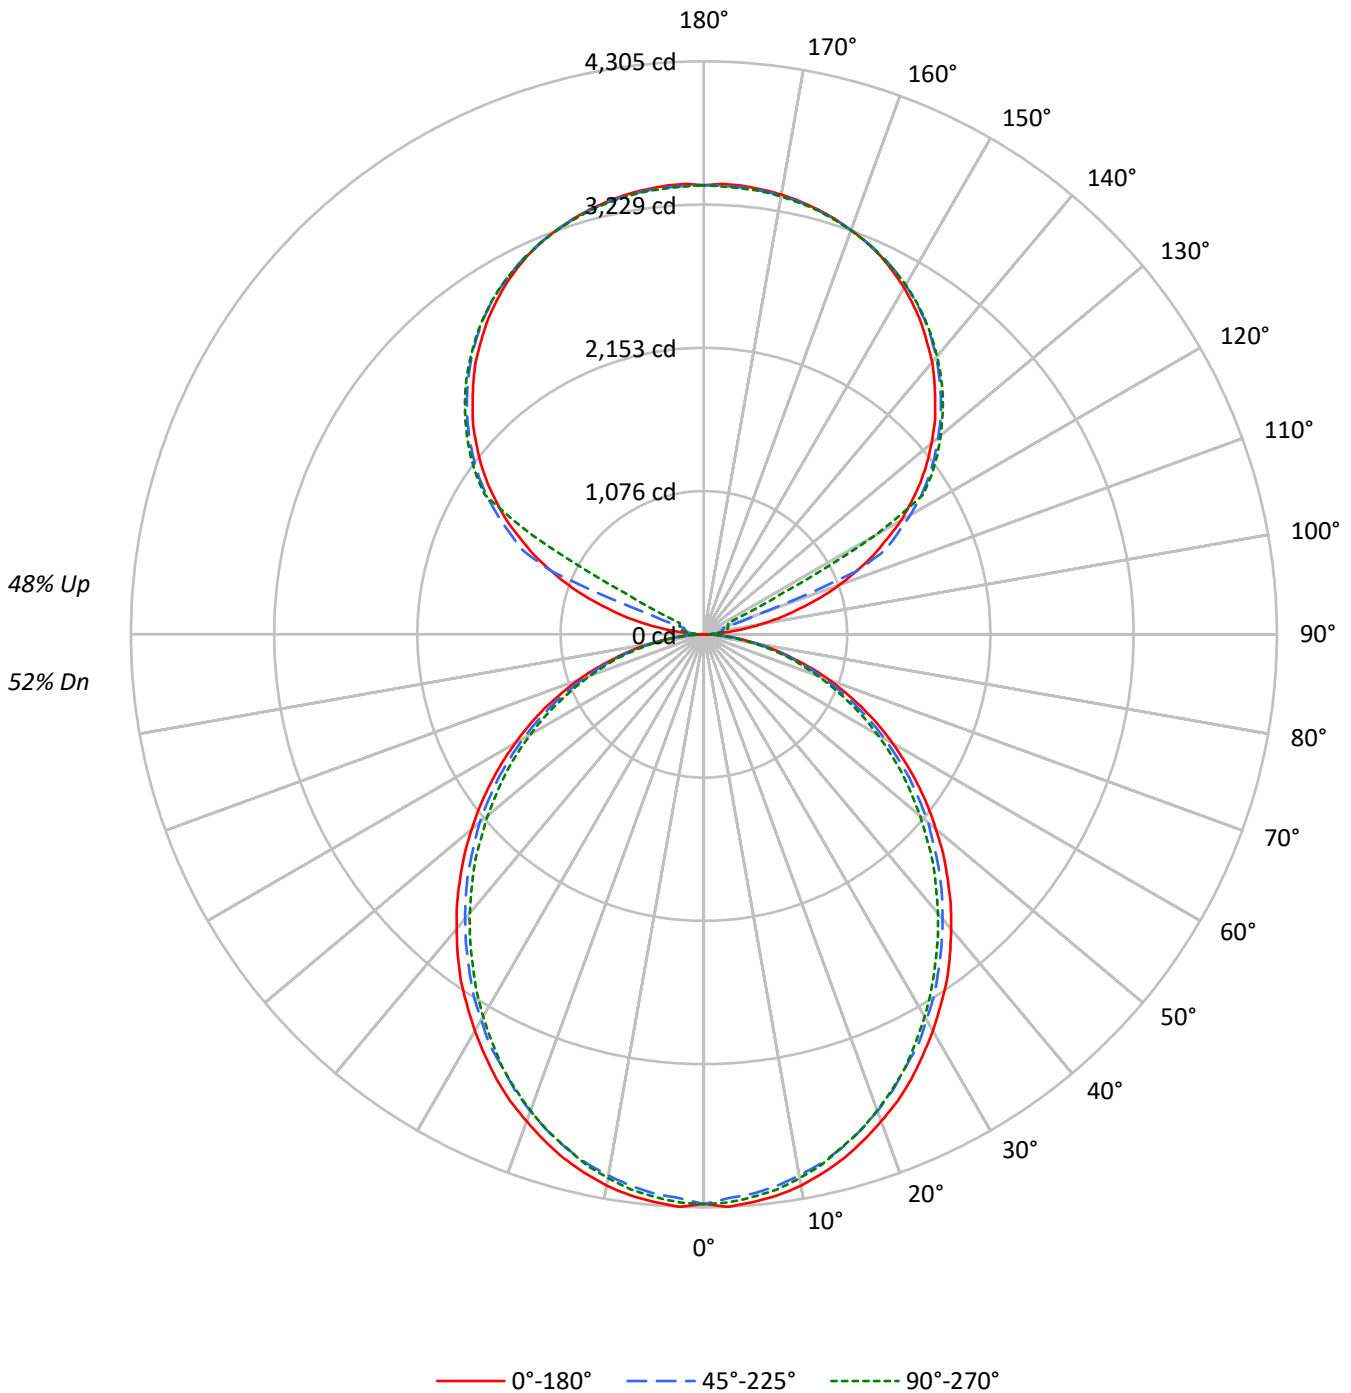



TEST NUMBER: P927472

CATALOG NUMBER: DFN2DIP-HX4F0-110D100US835-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	58	58	58	52	52	52	52
1	98	94	90	87	91	87	84	81	74	72	70	62	61	59	52	50	49	44	44	44	44
2	90	82	76	71	83	76	71	66	65	61	58	55	52	49	45	43	42	37	37	37	37
3	82	72	65	59	75	67	61	55	57	53	48	49	45	42	40	38	35	31	31	31	31
4	75	64	56	50	69	59	52	47	51	46	41	43	39	36	36	33	30	27	27	27	27
5	69	57	49	43	63	53	46	40	46	40	36	39	34	31	32	29	27	23	23	23	23
6	63	51	43	37	58	48	40	35	41	35	31	35	31	27	29	26	23	21	21	21	21
7	58	46	38	33	54	43	36	31	37	32	27	32	27	24	27	23	21	18	18	18	18
8	54	42	34	29	50	39	32	27	34	28	24	29	25	22	25	21	19	16	16	16	16
9	51	38	31	26	47	36	29	24	31	26	22	27	22	19	23	19	17	15	15	15	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	13	13	13	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3183	3183	3183
5°	3188	3139	3160
10°	3162	3097	3117
15°	3116	3046	3050
20°	3054	2975	2982
25°	2991	2891	2903
30°	2913	2812	2803
35°	2839	2720	2696
40°	2748	2626	2595
45°	2657	2533	2492
50°	2558	2434	2372
55°	2454	2320	2262
60°	2337	2185	2136
65°	2209	2045	1987
70°	2046	1875	1827
75°	1820	1671	1680
80°	1549	1411	1397
85°	1124	961	929

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2657 cd/sqm



TEST NUMBER: P927472

CATALOG NUMBER: DFN2DIP-HX4F0-110D100US835-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	402.8	1.9
10°-20°	1133.5	5.5
20°-30°	1665.7	8.0
30°-40°	1934.7	9.3
40°-50°	1932.3	9.3
50°-60°	1684.9	8.1
60°-70°	1245.5	6.0
70°-80°	704.7	3.4
80°-90°	191.9	0.9
90°-100°	111.3	0.5
100°-110°	414.9	2.0
110°-120°	1100.3	5.3
120°-130°	1824.9	8.8
130°-140°	1938.4	9.3
140°-150°	1801.5	8.7
150°-160°	1448.4	7.0
160°-170°	933.3	4.5
170°-180°	321.2	1.5
0°-30°	3202.1	15.4
0°-40°	5136.7	24.7
0°-60°	8753.8	42.1
0°-90°	10895.9	52.4
90°-120°	1626.4	7.8
90°-150°	7191.2	34.6
90°-180°	9894.0	47.6
0°-180°	20790.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4280	4280	4280	4280	4280	
5°	4280	4264	4219	4251	4244	406
15°	4074	4050	3996	4013	3992	1148
25°	3688	3655	3585	3593	3585	1697
35°	3182	3140	3074	3050	3029	1987
45°	2589	2560	2498	2453	2437	1998
55°	1959	1934	1885	1836	1815	1752
65°	1321	1296	1255	1218	1198	1306
75°	691	683	662	638	646	738
85°	169	165	161	148	144	188
90°	2	29	49	61	66	19
95°	159	78	95	108	105	188
105°	742	816	149	176	186	793
115°	1404	1446	1507	376	200	1382
125°	1985	2017	2064	2081	2088	1771
135°	2457	2496	2518	2542	2537	1898
145°	2850	2847	2889	2906	2894	1782
155°	3138	3116	3146	3160	3141	1446
165°	3306	3292	3299	3316	3299	934
175°	3382	3365	3370	3387	3363	322
180°	3375	3375	3375	3375	3375	



TEST NUMBER: P927472

CATALOG NUMBER: DFN2DIP-HX4F0-110D100US835-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4280.2	4280.2	4280.2	4280.2	4280.2
2.5°	4305.0	4284.5	4239.1	4280.2	4272.3
5°	4280.2	4264.0	4218.6	4251.3	4243.5
7.5°	4251.3	4226.9	4181.5	4214.7	4206.4
10°	4206.4	4177.5	4128.2	4160.9	4148.7
12.5°	4144.4	4119.9	4070.6	4091.1	4082.8
15°	4074.5	4050.0	3996.3	4012.9	3992.4
17.5°	3988.0	3963.6	3909.9	3930.4	3909.9
20°	3893.3	3868.8	3811.2	3823.4	3807.3
22.5°	3799.0	3761.8	3708.1	3708.1	3699.8
25°	3687.6	3654.9	3585.0	3592.9	3585.0
27.5°	3564.0	3535.2	3481.9	3469.7	3449.2
30°	3440.9	3407.7	3346.1	3333.9	3317.3
32.5°	3309.0	3284.6	3218.6	3193.7	3177.1
35°	3181.5	3140.5	3074.5	3049.6	3029.1
37.5°	3037.4	3000.3	2934.4	2905.5	2885.0
40°	2889.4	2856.2	2790.3	2753.6	2737.0
42.5°	2745.3	2712.1	2646.6	2605.1	2580.7
45°	2589.0	2560.1	2498.1	2453.2	2436.6
47.5°	2436.6	2407.8	2341.8	2296.4	2271.9
50°	2275.9	2255.4	2197.7	2140.1	2119.6
52.5°	2119.6	2090.7	2037.5	1992.0	1963.2
55°	1959.3	1934.4	1885.1	1835.7	1815.2
57.5°	1798.6	1778.1	1724.4	1675.0	1658.4
60°	1637.9	1621.8	1564.1	1518.7	1506.5
62.5°	1481.6	1452.8	1411.7	1370.7	1354.1
65°	1321.3	1296.4	1255.4	1218.3	1197.8
67.5°	1156.7	1135.8	1099.1	1070.3	1053.7
70°	1004.3	987.7	950.6	921.8	905.6
72.5°	848.0	831.4	810.9	782.1	769.8
75°	691.2	683.4	662.4	638.0	646.3
77.5°	551.5	534.9	526.6	514.4	502.2
80°	411.8	407.4	399.1	386.9	378.6
82.5°	279.9	279.9	276.0	259.4	259.4
85°	168.6	164.6	160.7	148.0	144.1
87.5°	74.2	65.9	57.6	45.4	41.0
90°	2.3	29.3	48.7	61.2	65.8
92.5°	61.2	51.3	58.6	63.5	65.8
95°	158.6	78.0	95.1	107.6	105.0
97.5°	285.6	85.5	124.4	131.9	134.3
100°	432.4	97.7	139.2	158.6	163.6
102.5°	593.3	588.7	144.1	170.8	178.3
105°	742.4	815.7	149.1	175.7	185.6
107.5°	915.8	976.7	154.0	180.7	190.5
110°	1081.9	1133.0	427.4	183.3	192.8



TEST NUMBER: P927472

CATALOG NUMBER: DFN2DIP-HX4F0-110D100US835-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1238.2	1282.0	1240.6	187.9	195.5
115°	1404.1	1445.6	1506.8	376.1	200.4
117.5°	1548.2	1597.0	1638.7	1289.3	649.6
120°	1709.5	1746.0	1790.1	1819.4	1489.7
122.5°	1846.1	1885.2	1934.2	1948.7	1951.3
125°	1985.3	2017.2	2063.6	2080.7	2087.9
127.5°	2112.3	2146.5	2183.3	2207.7	2210.0
130°	2232.0	2271.2	2297.9	2324.8	2322.5
132.5°	2354.1	2386.0	2412.7	2434.7	2432.4
135°	2456.8	2495.9	2517.7	2542.3	2537.4
137.5°	2564.1	2593.4	2618.0	2642.4	2635.1
140°	2669.0	2688.8	2715.4	2737.5	2725.3
142.5°	2757.2	2774.3	2805.9	2825.3	2813.2
145°	2850.0	2847.4	2888.9	2906.0	2893.8
147.5°	2930.3	2923.1	2964.5	2976.7	2967.2
150°	3008.6	2991.5	3030.7	3045.2	3033.0
152.5°	3074.4	3055.0	3091.6	3106.3	3089.2
155°	3138.0	3116.2	3145.5	3160.0	3140.6
157.5°	3189.3	3169.9	3191.9	3209.0	3189.3
160°	3233.4	3218.6	3233.4	3247.9	3230.8
162.5°	3272.2	3257.7	3269.9	3287.0	3265.0
165°	3306.4	3291.9	3299.2	3316.3	3299.2
167.5°	3333.4	3318.6	3326.2	3343.3	3321.2
170°	3355.4	3340.7	3345.6	3362.7	3340.7
172.5°	3369.9	3355.4	3360.4	3377.5	3355.4
175°	3382.1	3365.0	3369.9	3387.1	3362.7
177.5°	3387.1	3369.9	3372.6	3389.7	3367.6
180°	3374.9	3374.9	3374.9	3374.9	3374.9



TEST NUMBER: P927472
 CATALOG NUMBER: DFN2DIP-HX4F0-110D100US835-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.52	12.40	12.45	13.35	14.59	11.08	11.97	12.02	12.92	14.16
	3H	13.18	13.97	14.13	14.93	16.19	12.71	13.50	13.65	14.46	15.72
	4H	13.77	14.52	14.73	15.48	16.75	13.29	14.04	14.26	15.01	16.28
	6H	14.17	14.86	15.14	15.83	17.11	13.69	14.38	14.67	15.36	16.64
	8H	14.28	14.93	15.25	15.92	17.20	13.80	14.46	14.78	15.45	16.73
	12H	14.32	14.95	15.31	15.93	17.24	13.84	14.47	14.83	15.45	16.76
4H	2H	11.98	12.73	12.95	13.70	14.97	11.64	12.39	12.60	13.35	14.62
	3H	13.85	14.48	14.83	15.47	16.75	13.46	14.08	14.43	15.08	16.36
	4H	14.57	15.14	15.55	16.13	17.43	14.16	14.73	15.15	15.72	17.03
	6H	15.08	15.58	16.08	16.59	17.89	14.67	15.17	15.67	16.18	17.48
	8H	15.23	15.69	16.23	16.70	18.02	14.82	15.28	15.82	16.29	17.61
	12H	15.31	15.72	16.33	16.75	18.07	14.89	15.30	15.90	16.32	17.65
8H	4H	14.76	15.22	15.76	16.23	17.55	14.40	14.86	15.40	15.87	17.19
	6H	15.40	15.78	16.42	16.83	18.14	15.04	15.42	16.06	16.46	17.78
	8H	15.62	15.96	16.65	16.99	18.33	15.25	15.59	16.28	16.62	17.96
	12H	15.75	16.05	16.79	17.08	18.46	15.37	15.66	16.40	16.69	18.07
12H	4H	14.75	15.17	15.77	16.19	17.51	14.40	14.82	15.42	15.84	17.16
	6H	15.43	15.76	16.46	16.80	18.14	15.08	15.41	16.11	16.45	17.78
	8H	15.67	15.97	16.71	17.00	18.38	15.32	15.61	16.35	16.64	18.02