

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908163

Luminaire Tested: DFN2DIP-HX4F0-050D050US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908163
REPORT IS A COMBINATION OF REPORTS P899320 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-050D050US840-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8760.6 lumens
Efficiency: N/A
Efficacy: 121.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 72.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908163

CATALOG NUMBER: DFN2DIP-HX4F0-050D050US840-RLLFLL

Luminous Intensity Polar Plot

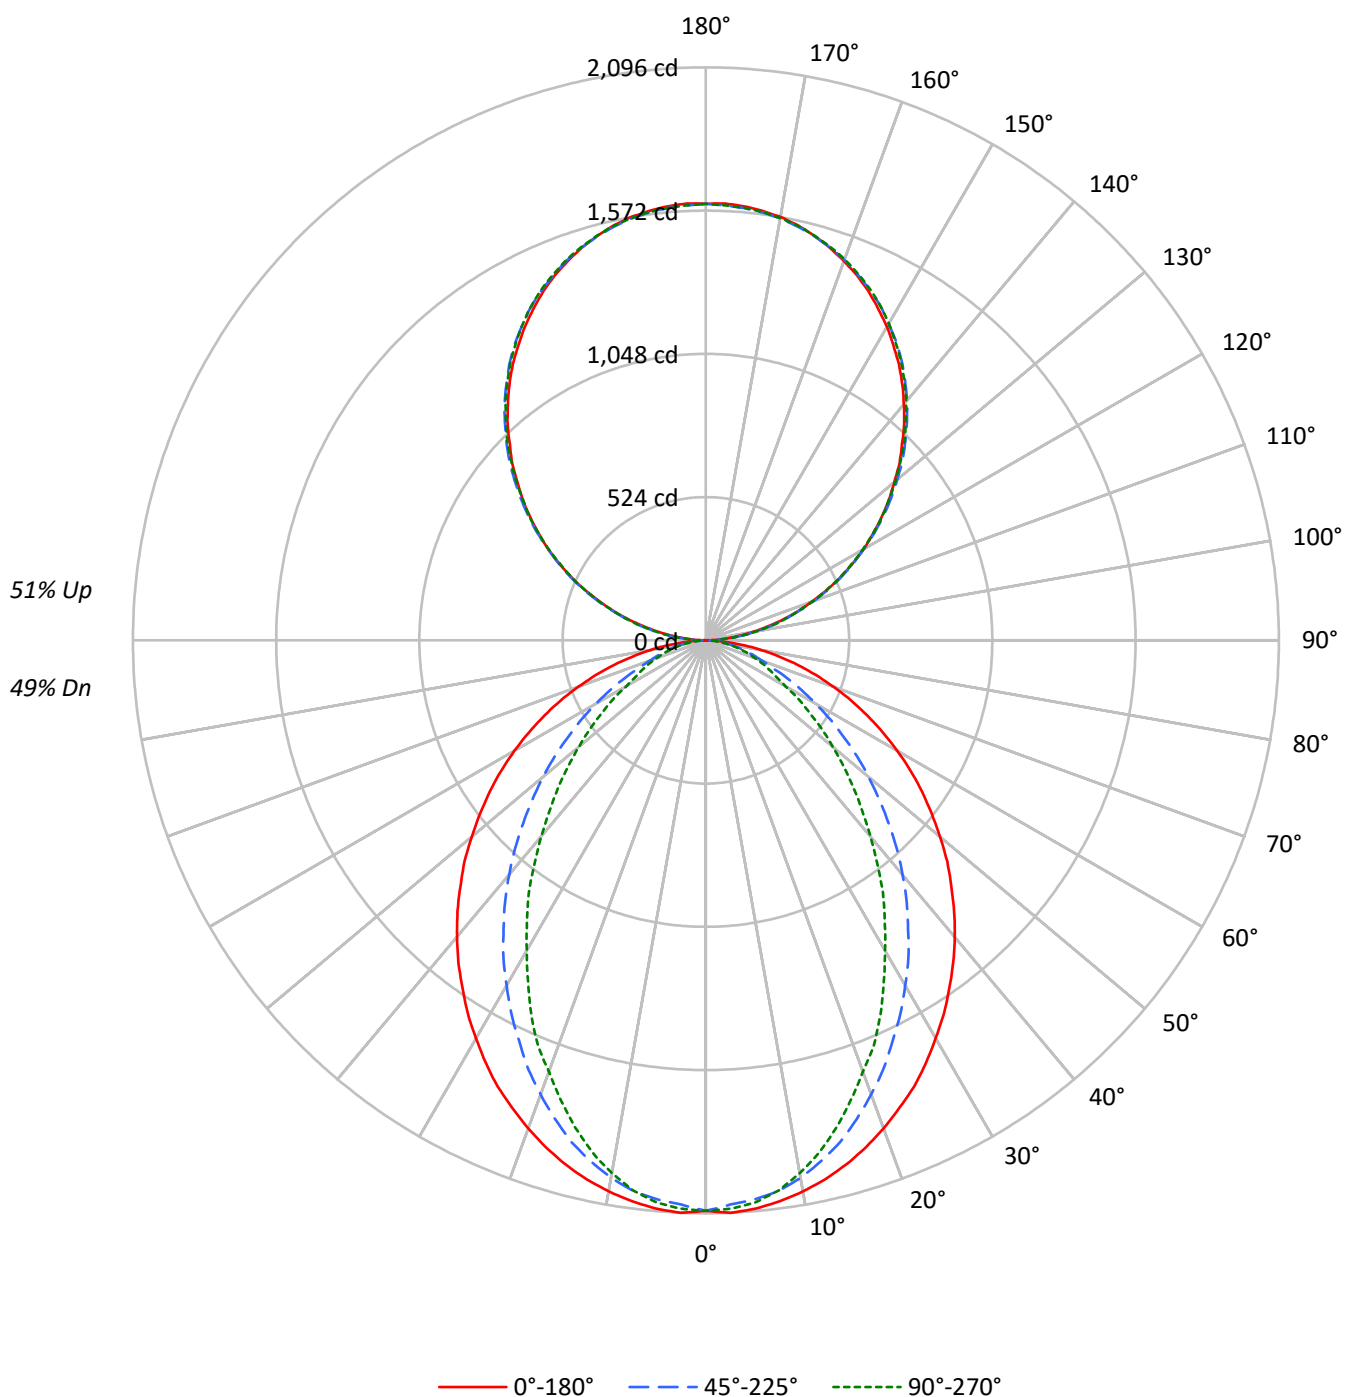

TEST NUMBER: P908163

CATALOG NUMBER: DFN2DIP-HX4F0-050D050US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1552	1552	1552
5°	1554	1527	1537
10°	1539	1497	1487
15°	1518	1448	1410
20°	1490	1380	1315
25°	1462	1304	1223
30°	1423	1225	1107
35°	1386	1141	1005
40°	1347	1054	888
45°	1303	957	782
50°	1257	860	679
55°	1209	755	579
60°	1153	646	477
65°	1089	535	429
70°	1012	432	389
75°	915	381	353
80°	774	320	307
85°	541	215	232

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1303 cd/sqm

TEST NUMBER: P908163

CATALOG NUMBER: DFN2DIP-HX4F0-050D050US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.6	2.2
10°-20°	536.9	6.1
20°-30°	753.8	8.6
30°-40°	821.7	9.4
40°-50°	755.2	8.6
50°-60°	593.1	6.8
60°-70°	386.1	4.4
70°-80°	198.7	2.3
80°-90°	55.3	0.6
90°-100°	98.8	1.1
100°-110°	314.0	3.6
110°-120°	537.3	6.1
120°-130°	706.6	8.1
130°-140°	793.2	9.1
140°-150°	777.8	8.9
150°-160°	652.5	7.4
160°-170°	432.7	4.9
170°-180°	151.2	1.7
0°-30°	1486.3	17.0
0°-40°	2308.0	26.3
0°-60°	3656.4	41.7
0°-90°	4296.5	49.0
90°-120°	950.1	10.8
90°-150°	3227.7	36.8
90°-180°	4464.0	51.0
0°-180°	8760.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2087	2087	2087	2087	2087	
5°	2087	2078	2053	2070	2064	198
15°	1985	1964	1900	1864	1845	559
25°	1802	1741	1617	1539	1511	829
35°	1552	1456	1290	1171	1129	972
45°	1269	1143	944	810	765	980
55°	965	818	614	500	465	862
65°	652	499	329	264	259	646
75°	348	215	151	138	136	368
85°	81	42	36	36	36	93
90°	1	17	47	44	46	9
95°	70	84	86	86	84	78
105°	290	294	297	299	299	306
115°	539	547	544	543	539	533
125°	784	796	792	788	787	701
135°	1014	1029	1032	1031	1027	784
145°	1232	1241	1249	1250	1245	769
155°	1408	1412	1416	1423	1419	648
165°	1532	1530	1530	1540	1533	432
175°	1594	1590	1587	1597	1589	151
180°	1597	1597	1597	1597	1597	

TEST NUMBER: P908163

CATALOG NUMBER: DFN2DIP-HX4F0-050D050US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2086.9	2086.9	2086.9	2086.9	2086.9
2.5°	2096.3	2086.9	2066.1	2085.1	2081.2
5°	2086.9	2077.5	2052.9	2069.8	2064.3
7.5°	2069.8	2058.6	2032.2	2039.6	2030.1
10°	2047.2	2034.0	1996.3	1990.5	1979.2
12.5°	2018.9	2002.0	1950.9	1939.6	1918.7
15°	1984.9	1964.1	1900.0	1864.1	1845.2
17.5°	1945.2	1915.0	1835.6	1794.1	1763.8
20°	1900.0	1862.1	1767.7	1720.6	1678.9
22.5°	1850.9	1807.4	1697.8	1633.7	1605.4
25°	1801.7	1741.2	1616.6	1539.2	1510.8
27.5°	1743.2	1678.9	1541.1	1452.3	1408.9
30°	1680.9	1609.0	1457.9	1361.7	1310.6
32.5°	1620.4	1533.5	1378.8	1265.4	1218.1
35°	1552.5	1456.1	1290.0	1170.9	1129.3
37.5°	1486.3	1382.4	1206.9	1076.4	1029.4
40°	1416.4	1303.2	1119.8	985.8	936.8
42.5°	1344.7	1223.9	1033.1	893.2	846.2
45°	1269.2	1142.6	944.3	810.1	764.8
47.5°	1197.4	1063.4	859.4	725.2	683.7
50°	1118.1	984.0	776.3	645.8	606.3
52.5°	1040.6	898.9	696.9	572.3	536.4
55°	965.0	817.7	613.7	500.5	464.6
57.5°	887.7	736.6	540.2	434.4	404.1
60°	808.3	657.2	462.6	366.5	336.2
62.5°	730.9	579.9	396.6	306.0	290.9
65°	651.6	498.6	328.6	264.5	258.7
67.5°	576.0	423.0	264.5	232.3	226.6
70°	496.8	349.4	219.0	200.2	192.6
72.5°	421.2	281.3	183.2	168.1	164.3
75°	347.5	215.2	151.1	137.8	136.0
77.5°	273.9	152.9	119.1	111.4	107.6
80°	205.8	109.6	90.6	83.1	83.1
82.5°	143.5	73.7	62.3	58.5	58.5
85°	81.2	41.5	35.9	35.9	35.9
87.5°	30.3	15.0	15.0	13.2	13.2
90°	1.4	17.4	47.2	44.3	45.7
92.5°	29.9	40.4	41.9	43.3	43.3
95°	70.3	83.8	86.1	86.1	83.8
97.5°	116.9	129.5	134.8	134.8	134.8
100°	170.9	182.0	185.8	185.8	184.4
102.5°	227.7	235.9	241.2	242.7	241.2
105°	289.8	293.7	296.6	298.9	298.9
107.5°	351.4	357.2	357.2	358.2	351.4
110°	411.1	418.9	418.9	418.9	415.0

TEST NUMBER: P908163

CATALOG NUMBER: DFN2DIP-HX4F0-050D050US840-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	475.6	483.8	482.4	478.6	475.6
115°	539.2	546.9	544.5	543.1	539.2
117.5°	602.3	612.9	606.1	602.3	598.4
120°	665.8	676.4	665.8	665.8	661.5
122.5°	723.6	737.1	730.3	726.5	723.6
125°	784.3	796.3	792.4	788.1	786.7
127.5°	843.4	858.4	853.1	847.3	843.4
130°	898.9	916.2	913.7	910.9	905.5
132.5°	961.0	974.4	975.4	968.7	964.8
135°	1014.4	1029.3	1032.2	1030.8	1026.9
137.5°	1074.1	1086.1	1088.5	1087.5	1081.8
140°	1126.5	1138.6	1145.3	1145.3	1140.0
142.5°	1180.4	1192.6	1196.4	1197.8	1192.6
145°	1231.5	1241.1	1248.8	1250.3	1245.0
147.5°	1277.3	1289.3	1295.1	1297.5	1292.1
150°	1324.4	1332.6	1337.9	1342.2	1337.9
152.5°	1366.3	1374.5	1381.2	1386.5	1381.2
155°	1408.2	1412.0	1416.3	1423.1	1418.8
157.5°	1444.3	1447.1	1449.6	1459.3	1452.5
160°	1476.5	1479.5	1480.9	1489.0	1483.3
162.5°	1506.4	1506.4	1507.8	1517.0	1510.3
165°	1532.0	1530.5	1530.5	1540.1	1533.4
167.5°	1555.0	1550.6	1550.6	1560.3	1553.6
170°	1572.4	1568.5	1567.1	1576.7	1568.5
172.5°	1584.4	1580.5	1579.1	1588.7	1580.5
175°	1594.1	1590.1	1587.3	1596.9	1588.7
177.5°	1599.3	1595.5	1592.6	1600.7	1592.6
180°	1596.9	1596.9	1596.9	1596.9	1596.9

TEST NUMBER: P908163

CATALOG NUMBER: DFN2DIP-HX4F0-050D050US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.58	9.41	9.55	10.39	11.67	4.56	5.38	5.53	6.36	7.65
	3H	10.26	11.00	11.24	11.99	13.30	5.75	6.48	6.73	7.47	8.78
	4H	10.87	11.56	11.87	12.56	13.88	6.20	6.89	7.19	7.89	9.20
	6H	11.29	11.93	12.30	12.93	14.26	6.52	7.16	7.53	8.16	9.49
	8H	11.42	12.03	12.43	13.04	14.37	6.61	7.22	7.62	8.23	9.56
	12H	11.48	12.06	12.50	13.07	14.42	6.65	7.23	7.67	8.24	9.59
4H	2H	8.60	9.30	9.60	10.29	11.61	5.15	5.85	6.15	6.84	8.16
	3H	10.43	11.01	11.44	12.03	13.36	6.50	7.08	7.51	8.10	9.43
	4H	11.12	11.65	12.14	12.67	14.02	7.05	7.58	8.07	8.59	9.95
	6H	11.64	12.09	12.67	13.13	14.48	7.47	7.93	8.50	8.96	10.32
	8H	11.81	12.24	12.84	13.27	14.64	7.60	8.02	8.63	9.06	10.42
	12H	11.91	12.29	12.96	13.34	14.71	7.67	8.05	8.72	9.10	10.47
8H	4H	11.09	11.51	12.12	12.55	13.91	7.33	7.75	8.36	8.79	10.15
	6H	11.66	12.01	12.71	13.08	14.44	7.85	8.20	8.91	9.27	10.64
	8H	11.87	12.18	12.94	13.24	14.62	8.04	8.35	9.11	9.41	10.79
	12H	12.01	12.28	13.08	13.34	14.76	8.16	8.43	9.23	9.49	10.91
12H	4H	11.04	11.42	12.09	12.47	13.84	7.34	7.72	8.38	8.77	10.14
	6H	11.63	11.94	12.69	13.00	14.38	7.90	8.21	8.96	9.27	10.65
	8H	11.85	12.12	12.92	13.18	14.60	8.11	8.38	9.18	9.44	10.86