

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P927572

Luminaire Tested: DFN2DIP-HX4F0-050D080US840-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P927572
REPORT IS A COMBINATION OF REPORTS P900893 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-050D080US840-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12996.1 lumens
Efficiency: N/A
Efficacy: 127.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 102
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P927572

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US840-FLLONL

Luminous Intensity Polar Plot

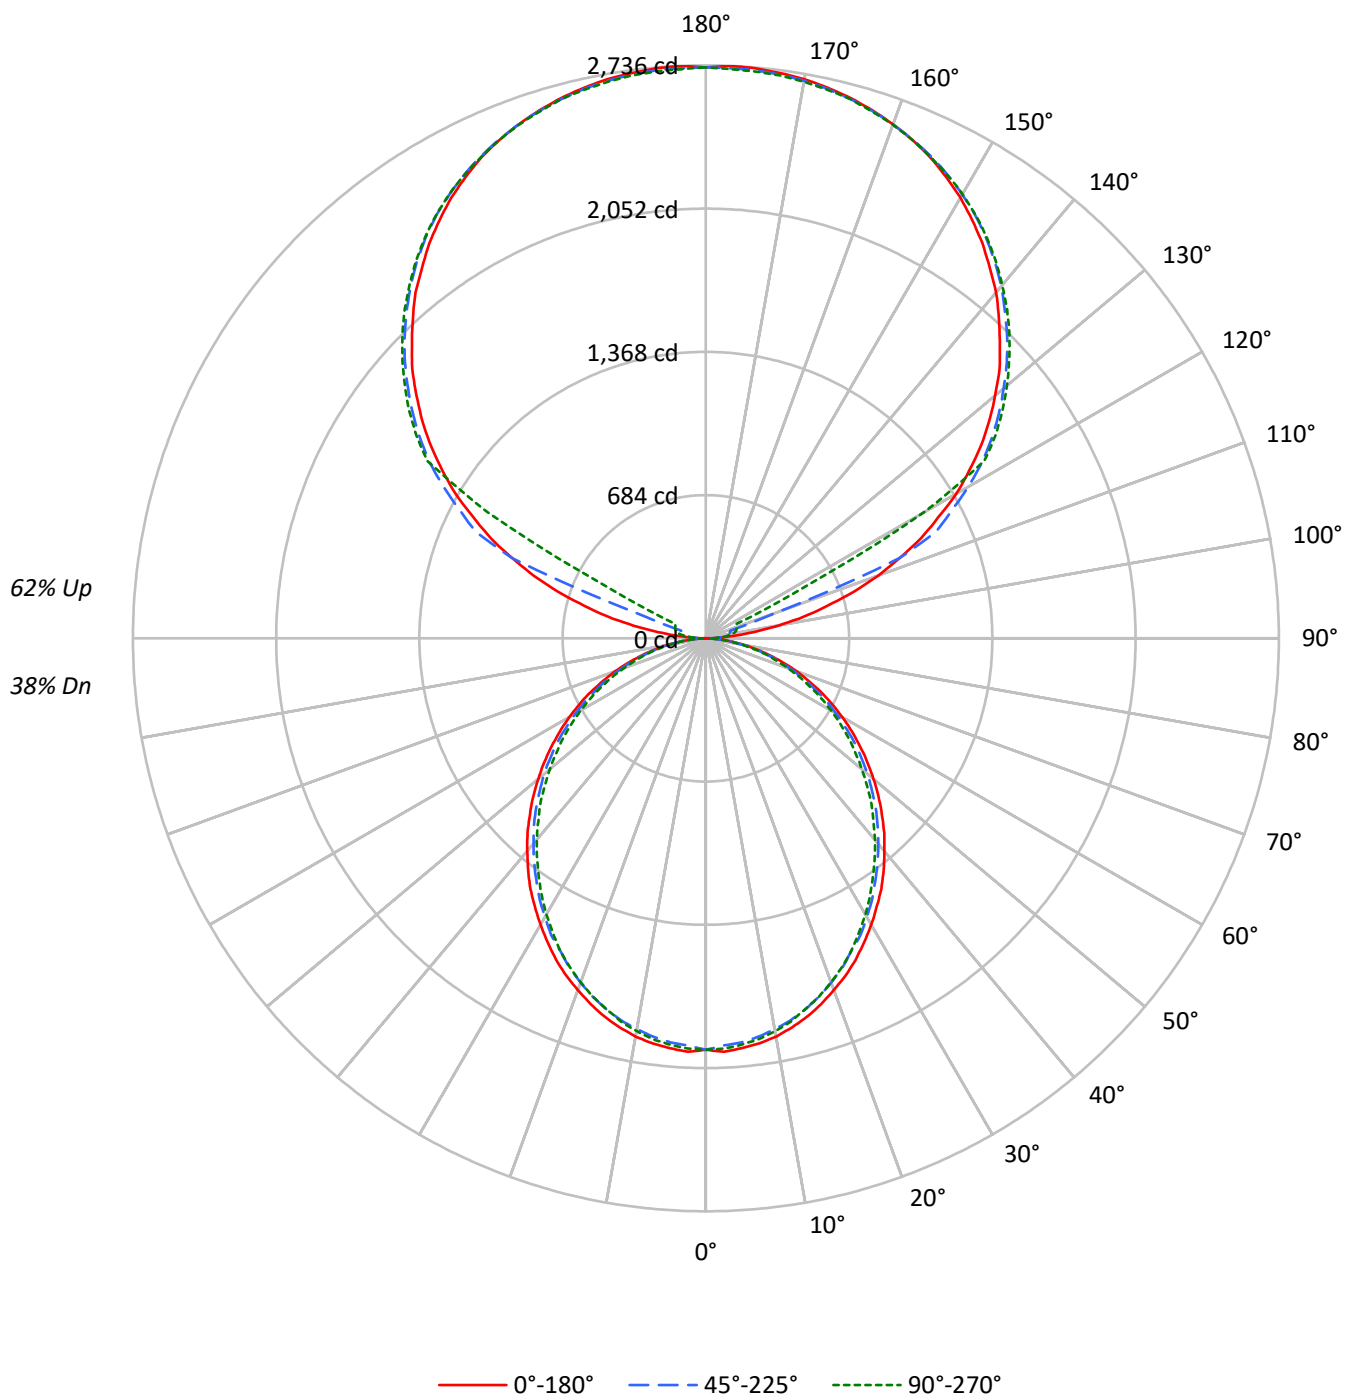

TEST NUMBER: P927572

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US840-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46
1	95	91	87	84	86	83	80	77	67	65	63	53	52	50	40	39	38
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32
3	79	70	63	57	71	64	57	52	52	48	44	41	38	36	31	29	28
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	20	18
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	16	14
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13
10	45	33	26	22	41	31	25	20	26	21	17	21	17	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1461	1461	1461
5°	1463	1441	1450
10°	1451	1421	1431
15°	1430	1398	1400
20°	1402	1366	1369
25°	1373	1327	1332
30°	1337	1291	1286
35°	1303	1248	1238
40°	1261	1205	1191
45°	1220	1162	1144
50°	1174	1117	1089
55°	1126	1065	1038
60°	1073	1003	980
65°	1014	939	912
70°	939	860	839
75°	835	767	771
80°	711	648	641
85°	516	441	426

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1401 cd/sqm

TEST NUMBER: P927572

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US840-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	184.9	1.4
10°-20°	520.3	4.0
20°-30°	764.6	5.9
30°-40°	888.0	6.8
40°-50°	886.9	6.8
50°-60°	773.4	6.0
60°-70°	571.7	4.4
70°-80°	323.4	2.5
80°-90°	90.2	0.7
90°-100°	89.9	0.7
100°-110°	335.1	2.6
110°-120°	888.8	6.8
120°-130°	1474.2	11.3
130°-140°	1565.9	12.0
140°-150°	1455.3	11.2
150°-160°	1170.1	9.0
160°-170°	754.0	5.8
170°-180°	259.5	2.0
0°-30°	1469.7	11.3
0°-40°	2357.8	18.1
0°-60°	4018.0	30.9
0°-90°	5003.3	38.5
90°-120°	1313.9	10.1
90°-150°	5809.3	44.7
90°-180°	7993.0	61.5
0°-180°	12996.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1965	1965	1965	1965	1965	
5°	1965	1957	1936	1951	1948	186
15°	1870	1859	1834	1842	1832	527
25°	1693	1678	1646	1649	1646	779
35°	1460	1442	1411	1400	1390	912
45°	1188	1175	1147	1126	1118	917
55°	899	888	865	843	833	804
65°	606	595	576	559	550	600
75°	317	314	304	293	297	339
85°	77	76	74	68	66	86
90°	2	24	39	49	53	12
95°	128	63	77	87	85	152
105°	600	659	120	142	150	641
115°	1134	1168	1217	304	162	1117
125°	1604	1630	1667	1681	1687	1430
135°	1985	2016	2034	2054	2050	1533
145°	2302	2300	2334	2348	2338	1440
155°	2535	2517	2541	2553	2537	1168
165°	2671	2659	2665	2679	2665	755
175°	2732	2718	2722	2736	2717	260
180°	2726	2726	2726	2726	2726	

TEST NUMBER: P927572

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US840-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1964.6	1964.6	1964.6	1964.6	1964.6
2.5°	1976.0	1966.6	1945.8	1964.6	1961.0
5°	1964.6	1957.2	1936.3	1951.3	1947.8
7.5°	1951.3	1940.1	1919.3	1934.6	1930.7
10°	1930.7	1917.5	1894.9	1909.8	1904.3
12.5°	1902.3	1891.1	1868.4	1877.8	1874.0
15°	1870.1	1858.9	1834.3	1842.0	1832.5
17.5°	1830.5	1819.3	1794.6	1804.0	1794.6
20°	1787.0	1775.8	1749.4	1754.9	1747.6
22.5°	1743.7	1726.7	1702.0	1702.0	1698.2
25°	1692.6	1677.6	1645.5	1649.1	1645.5
27.5°	1635.9	1622.6	1598.2	1592.6	1583.2
30°	1579.3	1564.2	1535.9	1530.3	1522.7
32.5°	1518.8	1507.6	1477.3	1465.9	1458.4
35°	1460.3	1441.5	1411.2	1399.8	1390.4
37.5°	1394.1	1377.2	1346.9	1333.6	1324.3
40°	1326.3	1311.0	1280.7	1263.9	1256.3
42.5°	1260.1	1244.9	1214.8	1195.7	1184.5
45°	1188.3	1175.1	1146.6	1126.0	1118.4
47.5°	1118.4	1105.1	1074.9	1054.0	1042.8
50°	1044.6	1035.2	1008.8	982.3	972.8
52.5°	972.8	959.6	935.2	914.4	901.1
55°	899.3	887.9	865.2	842.6	833.2
57.5°	825.5	816.1	791.5	768.9	761.2
60°	751.8	744.4	718.0	697.1	691.5
62.5°	680.1	666.9	648.0	629.1	621.5
65°	606.5	595.1	576.2	559.2	549.7
67.5°	531.0	521.4	504.5	491.3	483.6
70°	461.0	453.4	436.3	423.1	415.7
72.5°	389.3	381.6	372.2	359.0	353.3
75°	317.3	313.6	304.1	292.8	296.7
77.5°	253.2	245.5	241.7	236.1	230.5
80°	189.0	187.0	183.2	177.6	173.8
82.5°	128.4	128.4	126.6	119.1	119.1
85°	77.4	75.5	73.7	68.0	66.1
87.5°	34.0	30.3	26.5	20.8	18.9
90°	1.9	23.6	39.4	49.4	53.2
92.5°	49.4	41.5	47.4	51.3	53.2
95°	128.1	63.0	76.8	86.9	84.8
97.5°	230.7	69.1	100.5	106.6	108.5
100°	349.3	79.0	112.5	128.1	132.1
102.5°	479.4	475.5	116.4	137.9	144.1
105°	599.7	659.0	120.4	142.0	150.0
107.5°	739.8	789.0	124.4	145.9	153.9
110°	874.1	915.3	345.4	148.0	155.8

TEST NUMBER: P927572

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US840-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1000.3	1035.7	1002.2	151.8	157.9
115°	1134.3	1167.8	1217.2	303.8	161.9
117.5°	1250.7	1290.1	1323.8	1041.5	524.8
120°	1381.0	1410.5	1446.1	1469.8	1203.4
122.5°	1491.3	1523.0	1562.6	1574.3	1576.4
125°	1603.8	1629.5	1667.0	1680.8	1686.7
127.5°	1706.4	1734.0	1763.8	1783.4	1785.3
130°	1803.1	1834.7	1856.3	1878.1	1876.2
132.5°	1901.8	1927.5	1949.1	1966.9	1965.0
135°	1984.7	2016.3	2033.8	2053.8	2049.8
137.5°	2071.4	2095.0	2114.9	2134.6	2128.8
140°	2156.1	2172.1	2193.7	2211.5	2201.6
142.5°	2227.4	2241.2	2266.7	2282.5	2272.6
145°	2302.3	2300.2	2333.7	2347.6	2337.7
147.5°	2367.3	2361.4	2394.8	2404.7	2397.0
150°	2430.5	2416.7	2448.3	2460.0	2450.2
152.5°	2483.7	2468.0	2497.4	2509.5	2495.6
155°	2535.0	2517.4	2541.1	2552.8	2537.1
157.5°	2576.4	2560.8	2578.5	2592.4	2576.4
160°	2612.0	2600.1	2612.0	2623.8	2609.9
162.5°	2643.5	2631.7	2641.5	2655.4	2637.6
165°	2671.1	2659.4	2665.3	2679.0	2665.3
167.5°	2692.8	2680.9	2687.0	2700.8	2683.0
170°	2710.7	2698.7	2702.7	2716.6	2698.7
172.5°	2722.4	2710.7	2714.6	2728.5	2710.7
175°	2732.2	2718.4	2722.4	2736.2	2716.6
177.5°	2736.2	2722.4	2724.4	2738.3	2720.5
180°	2726.4	2726.4	2726.4	2726.4	2726.4

TEST NUMBER: P927572

CATALOG NUMBER: DFN2DIP-HX4F0-050D080US840-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.42	8.19	8.47	9.24	10.67	6.99	7.76	8.04	8.81	10.24
	3H	9.08	9.76	10.14	10.83	12.27	8.60	9.29	9.66	10.35	11.80
	4H	9.66	10.31	10.73	11.38	12.83	9.19	9.84	10.26	10.90	12.36
	6H	10.06	10.66	11.14	11.73	13.19	9.58	10.18	10.66	11.25	12.71
	8H	10.16	10.73	11.24	11.81	13.27	9.68	10.25	10.77	11.34	12.80
	12H	10.20	10.75	11.29	11.83	13.31	9.72	10.27	10.81	11.34	12.83
4H	2H	7.87	8.52	8.95	9.59	11.04	7.53	8.18	8.61	9.25	10.70
	3H	9.73	10.28	10.82	11.37	12.83	9.34	9.88	10.42	10.98	12.44
	4H	10.44	10.94	11.53	12.02	13.51	10.04	10.54	11.13	11.62	13.11
	6H	10.95	11.38	12.05	12.49	13.97	10.54	10.97	11.64	12.08	13.56
	8H	11.10	11.50	12.20	12.60	14.10	10.69	11.09	11.79	12.19	13.68
	12H	11.17	11.53	12.29	12.64	14.14	10.75	11.11	11.86	12.22	13.72
8H	4H	10.63	11.03	11.73	12.13	13.63	10.27	10.67	11.37	11.77	13.27
	6H	11.26	11.59	12.38	12.73	14.22	10.90	11.23	12.02	12.37	13.86
	8H	11.48	11.77	12.61	12.89	14.40	11.11	11.40	12.24	12.52	14.04
	12H	11.61	11.86	12.74	12.98	14.53	11.23	11.48	12.36	12.60	14.15
12H	4H	10.61	10.98	11.73	12.09	13.59	10.26	10.62	11.38	11.73	13.24
	6H	11.29	11.58	12.42	12.70	14.21	10.94	11.23	12.07	12.35	13.86
	8H	11.53	11.78	12.66	12.90	14.45	11.17	11.43	12.30	12.54	14.09