

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908267

Luminaire Tested: DFN2DIP-HX4F0-100D120US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908267
REPORT IS A COMBINATION OF REPORTS P899456 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-100D120US840-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 19308.6 lumens
Efficiency: N/A
Efficacy: 111.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 172.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.946
Total Harmonic Distortion (THDi): 0.132
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908267

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US840-RLLFLL

Luminous Intensity Polar Plot

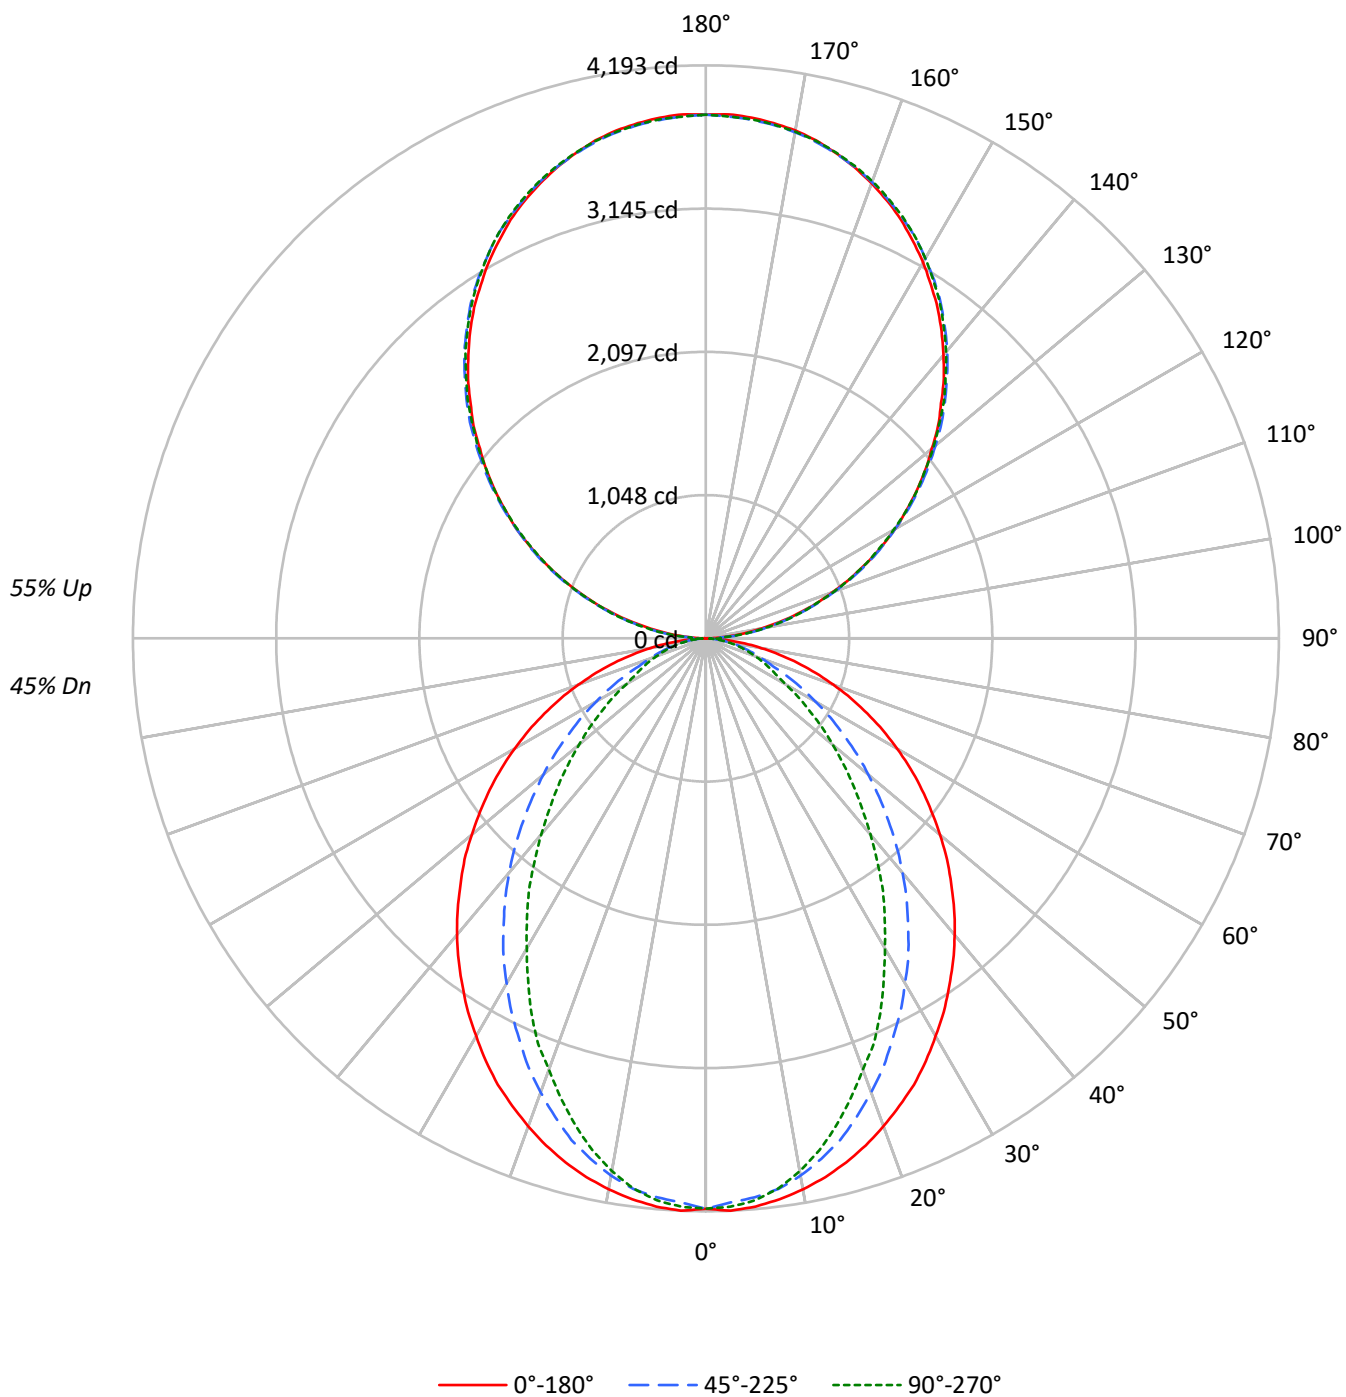

TEST NUMBER: P908267

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51
1	97	93	89	86	89	85	82	79	71	69	67	58	56	55	46	45	44
2	89	82	76	71	81	75	70	66	63	59	56	51	49	47	41	39	38
3	81	72	65	59	74	66	60	55	56	51	47	46	43	40	37	34	33
4	74	64	56	51	68	59	52	47	50	45	41	41	37	35	33	30	28
5	68	57	49	44	63	53	46	41	45	39	35	37	33	30	30	27	25
6	63	51	44	38	58	48	41	36	40	35	31	34	30	27	27	24	22
7	58	47	39	33	54	43	36	31	37	31	28	31	27	24	25	22	20
8	54	42	35	30	50	39	33	28	34	28	25	28	24	21	23	20	18
9	51	39	31	27	46	36	29	25	31	26	22	26	22	19	21	18	16
10	47	36	29	24	43	33	27	23	28	23	20	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3103	3103	3103
5°	3109	3054	3074
10°	3078	2995	2974
15°	3036	2896	2820
20°	2980	2760	2630
25°	2923	2607	2447
30°	2846	2451	2215
35°	2771	2282	2010
40°	2694	2108	1776
45°	2605	1915	1564
50°	2513	1720	1357
55°	2418	1511	1158
60°	2306	1293	953
65°	2179	1071	858
70°	2024	864	777
75°	1829	762	707
80°	1547	641	614
85°	1082	429	462

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2891 cd/sqm

TEST NUMBER: P908267

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	391.2	2.0
10°-20°	1073.8	5.6
20°-30°	1507.6	7.8
30°-40°	1643.4	8.5
40°-50°	1510.5	7.8
50°-60°	1186.3	6.1
60°-70°	772.1	4.0
70°-80°	397.5	2.1
80°-90°	112.4	0.6
90°-100°	237.2	1.2
100°-110°	753.5	3.9
110°-120°	1289.5	6.7
120°-130°	1696.0	8.8
130°-140°	1903.6	9.9
140°-150°	1866.7	9.7
150°-160°	1565.9	8.1
160°-170°	1038.5	5.4
170°-180°	363.0	1.9
0°-30°	2972.6	15.4
0°-40°	4616.1	23.9
0°-60°	7312.8	37.9
0°-90°	8594.7	44.5
90°-120°	2280.2	11.8
90°-150°	7746.5	40.1
90°-180°	10714.0	55.5
0°-180°	19308.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4174	4174	4174	4174	4174	
5°	4174	4155	4106	4140	4128	396
15°	3970	3928	3800	3728	3690	1119
25°	3604	3482	3233	3078	3022	1657
35°	3105	2912	2580	2342	2259	1943
45°	2538	2285	1889	1620	1530	1960
55°	1930	1636	1228	1001	929	1725
65°	1303	997	657	529	517	1292
75°	695	430	302	276	272	735
85°	162	83	72	72	72	186
90°	3	42	113	106	110	19
95°	169	201	207	207	201	188
105°	696	705	712	718	718	734
115°	1294	1313	1307	1303	1294	1280
125°	1882	1911	1902	1892	1888	1682
135°	2434	2470	2477	2474	2465	1882
145°	2956	2979	2997	3001	2988	1847
155°	3380	3389	3399	3416	3405	1556
165°	3677	3673	3673	3696	3680	1037
175°	3826	3816	3810	3832	3813	363
180°	3832	3832	3832	3832	3832	

TEST NUMBER: P908267

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4173.8	4173.8	4173.8	4173.8	4173.8
2.5°	4192.6	4173.8	4132.1	4170.1	4162.6
5°	4173.8	4154.9	4105.6	4139.7	4128.4
7.5°	4139.7	4117.2	4064.3	4079.1	4060.4
10°	4094.4	4067.9	3992.6	3981.0	3958.6
12.5°	4037.9	4003.8	3901.6	3879.2	3837.5
15°	3969.8	3928.1	3799.8	3728.1	3690.5
17.5°	3890.4	3829.9	3671.3	3588.3	3527.8
20°	3799.8	3724.1	3535.3	3441.2	3357.8
22.5°	3701.7	3614.7	3395.5	3267.3	3210.8
25°	3603.5	3482.5	3233.2	3078.5	3021.6
27.5°	3486.5	3357.8	3082.1	2904.6	2817.6
30°	3361.8	3217.9	2915.8	2723.5	2621.3
32.5°	3240.9	3066.9	2757.5	2530.7	2436.1
35°	3104.9	2912.3	2580.0	2342.0	2258.6
37.5°	2972.7	2764.7	2413.7	2152.8	2058.6
40°	2832.9	2606.5	2239.8	1971.7	1873.5
42.5°	2689.4	2447.7	2066.3	1786.6	1692.3
45°	2538.3	2285.0	1888.8	1620.2	1529.6
47.5°	2394.9	2126.8	1718.8	1450.3	1367.4
50°	2236.1	1968.0	1552.5	1291.6	1212.6
52.5°	2081.0	1797.8	1393.8	1144.5	1072.8
55°	1930.0	1635.5	1227.5	1001.1	929.3
57.5°	1775.3	1473.1	1080.5	868.8	808.3
60°	1616.6	1314.4	925.3	733.0	672.5
62.5°	1461.9	1159.7	793.0	612.0	581.9
65°	1303.2	997.0	657.2	529.0	517.4
67.5°	1152.2	846.0	529.0	464.4	453.2
70°	993.4	698.9	438.0	400.3	385.2
72.5°	842.3	562.6	366.3	336.2	328.6
75°	694.9	430.4	302.2	275.7	272.1
77.5°	547.9	305.8	238.0	222.8	215.2
80°	411.5	219.2	181.2	166.3	166.3
82.5°	286.9	147.4	124.6	117.0	117.0
85°	162.3	82.9	71.7	71.7	71.7
87.5°	60.5	30.1	30.1	26.5	26.5
90°	3.4	41.6	113.2	106.3	109.8
92.5°	71.6	97.0	100.5	104.0	104.0
95°	168.6	201.1	206.8	206.8	201.1
97.5°	280.7	310.8	323.6	323.6	323.6
100°	410.2	436.8	446.0	446.0	442.5
102.5°	546.5	566.1	578.9	582.4	578.9
105°	695.6	704.8	711.8	717.5	717.5
107.5°	843.4	857.4	857.4	859.6	843.4
110°	986.7	1005.2	1005.2	1005.2	996.0

TEST NUMBER: P908267

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US840-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1141.6	1161.2	1157.7	1148.5	1141.6
115°	1294.0	1312.6	1306.8	1303.3	1294.0
117.5°	1445.4	1470.9	1454.7	1445.4	1436.2
120°	1598.0	1623.4	1598.0	1598.0	1587.6
122.5°	1736.7	1769.0	1752.8	1743.5	1736.7
125°	1882.2	1911.1	1901.9	1891.5	1887.9
127.5°	2024.4	2060.1	2047.4	2033.6	2024.4
130°	2157.2	2198.8	2193.0	2186.1	2173.3
132.5°	2306.2	2338.6	2340.9	2324.7	2315.5
135°	2434.5	2470.3	2477.3	2473.8	2464.6
137.5°	2577.8	2606.7	2612.4	2610.1	2596.3
140°	2703.7	2732.6	2748.8	2748.8	2736.0
142.5°	2833.2	2862.1	2871.2	2874.7	2862.1
145°	2955.6	2978.7	2997.2	3000.7	2988.0
147.5°	3065.3	3094.2	3108.2	3113.9	3101.2
150°	3178.7	3198.2	3211.0	3221.4	3211.0
152.5°	3279.1	3298.7	3315.0	3327.7	3315.0
155°	3379.6	3388.9	3399.3	3415.5	3405.1
157.5°	3466.4	3473.2	3479.0	3502.1	3486.0
160°	3543.7	3550.7	3554.1	3573.8	3559.9
162.5°	3615.3	3615.3	3618.9	3640.8	3624.6
165°	3676.6	3673.2	3673.2	3696.2	3680.1
167.5°	3732.1	3721.7	3721.7	3744.8	3728.6
170°	3773.7	3764.4	3760.9	3784.1	3764.4
172.5°	3802.5	3793.3	3789.8	3812.9	3793.3
175°	3825.7	3816.4	3809.5	3832.5	3812.9
177.5°	3838.4	3829.1	3822.1	3841.8	3822.1
180°	3832.5	3832.5	3832.5	3832.5	3832.5

TEST NUMBER: P908267

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.55	11.33	11.55	12.35	13.70	6.52	7.31	7.53	8.32	9.67
	3H	12.22	12.92	13.24	13.95	15.32	7.71	8.41	8.73	9.43	10.80
	4H	12.83	13.49	13.86	14.52	15.90	8.16	8.82	9.19	9.85	11.23
	6H	13.25	13.86	14.29	14.89	16.28	8.48	9.09	9.52	10.12	11.51
	8H	13.37	13.96	14.42	15.00	16.39	8.57	9.15	9.61	10.20	11.58
	12H	13.43	13.99	14.49	15.03	16.44	8.61	9.16	9.66	10.20	11.61
4H	2H	10.56	11.23	11.60	12.25	13.63	7.11	7.78	8.15	8.80	10.18
	3H	12.39	12.94	13.43	13.99	15.39	8.46	9.01	9.50	10.07	11.46
	4H	13.08	13.58	14.13	14.63	16.04	9.01	9.51	10.06	10.56	11.97
	6H	13.59	14.03	14.65	15.10	16.50	9.42	9.86	10.49	10.93	12.34
	8H	13.77	14.17	14.83	15.23	16.66	9.55	9.96	10.62	11.02	12.45
	12H	13.86	14.23	14.94	15.30	16.73	9.62	9.98	10.70	11.06	12.49
8H	4H	13.04	13.45	14.10	14.51	15.93	9.28	9.69	10.35	10.75	12.17
	6H	13.61	13.94	14.69	15.05	16.47	9.80	10.14	10.89	11.24	12.66
	8H	13.82	14.12	14.92	15.21	16.65	9.99	10.29	11.09	11.38	12.82
	12H	13.96	14.22	15.06	15.30	16.78	10.11	10.37	11.21	11.45	12.94
12H	4H	12.99	13.36	14.07	14.43	15.86	9.29	9.65	10.37	10.73	12.16
	6H	13.58	13.88	14.68	14.96	16.41	9.85	10.15	10.94	11.23	12.67
	8H	13.80	14.06	14.90	15.14	16.62	10.06	10.32	11.16	11.40	12.88

END OF REPORT