

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908286

Luminaire Tested: DFN2DIP-HX4F0-120D040US840-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908286
REPORT IS A COMBINATION OF REPORTS P899315 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-120D040US840-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15572.1 lumens
Efficiency: N/A
Efficacy: 103.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 149.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908286

CATALOG NUMBER: DFN2DIP-HX4F0-120D040US840-FLLFLL

Luminous Intensity Polar Plot

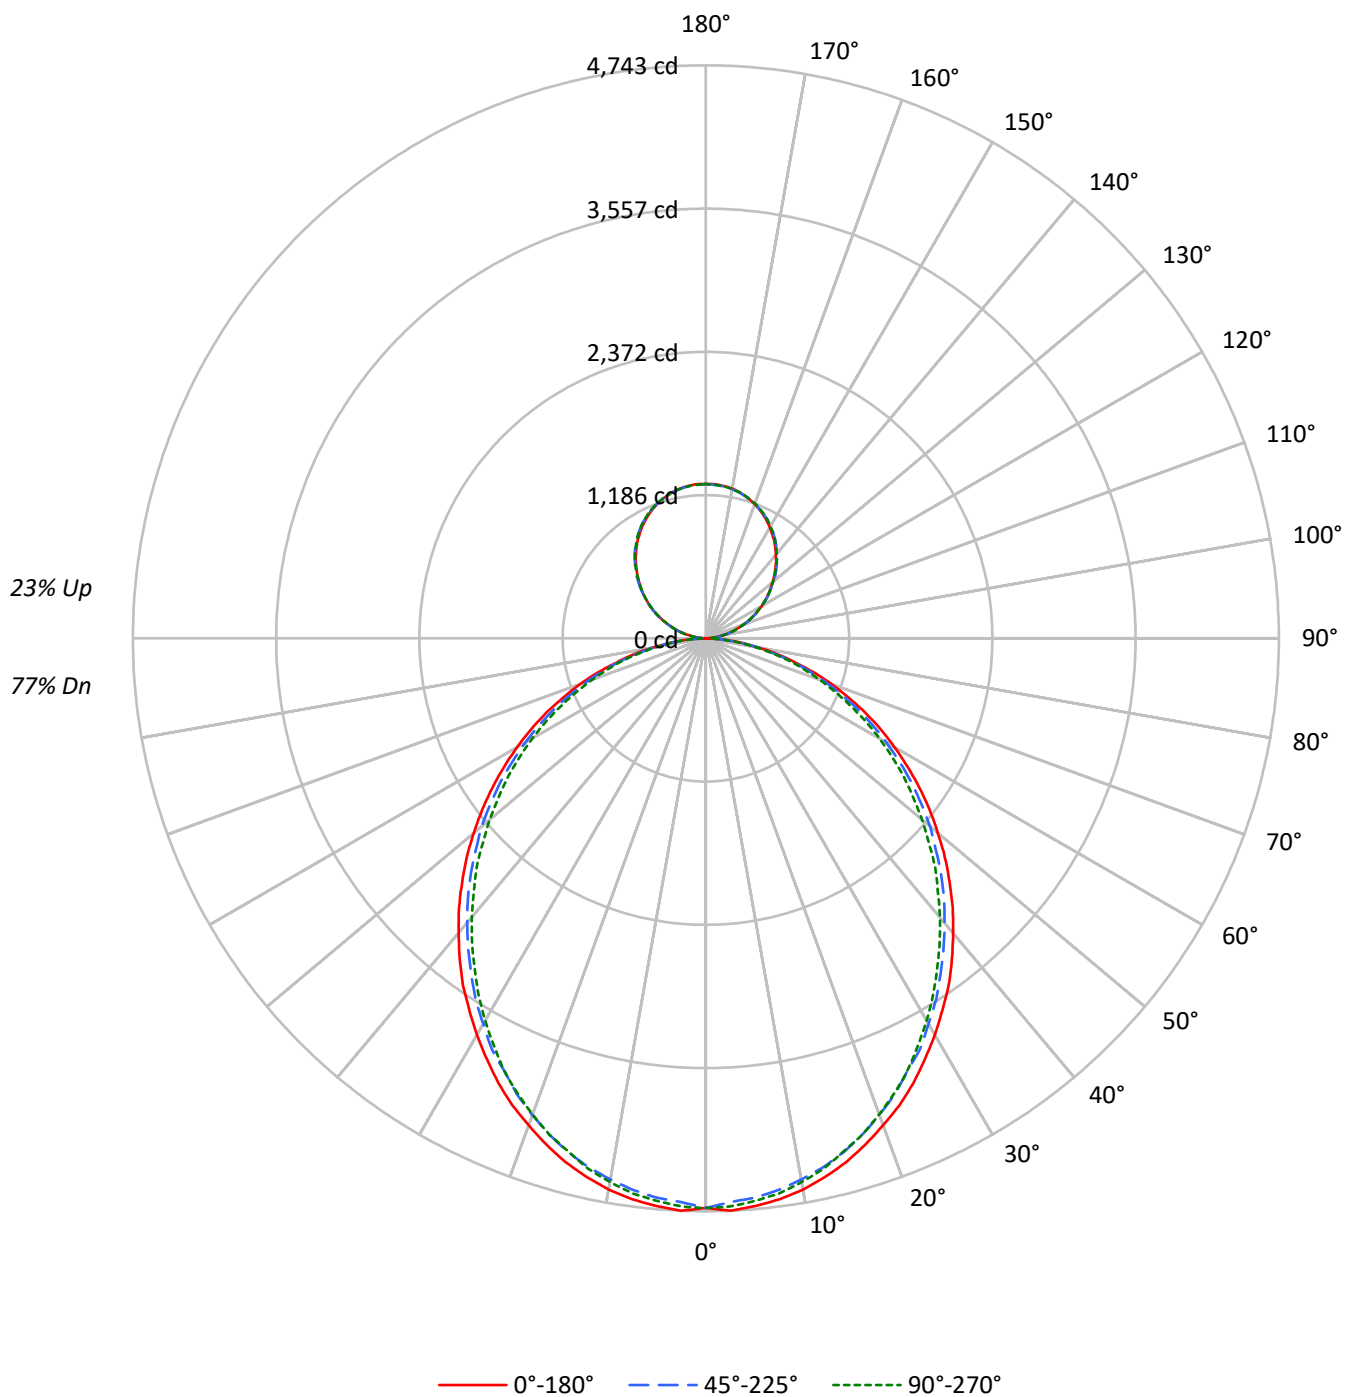

TEST NUMBER: P908286

CATALOG NUMBER: DFN2DIP-HX4F0-120D040US840-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	114	114	114	114	108	108	108	108	98	98	98	89	89	89	81	81	81
1	104	99	95	92	99	95	91	88	86	84	81	79	77	75	72	70	68
2	95	87	80	75	90	83	77	72	76	71	67	69	66	62	63	60	58
3	86	76	69	63	82	73	66	61	67	61	57	61	57	53	56	52	49
4	79	68	59	53	75	65	57	52	60	53	48	55	50	45	50	46	42
5	73	61	52	46	69	58	50	44	53	47	42	49	44	39	45	41	37
6	67	55	46	40	64	52	45	39	48	42	37	45	39	35	41	36	33
7	62	49	41	35	59	48	40	34	44	37	33	41	35	31	37	33	29
8	58	45	37	31	55	43	36	31	40	34	29	37	32	28	34	30	26
9	54	41	33	28	52	40	32	27	37	31	26	34	29	25	32	27	24
10	51	38	30	25	48	37	30	25	34	28	24	32	26	23	30	25	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3506	3506	3506
5°	3512	3458	3481
10°	3484	3411	3434
15°	3433	3356	3360
20°	3364	3278	3285
25°	3295	3185	3198
30°	3209	3098	3087
35°	3128	2996	2970
40°	3028	2893	2859
45°	2928	2790	2745
50°	2818	2682	2613
55°	2704	2556	2492
60°	2574	2407	2353
65°	2434	2253	2189
70°	2254	2065	2013
75°	2005	1840	1850
80°	1706	1554	1539
85°	1238	1059	1024

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2928 cd/sqm

TEST NUMBER: P908286

CATALOG NUMBER: DFN2DIP-HX4F0-120D040US840-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	443.8	2.9
10°-20°	1248.7	8.0
20°-30°	1835.1	11.8
30°-40°	2131.4	13.7
40°-50°	2128.7	13.7
50°-60°	1856.2	11.9
60°-70°	1372.1	8.8
70°-80°	776.3	5.0
80°-90°	208.5	1.3
90°-100°	79.1	0.5
100°-110°	251.2	1.6
110°-120°	429.8	2.8
120°-130°	565.3	3.6
130°-140°	634.5	4.1
140°-150°	622.2	4.0
150°-160°	522.0	3.4
160°-170°	346.2	2.2
170°-180°	121.0	0.8
0°-30°	3527.6	22.7
0°-40°	5659.0	36.3
0°-60°	9643.8	61.9
0°-90°	12000.8	77.1
90°-120°	760.1	4.9
90°-150°	2582.2	16.6
90°-180°	3571.0	22.9
0°-180°	15572.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4715	4715	4715	4715	4715	
5°	4715	4698	4648	4684	4675	448
15°	4489	4462	4403	4421	4398	1264
25°	4062	4026	3950	3958	3950	1869
35°	3505	3460	3387	3360	3337	2189
45°	2852	2820	2752	2703	2684	2201
55°	2158	2131	2077	2022	2000	1930
65°	1456	1428	1383	1342	1320	1439
75°	762	753	730	703	712	813
85°	186	181	177	163	159	207
90°	1	14	38	35	37	15
95°	56	67	69	69	67	63
105°	232	235	237	239	239	245
115°	431	438	436	434	431	427
125°	627	637	634	630	629	561
135°	812	823	826	825	822	627
145°	985	993	999	1000	996	616
155°	1126	1130	1133	1138	1135	519
165°	1226	1224	1224	1232	1227	346
175°	1275	1272	1270	1278	1271	121
180°	1278	1278	1278	1278	1278	

TEST NUMBER: P908286

CATALOG NUMBER: DFN2DIP-HX4F0-120D040US840-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4715.4	4715.4	4715.4	4715.4	4715.4
2.5°	4742.7	4720.1	4670.1	4715.4	4706.7
5°	4715.4	4697.5	4647.5	4683.6	4674.9
7.5°	4683.6	4656.6	4606.6	4643.2	4634.1
10°	4634.1	4602.3	4547.9	4584.0	4570.6
12.5°	4565.7	4538.7	4484.4	4507.0	4497.8
15°	4488.8	4461.8	4402.6	4420.9	4398.3
17.5°	4393.5	4366.6	4307.4	4330.0	4307.4
20°	4289.1	4262.1	4198.7	4212.1	4194.4
22.5°	4185.2	4144.3	4085.1	4085.1	4076.0
25°	4062.5	4026.4	3949.5	3958.2	3949.5
27.5°	3926.4	3894.6	3836.0	3822.4	3799.9
30°	3790.7	3754.2	3686.3	3672.9	3654.6
32.5°	3645.4	3618.6	3545.8	3518.5	3500.2
35°	3504.9	3459.8	3387.1	3359.7	3337.1
37.5°	3346.2	3305.4	3232.7	3201.0	3178.3
40°	3183.2	3146.6	3073.9	3033.5	3015.3
42.5°	3024.4	2987.9	2915.7	2870.0	2843.1
45°	2852.2	2820.5	2752.1	2702.6	2684.3
47.5°	2684.3	2652.5	2579.9	2529.9	2503.0
50°	2507.3	2484.7	2421.2	2357.6	2335.0
52.5°	2335.0	2303.3	2244.6	2194.5	2162.8
55°	2158.5	2131.1	2076.7	2022.4	1999.7
57.5°	1981.5	1958.8	1899.7	1845.3	1827.0
60°	1804.4	1786.7	1723.1	1673.1	1659.6
62.5°	1632.2	1600.4	1555.3	1510.1	1491.8
65°	1455.7	1428.3	1383.0	1342.1	1319.6
67.5°	1274.3	1251.2	1210.8	1179.1	1160.8
70°	1106.4	1088.1	1047.2	1015.5	997.7
72.5°	934.2	915.9	893.3	861.6	848.1
75°	761.5	752.9	729.7	702.9	712.0
77.5°	607.5	589.3	580.2	566.6	553.2
80°	453.6	448.8	439.7	426.3	417.1
82.5°	308.3	308.3	304.1	285.8	285.8
85°	185.7	181.4	177.0	163.1	158.8
87.5°	81.8	72.6	63.5	50.0	45.2
90°	1.1	13.8	37.8	35.4	36.6
92.5°	23.8	32.3	33.5	34.6	34.6
95°	56.2	67.1	69.0	69.0	67.1
97.5°	93.6	103.6	107.9	107.9	107.9
100°	136.7	145.6	148.7	148.7	147.5
102.5°	182.2	188.7	193.0	194.1	193.0
105°	231.9	234.9	237.2	239.1	239.1
107.5°	281.1	285.8	285.8	286.5	281.1
110°	328.9	335.1	335.1	335.1	332.0

TEST NUMBER: P908286

CATALOG NUMBER: DFN2DIP-HX4F0-120D040US840-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	380.5	387.1	385.9	382.8	380.5
115°	431.3	437.6	435.6	434.4	431.3
117.5°	481.8	490.3	484.9	481.8	478.8
120°	532.7	541.1	532.7	532.7	529.2
122.5°	578.9	589.7	584.3	581.2	578.9
125°	627.4	637.0	634.0	630.5	629.3
127.5°	674.8	686.7	682.5	677.8	674.8
130°	719.0	733.0	731.0	728.7	724.5
132.5°	768.7	779.5	780.3	774.9	771.8
135°	811.5	823.4	825.8	824.6	821.5
137.5°	859.3	868.9	870.8	870.0	865.5
140°	901.2	910.9	916.3	916.3	912.0
142.5°	944.4	954.0	957.0	958.3	954.0
145°	985.2	992.9	999.1	1000.3	996.0
147.5°	1021.8	1031.4	1036.0	1037.9	1033.7
150°	1059.6	1066.1	1070.4	1073.8	1070.4
152.5°	1093.1	1099.5	1105.0	1109.2	1105.0
155°	1126.5	1129.6	1133.1	1138.5	1135.0
157.5°	1155.5	1157.7	1159.6	1167.4	1162.0
160°	1181.2	1183.6	1184.7	1191.2	1186.6
162.5°	1205.1	1205.1	1206.3	1213.6	1208.2
165°	1225.6	1224.4	1224.4	1232.0	1226.7
167.5°	1244.1	1240.5	1240.5	1248.3	1242.8
170°	1257.9	1254.8	1253.6	1261.3	1254.8
172.5°	1267.5	1264.5	1263.2	1271.0	1264.5
175°	1275.3	1272.1	1269.8	1277.5	1271.0
177.5°	1279.5	1276.4	1274.0	1280.6	1274.0
180°	1277.5	1277.5	1277.5	1277.5	1277.5

TEST NUMBER: P908286

CATALOG NUMBER: DFN2DIP-HX4F0-120D040US840-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.83	15.00	14.51	15.70	16.53	13.40	14.57	14.08	15.27	16.09
	3H	15.51	16.57	16.21	17.28	18.14	15.04	16.09	15.74	16.81	17.66
	4H	16.12	17.11	16.83	17.83	18.70	15.64	16.64	16.36	17.36	18.23
	6H	16.53	17.45	17.26	18.18	19.07	16.06	16.97	16.79	17.71	18.59
	8H	16.65	17.52	17.39	18.27	19.16	16.17	17.05	16.91	17.80	18.68
	12H	16.70	17.54	17.45	18.29	19.20	16.22	17.06	16.97	17.80	18.72
4H	2H	14.33	15.32	15.05	16.04	16.91	13.98	14.98	14.70	15.70	16.57
	3H	16.22	17.05	16.95	17.81	18.70	15.83	16.66	16.56	17.42	18.31
	4H	16.95	17.70	17.70	18.47	19.38	16.54	17.30	17.29	18.06	18.98
	6H	17.48	18.14	18.25	18.92	19.85	17.07	17.73	17.84	18.51	19.44
	8H	17.64	18.25	18.41	19.03	19.97	17.23	17.84	18.00	18.62	19.56
	12H	17.73	18.28	18.52	19.08	20.03	17.31	17.86	18.10	18.66	19.60
8H	4H	17.17	17.78	17.94	18.57	19.50	16.81	17.42	17.58	18.21	19.14
	6H	17.82	18.32	18.62	19.15	20.09	17.45	17.96	18.26	18.79	19.72
	8H	18.04	18.49	18.85	19.32	20.27	17.67	18.12	18.49	18.95	19.90
	12H	18.19	18.59	19.00	19.40	20.41	17.80	18.20	18.62	19.02	20.03
12H	4H	17.17	17.72	17.96	18.53	19.47	16.82	17.37	17.61	18.18	19.12
	6H	17.85	18.30	18.66	19.13	20.08	17.50	17.95	18.31	18.77	19.73
	8H	18.11	18.51	18.92	19.32	20.33	17.75	18.15	18.57	18.96	19.97