

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908298

Luminaire Tested: DFN2DIP-HX4F0-120D100US840-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P908298  
REPORT IS A COMBINATION OF REPORTS P899423 AND P896188  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-HX4F0-120D100US840-FLLFLL  
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 20934.5 lumens  
Efficiency: N/A  
Efficacy: 113.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 183.9  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9954  
Total Harmonic Distortion (THDi): 0.076  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P908298  
CATALOG NUMBER: DFN2DIP-HX4F0-120D100US840-FLLFLL

### Luminous Intensity Polar Plot

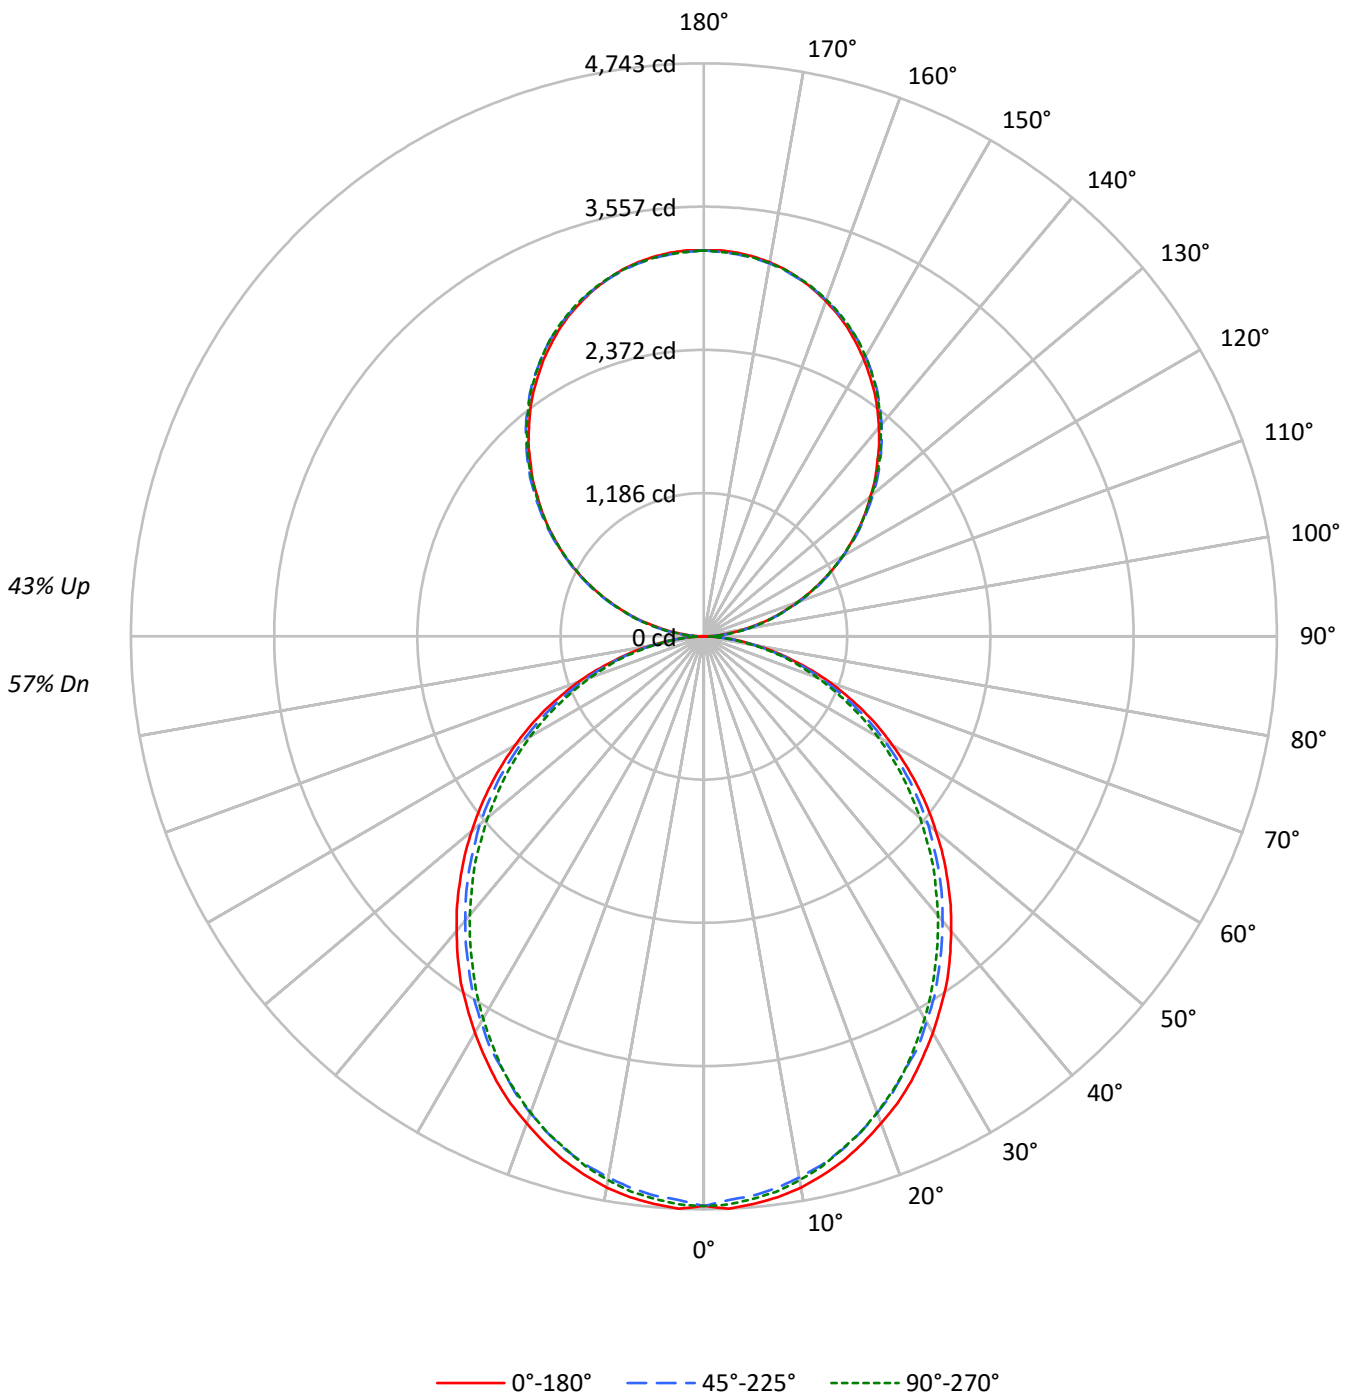



TEST NUMBER: P908298

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US840-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	101	101	101	101	87	87	87	75	75	75	63	63	63	57	57	57	57
1	99	95	91	88	92	89	85	82	77	74	72	66	64	62	56	54	53	48	48	48	48
2	91	83	77	72	84	78	72	67	67	63	60	58	55	52	49	47	45	40	40	40	40
3	83	73	66	60	77	68	62	56	59	54	50	51	47	44	43	41	38	34	34	34	34
4	76	65	57	51	70	61	53	48	53	47	43	46	41	38	39	36	33	29	29	29	29
5	69	58	49	43	64	54	47	41	47	41	37	41	36	33	35	31	29	26	26	26	26
6	64	52	44	38	59	49	41	36	43	37	32	37	32	29	32	28	25	22	22	22	22
7	59	47	39	33	55	44	37	32	39	33	28	34	29	25	29	25	22	20	20	20	20
8	55	43	35	29	51	40	33	28	35	29	25	31	26	23	27	23	20	18	18	18	18
9	51	39	31	26	48	37	30	25	32	27	23	28	24	20	25	21	18	16	16	16	16
10	48	36	28	24	45	34	27	23	30	24	21	26	22	19	23	19	17	15	15	15	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3506	3506	3506
5°	3512	3458	3481
10°	3484	3411	3434
15°	3433	3356	3360
20°	3364	3278	3285
25°	3295	3185	3198
30°	3209	3098	3087
35°	3128	2996	2970
40°	3028	2893	2859
45°	2928	2790	2745
50°	2818	2682	2613
55°	2704	2556	2492
60°	2574	2407	2353
65°	2434	2253	2189
70°	2254	2065	2013
75°	2005	1840	1850
80°	1706	1554	1539
85°	1238	1059	1024

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2928 cd/sqm



TEST NUMBER: P908298

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US840-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	443.8	2.1
10°-20°	1248.7	6.0
20°-30°	1835.1	8.8
30°-40°	2131.4	10.2
40°-50°	2128.7	10.2
50°-60°	1856.2	8.9
60°-70°	1372.1	6.6
70°-80°	776.3	3.7
80°-90°	214.0	1.0
90°-100°	197.6	0.9
100°-110°	627.9	3.0
110°-120°	1074.6	5.1
120°-130°	1413.3	6.8
130°-140°	1586.4	7.6
140°-150°	1555.6	7.4
150°-160°	1304.9	6.2
160°-170°	865.4	4.1
170°-180°	302.5	1.4
0°-30°	3527.6	16.9
0°-40°	5659.0	27.0
0°-60°	9643.8	46.1
0°-90°	12006.2	57.4
90°-120°	1900.2	9.1
90°-150°	6455.4	30.8
90°-180°	8928.0	42.6
0°-180°	20934.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	4715	4715	4715	4715	4715	
5°	4715	4698	4648	4684	4675	448
15°	4489	4462	4403	4421	4398	1264
25°	4062	4026	3950	3958	3950	1869
35°	3505	3460	3387	3360	3337	2189
45°	2852	2820	2752	2703	2684	2201
55°	2158	2131	2077	2022	2000	1930
65°	1456	1428	1383	1342	1320	1439
75°	762	753	730	703	712	813
85°	186	181	177	163	159	207
90°	3	35	94	89	92	20
95°	141	168	172	172	168	156
105°	580	587	593	598	598	612
115°	1078	1094	1089	1086	1078	1067
125°	1568	1593	1585	1576	1573	1402
135°	2029	2059	2064	2062	2054	1568
145°	2463	2482	2498	2500	2490	1539
155°	2816	2824	2833	2846	2838	1296
165°	3064	3061	3061	3080	3067	864
175°	3188	3180	3175	3194	3177	303
180°	3194	3194	3194	3194	3194	



TEST NUMBER: P908298

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US840-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	4715.4	4715.4	4715.4	4715.4	4715.4
2.5°	4742.7	4720.1	4670.1	4715.4	4706.7
5°	4715.4	4697.5	4647.5	4683.6	4674.9
7.5°	4683.6	4656.6	4606.6	4643.2	4634.1
10°	4634.1	4602.3	4547.9	4584.0	4570.6
12.5°	4565.7	4538.7	4484.4	4507.0	4497.8
15°	4488.8	4461.8	4402.6	4420.9	4398.3
17.5°	4393.5	4366.6	4307.4	4330.0	4307.4
20°	4289.1	4262.1	4198.7	4212.1	4194.4
22.5°	4185.2	4144.3	4085.1	4085.1	4076.0
25°	4062.5	4026.4	3949.5	3958.2	3949.5
27.5°	3926.4	3894.6	3836.0	3822.4	3799.9
30°	3790.7	3754.2	3686.3	3672.9	3654.6
32.5°	3645.4	3618.6	3545.8	3518.5	3500.2
35°	3504.9	3459.8	3387.1	3359.7	3337.1
37.5°	3346.2	3305.4	3232.7	3201.0	3178.3
40°	3183.2	3146.6	3073.9	3033.5	3015.3
42.5°	3024.4	2987.9	2915.7	2870.0	2843.1
45°	2852.2	2820.5	2752.1	2702.6	2684.3
47.5°	2684.3	2652.5	2579.9	2529.9	2503.0
50°	2507.3	2484.7	2421.2	2357.6	2335.0
52.5°	2335.0	2303.3	2244.6	2194.5	2162.8
55°	2158.5	2131.1	2076.7	2022.4	1999.7
57.5°	1981.5	1958.8	1899.7	1845.3	1827.0
60°	1804.4	1786.7	1723.1	1673.1	1659.6
62.5°	1632.2	1600.4	1555.3	1510.1	1491.8
65°	1455.7	1428.3	1383.0	1342.1	1319.6
67.5°	1274.3	1251.2	1210.8	1179.1	1160.8
70°	1106.4	1088.1	1047.2	1015.5	997.7
72.5°	934.2	915.9	893.3	861.6	848.1
75°	761.5	752.9	729.7	702.9	712.0
77.5°	607.5	589.3	580.2	566.6	553.2
80°	453.6	448.8	439.7	426.3	417.1
82.5°	308.3	308.3	304.1	285.8	285.8
85°	185.7	181.4	177.0	163.1	158.8
87.5°	81.8	72.6	63.5	50.0	45.2
90°	2.9	34.6	94.3	88.6	91.5
92.5°	59.7	80.9	83.8	86.6	86.6
95°	140.6	167.5	172.4	172.4	167.5
97.5°	234.0	259.0	269.6	269.6	269.6
100°	341.8	364.0	371.6	371.6	368.8
102.5°	455.4	471.8	482.4	485.2	482.4
105°	579.7	587.3	593.1	597.9	597.9
107.5°	702.9	714.5	714.5	716.4	702.9
110°	822.3	837.7	837.7	837.7	830.0



TEST NUMBER: P908298

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US840-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	951.3	967.7	964.8	957.0	951.3
115°	1078.4	1093.8	1089.0	1086.1	1078.4
117.5°	1204.6	1225.8	1212.2	1204.6	1196.8
120°	1331.6	1352.8	1331.6	1331.6	1323.0
122.5°	1447.1	1474.1	1460.7	1453.0	1447.1
125°	1568.5	1592.6	1584.9	1576.2	1573.4
127.5°	1687.0	1716.8	1706.2	1694.7	1687.0
130°	1797.7	1832.3	1827.6	1821.7	1811.2
132.5°	1921.9	1948.8	1950.8	1937.3	1929.6
135°	2028.7	2058.6	2064.4	2061.5	2053.8
137.5°	2148.2	2172.2	2177.1	2175.1	2163.5
140°	2253.1	2277.1	2290.7	2290.7	2280.1
142.5°	2361.0	2385.0	2392.7	2395.6	2385.0
145°	2463.0	2482.2	2497.7	2500.5	2489.9
147.5°	2554.5	2578.6	2590.1	2595.0	2584.3
150°	2648.9	2665.2	2675.8	2684.4	2675.8
152.5°	2732.6	2749.0	2762.5	2773.1	2762.5
155°	2816.4	2824.1	2832.8	2846.2	2837.5
157.5°	2888.6	2894.4	2899.2	2918.4	2905.0
160°	2953.1	2958.9	2961.7	2978.1	2966.6
162.5°	3012.8	3012.8	3015.7	3033.9	3020.5
165°	3063.8	3060.9	3060.9	3080.2	3066.8
167.5°	3110.1	3101.4	3101.4	3120.7	3107.2
170°	3144.7	3137.0	3134.1	3153.4	3137.0
172.5°	3168.8	3161.1	3158.2	3177.4	3161.1
175°	3188.0	3180.4	3174.6	3193.8	3177.4
177.5°	3198.6	3191.0	3185.1	3201.5	3185.1
180°	3193.8	3193.8	3193.8	3193.8	3193.8



TEST NUMBER: P908298  
 CATALOG NUMBER: DFN2DIP-HX4F0-120D100US840-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.28	13.21	13.17	14.13	15.29	11.85	12.78	12.74	13.69	14.86
	3H	13.95	14.79	14.85	15.71	16.89	13.48	14.31	14.38	15.23	16.42
	4H	14.54	15.33	15.46	16.26	17.45	14.07	14.86	14.99	15.78	16.98
	6H	14.94	15.67	15.87	16.61	17.82	14.47	15.20	15.40	16.13	17.34
	8H	15.05	15.75	15.99	16.70	17.90	14.58	15.27	15.51	16.22	17.43
	12H	15.10	15.76	16.05	16.71	17.94	14.62	15.28	15.57	16.23	17.46
4H	2H	12.75	13.54	13.68	14.47	15.67	12.41	13.20	13.33	14.13	15.32
	3H	14.63	15.29	15.56	16.24	17.46	14.23	14.89	15.17	15.85	17.06
	4H	15.34	15.95	16.29	16.90	18.14	14.94	15.54	15.88	16.49	17.73
	6H	15.86	16.38	16.82	17.36	18.60	15.46	15.98	16.41	16.95	18.19
	8H	16.02	16.50	16.98	17.47	18.72	15.60	16.09	16.56	17.06	18.31
	12H	16.09	16.53	17.07	17.52	18.77	15.67	16.11	16.65	17.10	18.35
8H	4H	15.55	16.03	16.51	17.00	18.25	15.19	15.67	16.15	16.64	17.89
	6H	16.18	16.59	17.17	17.60	18.84	15.82	16.22	16.81	17.23	18.48
	8H	16.41	16.76	17.40	17.76	19.03	16.04	16.39	17.03	17.39	18.66
	12H	16.54	16.85	17.54	17.85	19.16	16.16	16.47	17.15	17.46	18.78
12H	4H	15.54	15.98	16.52	16.96	18.22	15.18	15.62	16.16	16.61	17.86
	6H	16.21	16.57	17.21	17.57	18.84	15.86	16.22	16.86	17.22	18.48
	8H	16.46	16.77	17.46	17.77	19.08	16.10	16.42	17.10	17.41	18.72