

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910874

Luminaire Tested: DFN2DIP-HX4F0-040D060US850-FLLFLL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P910874  
REPORT IS A COMBINATION OF REPORTS P899335 AND P896188  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-HX4F0-040D060US850-FLLFLL  
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 10280.4 lumens  
Efficiency: N/A  
Efficacy: 152.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')  
CIE Type: General Diffuse

Input Watts (W): 67.3  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9977  
Total Harmonic Distortion (THDi): 0.049  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P910874

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US850-FLLFLL

### Luminous Intensity Polar Plot

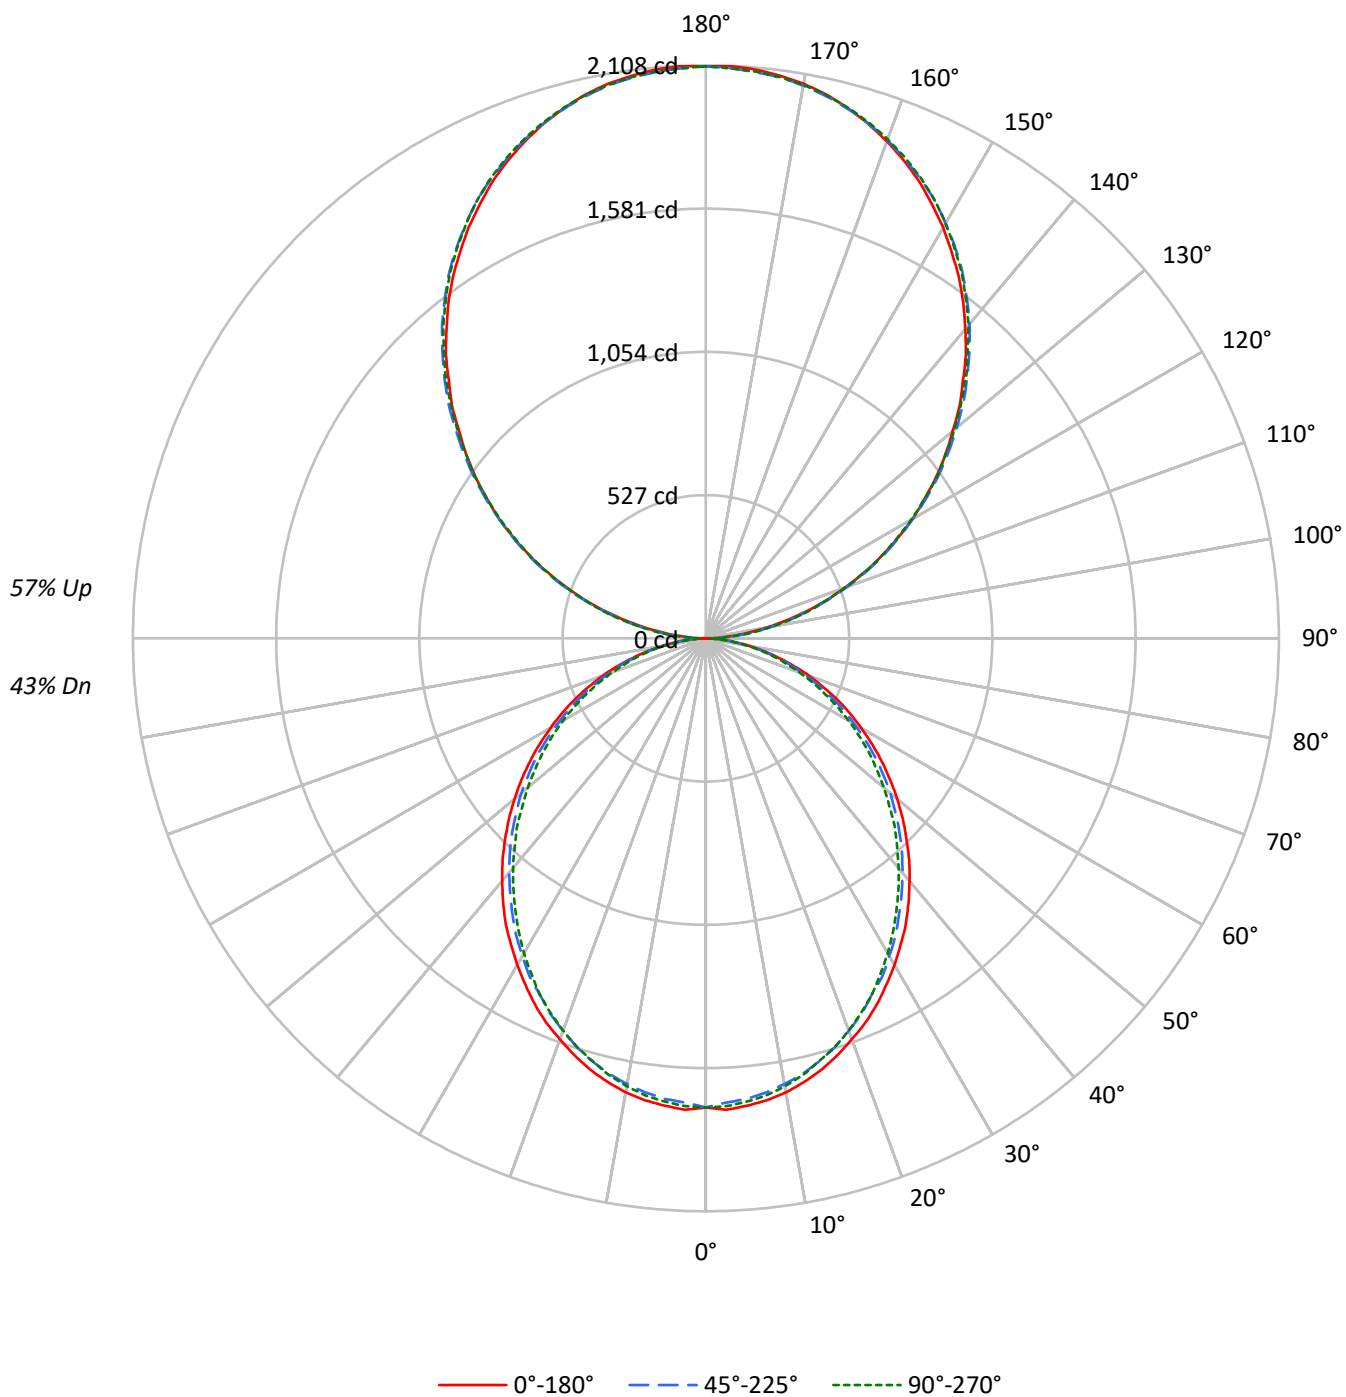

TEST NUMBER: P910874

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US850-FLLFL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| RF  | 20  |     |     |     | 20 |    |    |    | 20 |    |    |    | 20 |    |    |    | 20 |
| RC  | 80  |     |     |     | 70 |    |    |    | 50 |    |    |    | 30 |    |    |    | 10 |
| RW  | 70  | 50  | 30  | 10  | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| RCR |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 0   | 105 | 105 | 105 | 105 | 96 | 96 | 96 | 96 | 79 | 79 | 79 | 64 | 64 | 64 | 49 | 49 | 49 |
| 1   | 96  | 92  | 88  | 85  | 88 | 84 | 81 | 78 | 69 | 67 | 65 | 56 | 54 | 53 | 44 | 43 | 42 |
| 2   | 88  | 80  | 74  | 69  | 80 | 73 | 68 | 64 | 61 | 57 | 54 | 49 | 47 | 44 | 38 | 37 | 35 |
| 3   | 80  | 70  | 63  | 57  | 73 | 65 | 58 | 53 | 54 | 49 | 45 | 44 | 40 | 37 | 34 | 32 | 30 |
| 4   | 73  | 62  | 55  | 49  | 66 | 57 | 50 | 45 | 48 | 43 | 39 | 39 | 35 | 32 | 30 | 28 | 26 |
| 5   | 67  | 56  | 47  | 42  | 61 | 51 | 44 | 39 | 43 | 37 | 33 | 35 | 31 | 28 | 27 | 25 | 22 |
| 6   | 62  | 50  | 42  | 36  | 56 | 46 | 39 | 34 | 38 | 33 | 29 | 31 | 27 | 24 | 25 | 22 | 20 |
| 7   | 57  | 45  | 37  | 31  | 52 | 41 | 34 | 29 | 35 | 29 | 25 | 29 | 24 | 21 | 23 | 20 | 18 |
| 8   | 53  | 41  | 33  | 28  | 48 | 38 | 31 | 26 | 32 | 26 | 23 | 26 | 22 | 19 | 21 | 18 | 16 |
| 9   | 49  | 37  | 30  | 25  | 45 | 34 | 28 | 23 | 29 | 24 | 20 | 24 | 20 | 17 | 19 | 16 | 14 |
| 10  | 46  | 34  | 27  | 22  | 42 | 31 | 25 | 21 | 27 | 22 | 18 | 22 | 18 | 15 | 18 | 15 | 13 |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°   | 45°  | 90°  |
|-----|------|------|------|
| 0°  | 1283 | 1283 | 1283 |
| 5°  | 1286 | 1266 | 1274 |
| 10° | 1275 | 1249 | 1257 |
| 15° | 1257 | 1228 | 1230 |
| 20° | 1231 | 1200 | 1203 |
| 25° | 1206 | 1166 | 1171 |
| 30° | 1175 | 1134 | 1130 |
| 35° | 1145 | 1097 | 1087 |
| 40° | 1108 | 1059 | 1047 |
| 45° | 1072 | 1021 | 1005 |
| 50° | 1032 | 982  | 957  |
| 55° | 990  | 936  | 912  |
| 60° | 942  | 881  | 861  |
| 65° | 891  | 825  | 801  |
| 70° | 825  | 756  | 737  |
| 75° | 734  | 674  | 677  |
| 80° | 624  | 569  | 564  |
| 85° | 453  | 388  | 375  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1585 cd/sqm

TEST NUMBER: P910874

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US850-FLLFLL

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 162.5   | 1.6       |
| 10°-20°   | 457.1   | 4.4       |
| 20°-30°   | 671.7   | 6.5       |
| 30°-40°   | 780.2   | 7.6       |
| 40°-50°   | 779.2   | 7.6       |
| 50°-60°   | 679.5   | 6.6       |
| 60°-70°   | 502.3   | 4.9       |
| 70°-80°   | 284.2   | 2.8       |
| 80°-90°   | 81.0    | 0.8       |
| 90°-100°  | 130.2   | 1.3       |
| 100°-110° | 413.7   | 4.0       |
| 110°-120° | 708.0   | 6.9       |
| 120°-130° | 931.2   | 9.1       |
| 130°-140° | 1045.3  | 10.2      |
| 140°-150° | 1025.0  | 10.0      |
| 150°-160° | 859.8   | 8.4       |
| 160°-170° | 570.2   | 5.5       |
| 170°-180° | 199.3   | 1.9       |
| 0°-30°    | 1291.3  | 12.6      |
| 0°-40°    | 2071.5  | 20.1      |
| 0°-60°    | 3530.2  | 34.3      |
| 0°-90°    | 4397.6  | 42.8      |
| 90°-120°  | 1252.0  | 12.2      |
| 90°-150°  | 4253.5  | 41.4      |
| 90°-180°  | 5883.0  | 57.2      |
| 0°-180°   | 10280.4 | 100.0     |

**CANDELA DISTRIBUTION:**

|      | 0°   | 22.5° | 45°  | 67.5° | 90°  | Flux |
|------|------|-------|------|-------|------|------|
| 0°   | 1726 | 1726  | 1726 | 1726  | 1726 |      |
| 5°   | 1726 | 1720  | 1701 | 1714  | 1711 | 164  |
| 15°  | 1643 | 1633  | 1612 | 1618  | 1610 | 463  |
| 25°  | 1487 | 1474  | 1446 | 1449  | 1446 | 684  |
| 35°  | 1283 | 1266  | 1240 | 1230  | 1222 | 801  |
| 45°  | 1044 | 1032  | 1007 | 989   | 983  | 806  |
| 55°  | 790  | 780   | 760  | 740   | 732  | 706  |
| 65°  | 533  | 523   | 506  | 491   | 483  | 527  |
| 75°  | 279  | 276   | 267  | 257   | 261  | 298  |
| 85°  | 68   | 66    | 65   | 60    | 58   | 76   |
| 90°  | 2    | 23    | 62   | 58    | 60   | 10   |
| 95°  | 93   | 110   | 114  | 114   | 110  | 103  |
| 105° | 382  | 387   | 391  | 394   | 394  | 403  |
| 115° | 710  | 721   | 718  | 716   | 710  | 703  |
| 125° | 1034 | 1049  | 1044 | 1039  | 1037 | 924  |
| 135° | 1337 | 1356  | 1360 | 1358  | 1353 | 1033 |
| 145° | 1623 | 1636  | 1646 | 1648  | 1641 | 1014 |
| 155° | 1856 | 1861  | 1866 | 1875  | 1870 | 854  |
| 165° | 2019 | 2017  | 2017 | 2030  | 2021 | 569  |
| 175° | 2101 | 2096  | 2092 | 2104  | 2094 | 200  |
| 180° | 2104 | 2104  | 2104 | 2104  | 2104 |      |

TEST NUMBER: P910874

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US850-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

|        | 0°     | 22.5°  | 45°    | 67.5°  | 90°    |
|--------|--------|--------|--------|--------|--------|
| 0°     | 1726.0 | 1726.0 | 1726.0 | 1726.0 | 1726.0 |
| 2.5°   | 1736.1 | 1727.8 | 1709.5 | 1726.0 | 1722.9 |
| 5°     | 1726.0 | 1719.5 | 1701.2 | 1714.4 | 1711.3 |
| 7.5°   | 1714.4 | 1704.5 | 1686.2 | 1699.7 | 1696.3 |
| 10°    | 1696.3 | 1684.7 | 1664.8 | 1678.0 | 1673.0 |
| 12.5°  | 1671.3 | 1661.4 | 1641.5 | 1649.9 | 1646.4 |
| 15°    | 1643.1 | 1633.2 | 1611.6 | 1618.3 | 1610.0 |
| 17.5°  | 1608.3 | 1598.4 | 1576.8 | 1585.0 | 1576.8 |
| 20°    | 1570.0 | 1560.1 | 1537.0 | 1541.8 | 1535.4 |
| 22.5°  | 1532.0 | 1517.0 | 1495.4 | 1495.4 | 1492.0 |
| 25°    | 1487.1 | 1473.9 | 1445.7 | 1448.9 | 1445.7 |
| 27.5°  | 1437.3 | 1425.6 | 1404.2 | 1399.2 | 1391.0 |
| 30°    | 1387.6 | 1374.3 | 1349.4 | 1344.4 | 1337.8 |
| 32.5°  | 1334.5 | 1324.6 | 1298.0 | 1288.0 | 1281.2 |
| 35°    | 1283.0 | 1266.5 | 1239.9 | 1229.9 | 1221.6 |
| 37.5°  | 1224.9 | 1209.9 | 1183.3 | 1171.8 | 1163.5 |
| 40°    | 1165.2 | 1151.8 | 1125.2 | 1110.4 | 1103.8 |
| 42.5°  | 1107.1 | 1093.7 | 1067.3 | 1050.6 | 1040.7 |
| 45°    | 1044.0 | 1032.5 | 1007.4 | 989.3  | 982.6  |
| 47.5°  | 982.6  | 970.9  | 944.4  | 926.1  | 916.3  |
| 50°    | 917.8  | 909.5  | 886.3  | 863.0  | 854.7  |
| 52.5°  | 854.7  | 843.2  | 821.7  | 803.4  | 791.7  |
| 55°    | 790.2  | 780.1  | 760.2  | 740.3  | 732.1  |
| 57.5°  | 725.3  | 717.1  | 695.3  | 675.5  | 668.8  |
| 60°    | 660.5  | 654.0  | 630.8  | 612.5  | 607.5  |
| 62.5°  | 597.5  | 585.9  | 569.4  | 552.7  | 546.1  |
| 65°    | 532.9  | 522.8  | 506.3  | 491.3  | 483.1  |
| 67.5°  | 466.4  | 458.0  | 443.3  | 431.6  | 425.0  |
| 70°    | 405.0  | 398.4  | 383.4  | 371.7  | 365.2  |
| 72.5°  | 342.0  | 335.3  | 327.0  | 315.4  | 310.4  |
| 75°    | 278.8  | 275.6  | 267.2  | 257.3  | 260.6  |
| 77.5°  | 222.4  | 215.7  | 212.4  | 207.4  | 202.5  |
| 80°    | 166.0  | 164.2  | 160.9  | 156.0  | 152.7  |
| 82.5°  | 112.9  | 112.9  | 111.3  | 104.6  | 104.6  |
| 85°    | 68.0   | 66.4   | 64.8   | 59.7   | 58.1   |
| 87.5°  | 29.9   | 26.6   | 23.3   | 18.3   | 16.5   |
| 90°    | 1.9    | 22.8   | 62.2   | 58.3   | 60.2   |
| 92.5°  | 39.4   | 53.3   | 55.2   | 57.1   | 57.1   |
| 95°    | 92.6   | 110.3  | 113.6  | 113.6  | 110.3  |
| 97.5°  | 154.2  | 170.7  | 177.7  | 177.7  | 177.7  |
| 100°   | 225.2  | 239.8  | 244.9  | 244.9  | 243.0  |
| 102.5° | 300.1  | 310.9  | 317.8  | 319.7  | 317.8  |
| 105°   | 381.9  | 387.0  | 390.8  | 394.0  | 394.0  |
| 107.5° | 463.1  | 470.8  | 470.8  | 472.0  | 463.1  |
| 110°   | 541.9  | 551.9  | 551.9  | 551.9  | 546.8  |

TEST NUMBER: P910874

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US850-FLLFLL

**CANDELA DISTRIBUTION (continued):**

|        | 0°     | 22.5°  | 45°    | 67.5°  | 90°    |
|--------|--------|--------|--------|--------|--------|
| 112.5° | 626.8  | 637.6  | 635.7  | 630.6  | 626.8  |
| 115°   | 710.5  | 720.7  | 717.5  | 715.6  | 710.5  |
| 117.5° | 793.7  | 807.7  | 798.7  | 793.7  | 788.6  |
| 120°   | 877.4  | 891.4  | 877.4  | 877.4  | 871.7  |
| 122.5° | 953.5  | 971.3  | 962.4  | 957.4  | 953.5  |
| 125°   | 1033.5 | 1049.3 | 1044.2 | 1038.6 | 1036.7 |
| 127.5° | 1111.6 | 1131.2 | 1124.2 | 1116.7 | 1111.6 |
| 130°   | 1184.5 | 1207.4 | 1204.2 | 1200.4 | 1193.4 |
| 132.5° | 1266.4 | 1284.1 | 1285.3 | 1276.5 | 1271.4 |
| 135°   | 1336.8 | 1356.4 | 1360.2 | 1358.3 | 1353.2 |
| 137.5° | 1415.4 | 1431.3 | 1434.5 | 1433.2 | 1425.6 |
| 140°   | 1484.6 | 1500.5 | 1509.3 | 1509.3 | 1502.4 |
| 142.5° | 1555.6 | 1571.5 | 1576.6 | 1578.4 | 1571.5 |
| 145°   | 1622.9 | 1635.6 | 1645.8 | 1647.6 | 1640.7 |
| 147.5° | 1683.1 | 1699.0 | 1706.6 | 1709.7 | 1702.8 |
| 150°   | 1745.3 | 1756.1 | 1763.1 | 1768.7 | 1763.1 |
| 152.5° | 1800.5 | 1811.3 | 1820.2 | 1827.2 | 1820.2 |
| 155°   | 1855.7 | 1860.8 | 1866.4 | 1875.4 | 1869.7 |
| 157.5° | 1903.3 | 1907.1 | 1910.3 | 1923.0 | 1914.1 |
| 160°   | 1945.9 | 1949.6 | 1951.5 | 1962.3 | 1954.7 |
| 162.5° | 1985.1 | 1985.1 | 1987.0 | 1999.1 | 1990.2 |
| 165°   | 2018.7 | 2016.8 | 2016.8 | 2029.6 | 2020.7 |
| 167.5° | 2049.2 | 2043.6 | 2043.6 | 2056.2 | 2047.3 |
| 170°   | 2072.1 | 2067.0 | 2065.1 | 2077.7 | 2067.0 |
| 172.5° | 2087.9 | 2082.8 | 2080.9 | 2093.6 | 2082.8 |
| 175°   | 2100.6 | 2095.6 | 2091.7 | 2104.4 | 2093.6 |
| 177.5° | 2107.5 | 2102.6 | 2098.7 | 2109.4 | 2098.7 |
| 180°   | 2104.4 | 2104.4 | 2104.4 | 2104.4 | 2104.4 |



TEST NUMBER: P910874

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US850-FLLFLL

**CIE UGR TABLE:**

| Reflectances:   |      |                  |       |       |       |       |                |       |       |       |       |
|-----------------|------|------------------|-------|-------|-------|-------|----------------|-------|-------|-------|-------|
| Ceiling         |      | 0.7              | 0.7   | 0.5   | 0.5   | 0.3   | 0.7            | 0.7   | 0.5   | 0.5   | 0.3   |
| Wall            |      | 0.5              | 0.3   | 0.5   | 0.3   | 0.3   | 0.5            | 0.3   | 0.5   | 0.3   | 0.3   |
| Reference plane |      | 0.2              | 0.2   | 0.2   | 0.2   | 0.2   | 0.2            | 0.2   | 0.2   | 0.2   | 0.2   |
| Room dimensions |      | Viewed crosswise |       |       |       |       | Viewed endwise |       |       |       |       |
| X=2H            | Y=2H | 7.43             | 8.23  | 8.45  | 9.26  | 10.63 | 7.00           | 7.80  | 8.02  | 8.83  | 10.20 |
|                 | 3H   | 9.09             | 9.80  | 10.11 | 10.84 | 12.23 | 8.61           | 9.33  | 9.64  | 10.37 | 11.76 |
|                 | 4H   | 9.67             | 10.35 | 10.71 | 11.39 | 12.79 | 9.20           | 9.88  | 10.24 | 10.92 | 12.31 |
|                 | 6H   | 10.07            | 10.70 | 11.12 | 11.74 | 13.15 | 9.59           | 10.22 | 10.64 | 11.26 | 12.67 |
|                 | 8H   | 10.17            | 10.77 | 11.23 | 11.83 | 13.23 | 9.70           | 10.29 | 10.75 | 11.35 | 12.76 |
|                 | 12H  | 10.22            | 10.79 | 11.28 | 11.84 | 13.27 | 9.74           | 10.31 | 10.80 | 11.36 | 12.79 |
| 4H              | 2H   | 7.89             | 8.57  | 8.93  | 9.60  | 11.00 | 7.54           | 8.22  | 8.59  | 9.26  | 10.66 |
|                 | 3H   | 9.75             | 10.31 | 10.80 | 11.38 | 12.79 | 9.35           | 9.92  | 10.41 | 10.99 | 12.40 |
|                 | 4H   | 10.46            | 10.98 | 11.52 | 12.04 | 13.47 | 10.05          | 10.57 | 11.11 | 11.63 | 13.06 |
|                 | 6H   | 10.97            | 11.42 | 12.04 | 12.50 | 13.93 | 10.56          | 11.01 | 11.63 | 12.09 | 13.52 |
|                 | 8H   | 11.12            | 11.54 | 12.19 | 12.61 | 14.05 | 10.71          | 11.13 | 11.78 | 12.20 | 13.64 |
|                 | 12H  | 11.19            | 11.57 | 12.28 | 12.66 | 14.10 | 10.77          | 11.15 | 11.86 | 12.23 | 13.68 |
| 8H              | 4H   | 10.65            | 11.07 | 11.72 | 12.14 | 13.59 | 10.29          | 10.71 | 11.36 | 11.78 | 13.22 |
|                 | 6H   | 11.28            | 11.63 | 12.38 | 12.74 | 14.18 | 10.92          | 11.26 | 12.01 | 12.38 | 13.82 |
|                 | 8H   | 11.50            | 11.81 | 12.60 | 12.90 | 14.36 | 11.13          | 11.44 | 12.23 | 12.53 | 13.99 |
|                 | 12H  | 11.63            | 11.90 | 12.74 | 12.99 | 14.49 | 11.25          | 11.51 | 12.35 | 12.61 | 14.11 |
| 12H             | 4H   | 10.64            | 11.01 | 11.72 | 12.10 | 13.55 | 10.28          | 10.66 | 11.37 | 11.75 | 13.20 |
|                 | 6H   | 11.31            | 11.62 | 12.41 | 12.71 | 14.17 | 10.96          | 11.26 | 12.06 | 12.36 | 13.82 |
|                 | 8H   | 11.55            | 11.82 | 12.66 | 12.91 | 14.41 | 11.19          | 11.46 | 12.30 | 12.55 | 14.05 |