

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P927860

Luminaire Tested: DFN2DIP-HX4F0-040D080US850-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P927860
REPORT IS A COMBINATION OF REPORTS P900891 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-040D080US850-FLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 13175.0 lumens
Efficiency: N/A
Efficacy: 143.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 91.6
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P927860
CATALOG NUMBER: DFN2DIP-HX4F0-040D080US850-FLLONL

Luminous Intensity Polar Plot

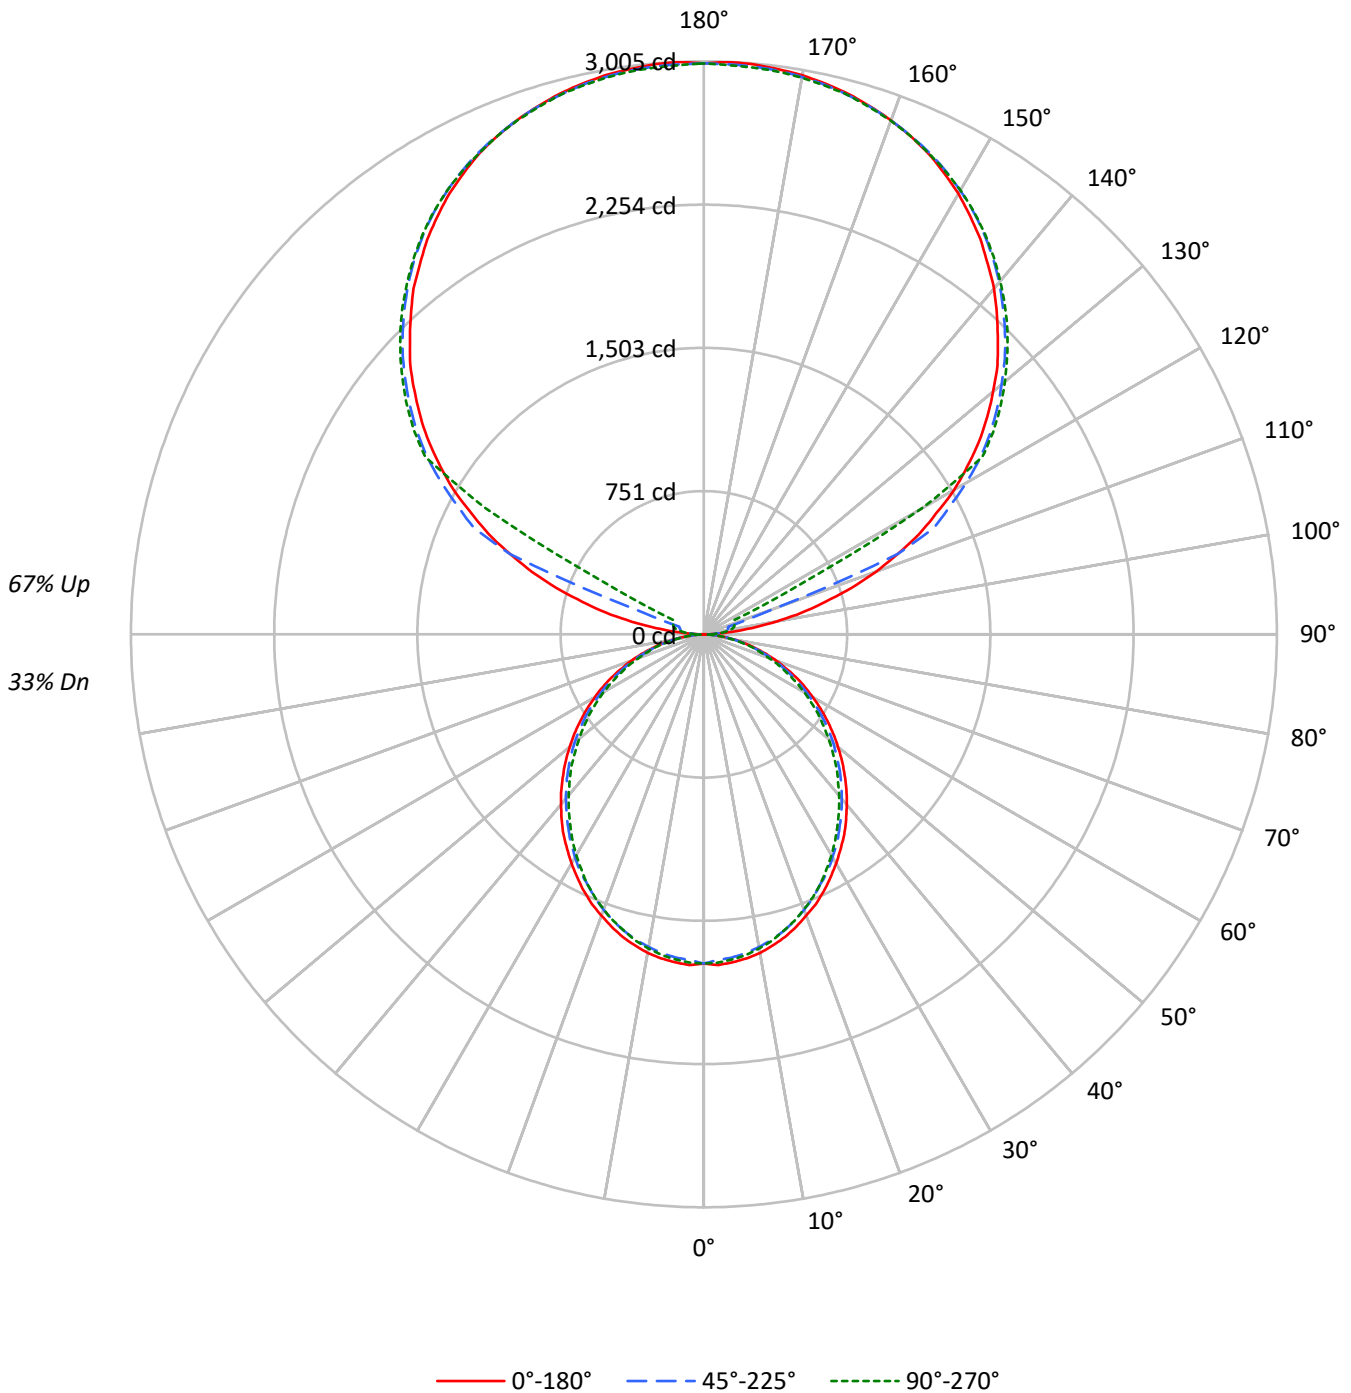



TEST NUMBER: P927860

CATALOG NUMBER: DFN2DIP-HX4F0-040D080US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33				33
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34	28				28
2	86	78	72	67	77	71	66	62	57	53	50	44	41	39	32	30	29	24				24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25	20				20
4	71	61	53	47	64	55	49	43	44	40	36	34	31	28	25	23	21	17				17
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18	15				15
6	60	48	41	35	54	44	37	32	36	31	27	28	24	21	20	18	16	13				13
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14	12				12
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13	10				10
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	13	12	9				9
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	15	12	11	9				9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1283	1283	1283
5°	1286	1266	1274
10°	1275	1249	1257
15°	1257	1228	1230
20°	1231	1200	1203
25°	1206	1166	1171
30°	1175	1134	1130
35°	1145	1097	1087
40°	1108	1059	1047
45°	1072	1021	1005
50°	1032	982	957
55°	990	936	912
60°	942	881	861
65°	891	825	801
70°	825	756	737
75°	734	674	677
80°	624	569	564
85°	453	388	375

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 1538 cd/sqm



TEST NUMBER: P927860

CATALOG NUMBER: DFN2DIP-HX4F0-040D080US850-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.5	1.2
10°-20°	457.1	3.5
20°-30°	671.7	5.1
30°-40°	780.2	5.9
40°-50°	779.2	5.9
50°-60°	679.5	5.2
60°-70°	502.3	3.8
70°-80°	284.2	2.2
80°-90°	80.3	0.6
90°-100°	98.7	0.7
100°-110°	368.1	2.8
110°-120°	976.2	7.4
120°-130°	1619.0	12.3
130°-140°	1719.8	13.1
140°-150°	1598.3	12.1
150°-160°	1285.0	9.8
160°-170°	828.0	6.3
170°-180°	285.0	2.2
0°-30°	1291.3	9.8
0°-40°	2071.5	15.7
0°-60°	3530.2	26.8
0°-90°	4396.9	33.4
90°-120°	1442.9	11.0
90°-150°	6380.0	48.4
90°-180°	8778.0	66.6
0°-180°	13175.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1726	1726	1726	1726	1726	
5°	1726	1720	1701	1714	1711	164
15°	1643	1633	1612	1618	1610	463
25°	1487	1474	1446	1449	1446	684
35°	1283	1266	1240	1230	1222	801
45°	1044	1032	1007	989	983	806
55°	790	780	760	740	732	706
65°	533	523	506	491	483	527
75°	279	276	267	257	261	298
85°	68	66	65	60	58	76
90°	2	26	43	54	58	12
95°	141	69	84	96	93	167
105°	659	724	132	156	165	704
115°	1246	1283	1337	334	178	1226
125°	1761	1790	1831	1846	1852	1571
135°	2180	2214	2234	2256	2251	1684
145°	2528	2526	2563	2578	2567	1581
155°	2784	2765	2791	2804	2786	1283
165°	2934	2921	2927	2942	2927	829
175°	3001	2985	2990	3005	2983	286
180°	2994	2994	2994	2994	2994	



TEST NUMBER: P927860

CATALOG NUMBER: DFN2DIP-HX4F0-040D080US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1726.0	1726.0	1726.0	1726.0	1726.0
2.5°	1736.1	1727.8	1709.5	1726.0	1722.9
5°	1726.0	1719.5	1701.2	1714.4	1711.3
7.5°	1714.4	1704.5	1686.2	1699.7	1696.3
10°	1696.3	1684.7	1664.8	1678.0	1673.0
12.5°	1671.3	1661.4	1641.5	1649.9	1646.4
15°	1643.1	1633.2	1611.6	1618.3	1610.0
17.5°	1608.3	1598.4	1576.8	1585.0	1576.8
20°	1570.0	1560.1	1537.0	1541.8	1535.4
22.5°	1532.0	1517.0	1495.4	1495.4	1492.0
25°	1487.1	1473.9	1445.7	1448.9	1445.7
27.5°	1437.3	1425.6	1404.2	1399.2	1391.0
30°	1387.6	1374.3	1349.4	1344.4	1337.8
32.5°	1334.5	1324.6	1298.0	1288.0	1281.2
35°	1283.0	1266.5	1239.9	1229.9	1221.6
37.5°	1224.9	1209.9	1183.3	1171.8	1163.5
40°	1165.2	1151.8	1125.2	1110.4	1103.8
42.5°	1107.1	1093.7	1067.3	1050.6	1040.7
45°	1044.0	1032.5	1007.4	989.3	982.6
47.5°	982.6	970.9	944.4	926.1	916.3
50°	917.8	909.5	886.3	863.0	854.7
52.5°	854.7	843.2	821.7	803.4	791.7
55°	790.2	780.1	760.2	740.3	732.1
57.5°	725.3	717.1	695.3	675.5	668.8
60°	660.5	654.0	630.8	612.5	607.5
62.5°	597.5	585.9	569.4	552.7	546.1
65°	532.9	522.8	506.3	491.3	483.1
67.5°	466.4	458.0	443.3	431.6	425.0
70°	405.0	398.4	383.4	371.7	365.2
72.5°	342.0	335.3	327.0	315.4	310.4
75°	278.8	275.6	267.2	257.3	260.6
77.5°	222.4	215.7	212.4	207.4	202.5
80°	166.0	164.2	160.9	156.0	152.7
82.5°	112.9	112.9	111.3	104.6	104.6
85°	68.0	66.4	64.8	59.7	58.1
87.5°	29.9	26.6	23.3	18.3	16.5
90°	2.1	26.0	43.3	54.2	58.4
92.5°	54.2	45.6	52.0	56.3	58.4
95°	140.7	69.2	84.4	95.5	93.2
97.5°	253.4	75.9	110.3	117.1	119.1
100°	383.6	86.7	123.5	140.7	145.1
102.5°	526.4	522.2	127.9	151.5	158.3
105°	658.6	723.7	132.2	155.9	164.7
107.5°	812.5	866.5	136.6	160.3	169.0
110°	960.0	1005.2	379.3	162.6	171.1



TEST NUMBER: P927860

CATALOG NUMBER: DFN2DIP-HX4F0-040D080US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1098.6	1137.4	1100.7	166.7	173.4
115°	1245.7	1282.6	1336.8	333.7	177.8
117.5°	1373.6	1416.9	1453.9	1143.8	576.3
120°	1516.7	1549.1	1588.2	1614.1	1321.6
122.5°	1637.8	1672.6	1716.1	1728.9	1731.3
125°	1761.3	1789.6	1830.7	1845.9	1852.4
127.5°	1874.0	1904.4	1937.1	1958.6	1960.7
130°	1980.2	2014.9	2038.7	2062.6	2060.5
132.5°	2088.6	2116.9	2140.6	2160.1	2158.0
135°	2179.6	2214.3	2233.6	2255.6	2251.2
137.5°	2274.9	2300.8	2322.7	2344.3	2337.9
140°	2367.9	2385.5	2409.2	2428.7	2417.8
142.5°	2446.2	2461.3	2489.4	2506.7	2495.8
145°	2528.5	2526.2	2563.0	2578.2	2567.3
147.5°	2599.8	2593.4	2630.1	2641.0	2632.4
150°	2669.3	2654.1	2688.8	2701.6	2690.9
152.5°	2727.7	2710.4	2742.8	2756.0	2740.8
155°	2784.0	2764.7	2790.7	2803.6	2786.4
157.5°	2829.5	2812.3	2831.8	2847.0	2829.5
160°	2868.7	2855.6	2868.7	2881.5	2866.3
162.5°	2903.1	2890.3	2901.0	2916.2	2896.7
165°	2933.5	2920.7	2927.1	2942.2	2927.1
167.5°	2957.4	2944.3	2950.9	2966.1	2946.6
170°	2977.0	2963.8	2968.2	2983.4	2963.8
172.5°	2989.9	2977.0	2981.3	2996.5	2977.0
175°	3000.6	2985.4	2989.9	3004.9	2983.4
177.5°	3004.9	2989.9	2992.1	3007.3	2987.8
180°	2994.2	2994.2	2994.2	2994.2	2994.2



TEST NUMBER: P927860
 CATALOG NUMBER: DFN2DIP-HX4F0-040D080US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.37	7.10	7.46	8.18	9.67	5.94	6.66	7.02	7.75	9.24
	3H	8.02	8.67	9.12	9.77	11.27	7.55	8.20	8.64	9.29	10.80
	4H	8.60	9.22	9.71	10.32	11.83	8.13	8.75	9.23	9.84	11.36
	6H	8.99	9.56	10.11	10.66	12.19	8.52	9.09	9.63	10.19	11.71
	8H	9.10	9.64	10.21	10.75	12.27	8.62	9.16	9.74	10.28	11.80
	12H	9.14	9.66	10.26	10.76	12.31	8.66	9.17	9.78	10.28	11.83
4H	2H	6.81	7.43	7.93	8.53	10.04	6.47	7.09	7.58	8.19	9.70
	3H	8.67	9.19	9.79	10.31	11.83	8.28	8.79	9.40	9.92	11.44
	4H	9.38	9.85	10.50	10.97	12.51	8.97	9.45	10.10	10.56	12.11
	6H	9.89	10.29	11.02	11.43	12.97	9.48	9.88	10.61	11.02	12.56
	8H	10.03	10.41	11.16	11.54	13.10	9.62	10.00	10.75	11.13	12.68
	12H	10.10	10.45	11.25	11.58	13.14	9.68	10.02	10.83	11.16	12.72
8H	4H	9.56	9.95	10.70	11.07	12.63	9.20	9.58	10.33	10.71	12.27
	6H	10.19	10.51	11.34	11.68	13.23	9.83	10.14	10.98	11.31	12.86
	8H	10.41	10.69	11.57	11.84	13.41	10.04	10.32	11.20	11.47	13.04
	12H	10.54	10.78	11.70	11.93	13.53	10.15	10.39	11.31	11.54	13.15
12H	4H	9.54	9.89	10.69	11.03	12.59	9.19	9.54	10.34	10.68	12.24
	6H	10.22	10.50	11.38	11.64	13.22	9.87	10.14	11.03	11.29	12.86
	8H	10.46	10.70	11.62	11.84	13.45	10.10	10.34	11.26	11.49	13.09