

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P927866

Luminaire Tested: DFN2DIP-HX4F0-040D090US850-RLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P927866
REPORT IS A COMBINATION OF REPORTS P900910 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-040D090US850-RLLONL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13651.8 lumens
Efficiency: N/A
Efficacy: 134.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 101.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P927866

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US850-RLLONL

Luminous Intensity Polar Plot

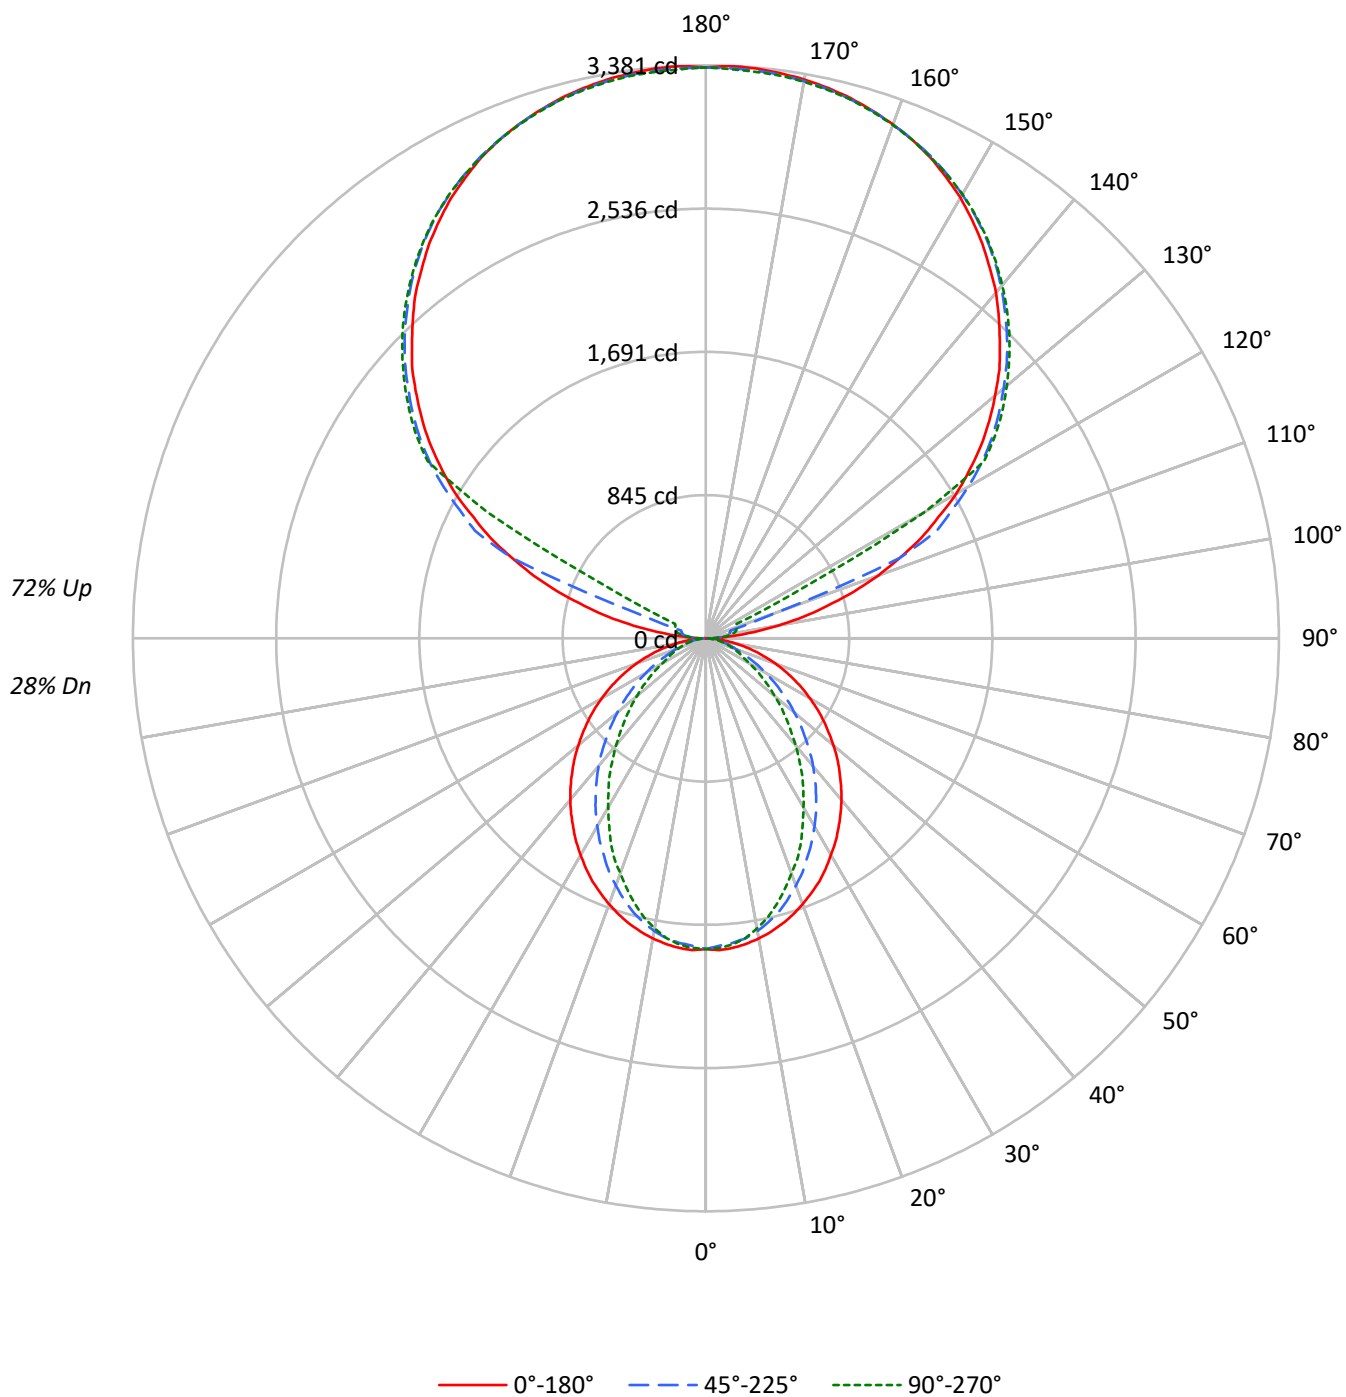

TEST NUMBER: P927866

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36
1	93	89	85	82	83	80	77	74	62	60	59	46	45	44	32	31	31
2	85	78	72	67	76	70	65	61	55	52	49	41	39	37	28	27	26
3	78	69	62	56	69	62	56	51	49	45	41	37	34	32	25	24	22
4	71	61	53	48	63	55	48	44	43	39	35	33	30	27	23	21	20
5	65	54	47	41	58	49	42	37	39	34	30	29	26	24	21	19	17
6	60	49	41	35	54	44	37	32	35	30	27	27	23	21	19	17	15
7	55	44	36	31	49	40	33	28	32	27	23	24	21	18	17	15	14
8	51	40	32	27	46	36	30	25	29	24	21	22	19	16	16	14	12
9	48	36	29	24	43	33	27	22	26	22	19	20	17	15	15	13	11
10	45	33	26	22	40	30	24	20	24	20	17	19	16	13	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1363	1363	1363
5°	1366	1342	1350
10°	1352	1316	1306
15°	1334	1272	1239
20°	1309	1212	1155
25°	1284	1145	1075
30°	1250	1077	973
35°	1217	1003	883
40°	1184	926	780
45°	1144	841	687
50°	1104	755	596
55°	1062	664	509
60°	1013	568	419
65°	957	470	377
70°	889	379	341
75°	803	335	311
80°	680	281	270
85°	475	188	203

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1730 cd/sqm

TEST NUMBER: P927866

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	171.8	1.3
10°-20°	471.7	3.5
20°-30°	662.3	4.9
30°-40°	721.9	5.3
40°-50°	663.5	4.9
50°-60°	521.1	3.8
60°-70°	339.2	2.5
70°-80°	174.6	1.3
80°-90°	50.5	0.4
90°-100°	111.1	0.8
100°-110°	414.0	3.0
110°-120°	1098.2	8.0
120°-130°	1821.4	13.3
130°-140°	1934.7	14.2
140°-150°	1798.1	13.2
150°-160°	1445.6	10.6
160°-170°	931.5	6.8
170°-180°	320.6	2.3
0°-30°	1305.8	9.6
0°-40°	2027.7	14.9
0°-60°	3212.2	23.5
0°-90°	3776.5	27.7
90°-120°	1623.3	11.9
90°-150°	7177.5	52.6
90°-180°	9875.0	72.3
0°-180°	13651.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1833	1833	1833	1833	1833	
5°	1833	1825	1804	1818	1814	174
15°	1744	1726	1669	1638	1621	491
25°	1583	1530	1420	1352	1327	728
35°	1364	1279	1133	1029	992	854
45°	1115	1004	830	712	672	861
55°	848	718	539	440	408	758
65°	572	438	289	232	227	568
75°	305	189	133	121	120	323
85°	71	36	32	32	32	82
90°	2	29	49	61	66	13
95°	158	78	95	107	105	188
105°	741	814	149	175	185	792
115°	1401	1443	1504	375	200	1380
125°	1982	2013	2060	2077	2084	1767
135°	2452	2491	2513	2538	2533	1894
145°	2845	2842	2883	2900	2888	1779
155°	3132	3110	3140	3154	3135	1443
165°	3300	3286	3293	3310	3293	932
175°	3376	3359	3364	3381	3356	321
180°	3368	3368	3368	3368	3368	

TEST NUMBER: P927866

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1833.4	1833.4	1833.4	1833.4	1833.4
2.5°	1841.7	1833.4	1815.1	1831.8	1828.4
5°	1833.4	1825.1	1803.5	1818.4	1813.5
7.5°	1818.4	1808.6	1785.4	1791.8	1783.6
10°	1798.6	1786.9	1753.8	1748.7	1738.9
12.5°	1773.7	1758.8	1713.8	1704.0	1685.7
15°	1743.8	1725.5	1669.2	1637.7	1621.1
17.5°	1709.0	1682.4	1612.6	1576.2	1549.6
20°	1669.2	1635.9	1552.9	1511.6	1475.0
22.5°	1626.0	1587.9	1491.5	1435.2	1410.4
25°	1582.9	1529.8	1420.2	1352.3	1327.3
27.5°	1531.5	1475.0	1353.9	1275.9	1237.6
30°	1476.7	1413.5	1280.8	1196.3	1151.5
32.5°	1423.6	1347.2	1211.2	1111.7	1070.1
35°	1364.0	1279.2	1133.3	1028.7	992.1
37.5°	1305.8	1214.5	1060.2	945.6	904.3
40°	1244.4	1144.9	983.9	866.1	823.0
42.5°	1181.3	1075.2	907.6	784.7	743.4
45°	1115.0	1003.8	829.6	711.8	671.9
47.5°	1052.0	934.2	755.0	637.1	600.6
50°	982.2	864.5	681.9	567.4	532.7
52.5°	914.1	789.7	612.3	502.7	471.2
55°	847.8	718.4	539.2	439.7	408.2
57.5°	779.8	647.1	474.5	381.6	355.1
60°	710.1	577.3	406.4	321.9	295.4
62.5°	642.2	509.5	348.3	268.8	255.6
65°	572.5	437.9	288.7	232.3	227.2
67.5°	506.1	371.6	232.3	204.1	199.1
70°	436.4	307.0	192.4	175.9	169.1
72.5°	370.1	247.2	160.9	147.7	144.4
75°	305.2	189.1	132.7	121.1	119.6
77.5°	240.7	134.3	104.6	97.9	94.5
80°	180.8	96.3	79.5	73.1	73.1
82.5°	126.1	64.8	54.8	51.3	51.3
85°	71.3	36.5	31.5	31.5	31.5
87.5°	26.6	13.2	13.2	11.6	11.6
90°	2.3	29.3	48.6	61.1	65.7
92.5°	61.1	51.2	58.4	63.4	65.7
95°	158.4	77.9	94.9	107.4	104.8
97.5°	285.1	85.4	124.2	131.6	134.0
100°	431.5	97.6	139.0	158.4	163.2
102.5°	592.2	587.5	143.8	170.5	178.0
105°	740.9	814.2	148.7	175.4	185.2
107.5°	914.0	974.8	153.7	180.3	190.2
110°	1079.8	1130.8	426.6	182.9	192.5

TEST NUMBER: P927866

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1235.9	1279.6	1238.2	187.5	195.1
115°	1401.4	1442.8	1503.9	375.4	200.0
117.5°	1545.3	1594.0	1635.6	1286.9	648.3
120°	1706.2	1742.7	1786.7	1815.9	1486.8
122.5°	1842.6	1881.6	1930.5	1945.0	1947.6
125°	1981.5	2013.3	2059.6	2076.7	2083.9
127.5°	2108.2	2142.4	2179.2	2203.5	2205.8
130°	2227.8	2266.9	2293.5	2320.4	2318.1
132.5°	2349.6	2381.5	2408.1	2430.2	2427.8
135°	2452.1	2491.1	2512.9	2537.5	2532.6
137.5°	2559.2	2588.4	2613.0	2637.3	2630.1
140°	2663.9	2683.7	2710.3	2732.2	2720.2
142.5°	2752.0	2769.1	2800.6	2820.0	2807.9
145°	2844.6	2841.9	2883.4	2900.5	2888.3
147.5°	2924.8	2917.6	2958.9	2971.1	2961.5
150°	3003.0	2985.9	3024.9	3039.3	3027.2
152.5°	3068.6	3049.2	3085.7	3100.4	3083.4
155°	3132.0	3110.3	3139.5	3154.0	3134.6
157.5°	3183.3	3163.9	3185.8	3202.9	3183.3
160°	3227.2	3212.4	3227.2	3241.7	3224.6
162.5°	3266.0	3251.5	3263.7	3280.8	3258.8
165°	3300.2	3285.6	3293.0	3310.0	3293.0
167.5°	3327.1	3312.4	3319.8	3336.9	3314.9
170°	3349.1	3334.3	3339.2	3356.3	3334.3
172.5°	3363.6	3349.1	3353.9	3371.0	3349.1
175°	3375.7	3358.6	3363.6	3380.6	3356.3
177.5°	3380.6	3363.6	3366.1	3383.2	3361.3
180°	3368.5	3368.5	3368.5	3368.5	3368.5

TEST NUMBER: P927866

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.66	6.34	6.79	7.46	9.02	1.63	2.31	2.77	3.43	4.99
	3H	7.33	7.93	8.47	9.06	10.64	2.81	3.42	3.95	4.55	6.12
	4H	7.93	8.50	9.08	9.63	11.21	3.26	3.83	4.41	4.96	6.54
	6H	8.34	8.87	9.50	10.00	11.60	3.57	4.10	4.73	5.23	6.82
	8H	8.47	8.97	9.63	10.12	11.70	3.66	4.16	4.82	5.31	6.89
	12H	8.52	9.00	9.69	10.14	11.75	3.70	4.17	4.86	5.31	6.92
4H	2H	5.66	6.23	6.82	7.36	8.94	2.21	2.78	3.37	3.91	5.49
	3H	7.48	7.95	8.64	9.11	10.70	3.55	4.03	4.71	5.18	6.77
	4H	8.16	8.60	9.33	9.75	11.36	4.09	4.53	5.26	5.68	7.29
	6H	8.67	9.05	9.84	10.21	11.82	4.51	4.88	5.67	6.05	7.65
	8H	8.84	9.19	10.01	10.35	11.97	4.63	4.98	5.80	6.14	7.76
	12H	8.93	9.25	10.12	10.42	12.04	4.69	5.01	5.87	6.18	7.80
8H	4H	8.12	8.47	9.29	9.63	11.25	4.36	4.71	5.53	5.87	7.49
	6H	8.68	8.97	9.87	10.17	11.79	4.88	5.17	6.06	6.37	7.98
	8H	8.90	9.15	10.09	10.33	11.97	5.07	5.32	6.26	6.50	8.13
	12H	9.03	9.25	10.23	10.43	12.10	5.18	5.40	6.38	6.58	8.25
12H	4H	8.07	8.38	9.25	9.55	11.18	4.36	4.68	5.54	5.85	7.47
	6H	8.66	8.91	9.85	10.09	11.72	4.93	5.18	6.12	6.36	7.99
	8H	8.87	9.09	10.07	10.27	11.94	5.13	5.35	6.33	6.53	8.20

END OF REPORT