

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910884

Luminaire Tested: DFN2DIP-HX4F0-040D110US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910884
REPORT IS A COMBINATION OF REPORTS P899425 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-040D110US850-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15187.7 lumens
Efficiency: N/A
Efficacy: 154.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 98.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910884

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US850-FLLFLL

Luminous Intensity Polar Plot

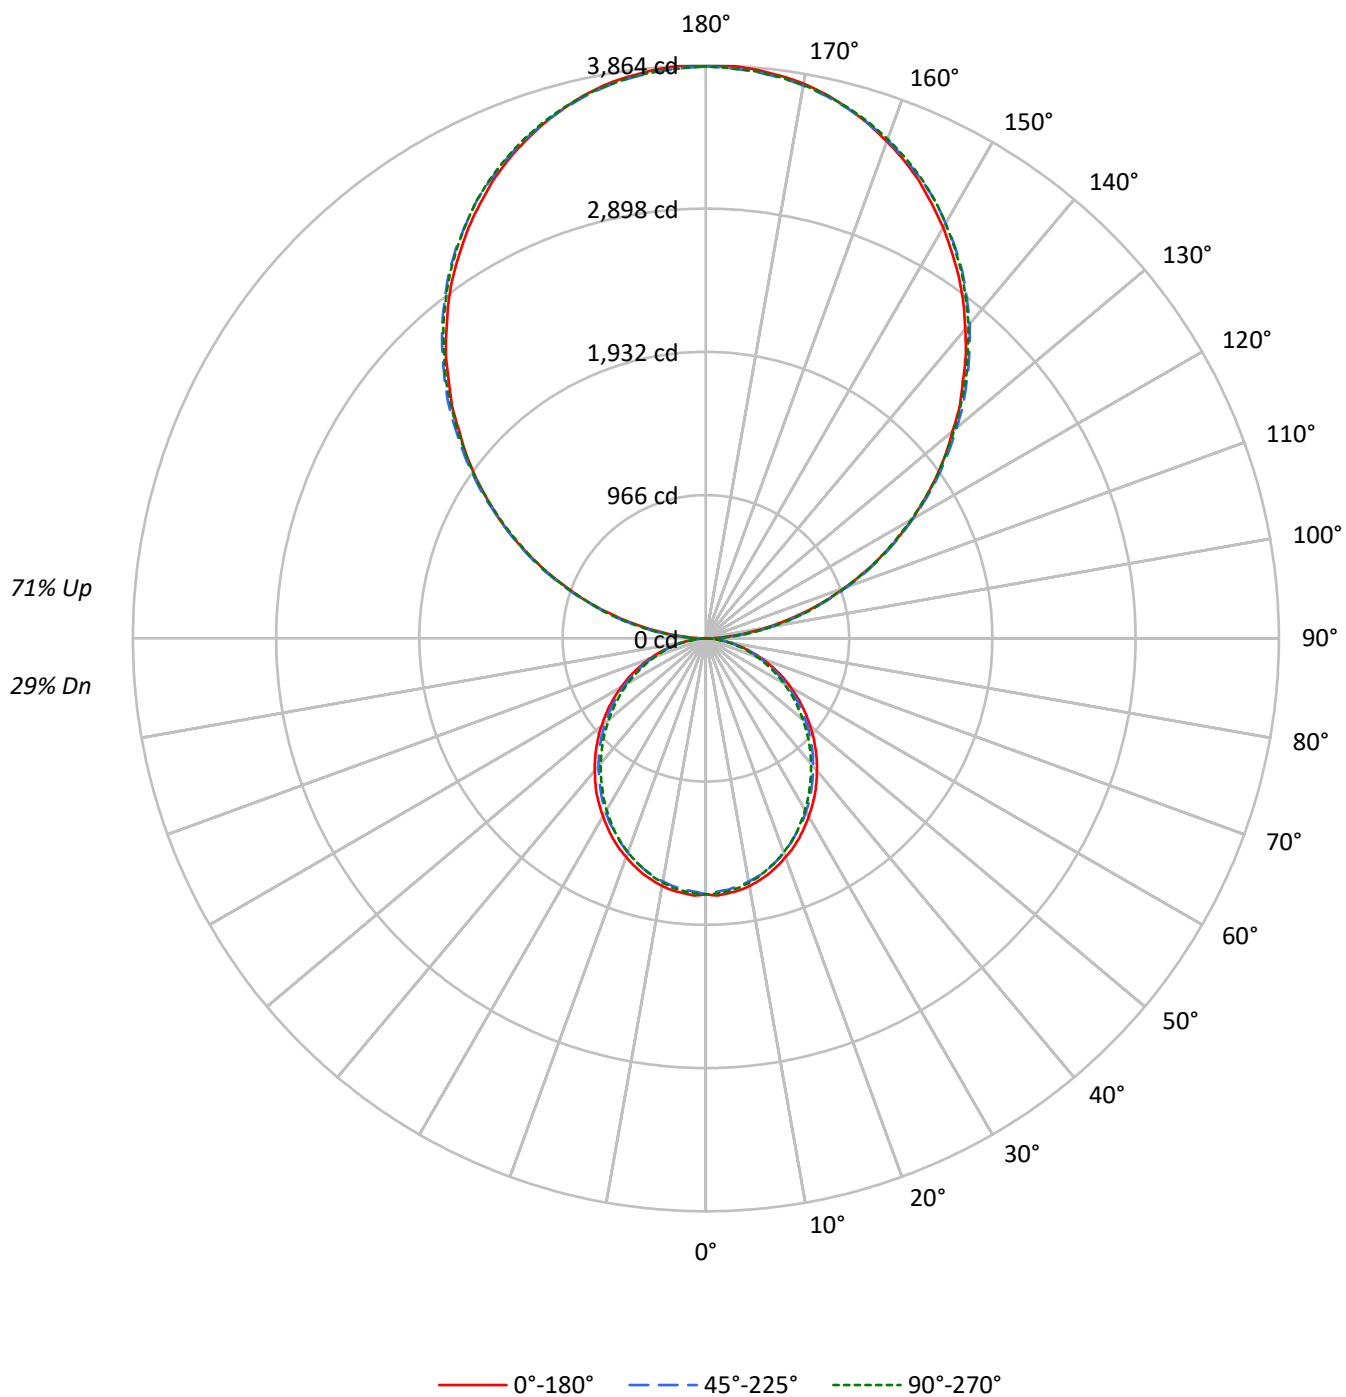

TEST NUMBER: P910884

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US850-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	37	37	37
1	93	89	85	82	83	80	77	74	63	61	59	47	46	44	32	32	31
2	85	78	72	67	76	70	65	60	55	51	48	41	39	37	29	27	26
3	77	68	61	55	69	61	55	50	48	44	41	36	34	31	25	24	22
4	71	60	53	47	63	54	48	43	43	38	35	32	29	27	23	21	19
5	65	53	46	40	58	48	41	36	38	33	30	29	26	23	20	18	17
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	15
7	55	43	35	30	49	39	32	27	31	26	23	24	20	18	17	15	13
8	51	39	31	26	45	35	29	24	28	23	20	22	18	16	15	13	12
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10
10	44	32	25	21	39	29	23	19	24	19	16	18	15	13	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1283	1283	1283
5°	1286	1266	1274
10°	1275	1249	1257
15°	1257	1228	1230
20°	1231	1200	1203
25°	1206	1166	1171
30°	1175	1134	1130
35°	1145	1097	1087
40°	1108	1059	1047
45°	1072	1021	1005
50°	1032	982	957
55°	990	936	912
60°	942	881	861
65°	891	825	801
70°	825	756	737
75°	734	674	677
80°	624	569	564
85°	453	388	375

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2909 cd/sqm

TEST NUMBER: P910884

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US850-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.5	1.1
10°-20°	457.1	3.0
20°-30°	671.7	4.4
30°-40°	780.2	5.1
40°-50°	779.2	5.1
50°-60°	679.5	4.5
60°-70°	502.3	3.3
70°-80°	284.2	1.9
80°-90°	86.0	0.6
90°-100°	238.7	1.6
100°-110°	758.6	5.0
110°-120°	1298.1	8.5
120°-130°	1707.2	11.2
130°-140°	1916.3	12.6
140°-150°	1879.1	12.4
150°-160°	1576.3	10.4
160°-170°	1045.4	6.9
170°-180°	365.4	2.4
0°-30°	1291.3	8.5
0°-40°	2071.5	13.6
0°-60°	3530.2	23.2
0°-90°	4402.6	29.0
90°-120°	2295.4	15.1
90°-150°	7798.0	51.3
90°-180°	10785.0	71.0
0°-180°	15187.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1726	1726	1726	1726	1726	
5°	1726	1720	1701	1714	1711	164
15°	1643	1633	1612	1618	1610	463
25°	1487	1474	1446	1449	1446	684
35°	1283	1266	1240	1230	1222	801
45°	1044	1032	1007	989	983	806
55°	790	780	760	740	732	706
65°	533	523	506	491	483	527
75°	279	276	267	257	261	298
85°	68	66	65	60	58	76
90°	3	42	114	107	110	15
95°	170	202	208	208	202	189
105°	700	710	716	722	722	739
115°	1303	1321	1316	1312	1303	1288
125°	1895	1924	1914	1904	1900	1693
135°	2451	2487	2494	2490	2481	1894
145°	2975	2998	3017	3021	3008	1859
155°	3402	3411	3422	3438	3428	1566
165°	3701	3698	3698	3721	3704	1044
175°	3851	3842	3835	3858	3838	366
180°	3858	3858	3858	3858	3858	

TEST NUMBER: P910884

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1726.0	1726.0	1726.0	1726.0	1726.0
2.5°	1736.1	1727.8	1709.5	1726.0	1722.9
5°	1726.0	1719.5	1701.2	1714.4	1711.3
7.5°	1714.4	1704.5	1686.2	1699.7	1696.3
10°	1696.3	1684.7	1664.8	1678.0	1673.0
12.5°	1671.3	1661.4	1641.5	1649.9	1646.4
15°	1643.1	1633.2	1611.6	1618.3	1610.0
17.5°	1608.3	1598.4	1576.8	1585.0	1576.8
20°	1570.0	1560.1	1537.0	1541.8	1535.4
22.5°	1532.0	1517.0	1495.4	1495.4	1492.0
25°	1487.1	1473.9	1445.7	1448.9	1445.7
27.5°	1437.3	1425.6	1404.2	1399.2	1391.0
30°	1387.6	1374.3	1349.4	1344.4	1337.8
32.5°	1334.5	1324.6	1298.0	1288.0	1281.2
35°	1283.0	1266.5	1239.9	1229.9	1221.6
37.5°	1224.9	1209.9	1183.3	1171.8	1163.5
40°	1165.2	1151.8	1125.2	1110.4	1103.8
42.5°	1107.1	1093.7	1067.3	1050.6	1040.7
45°	1044.0	1032.5	1007.4	989.3	982.6
47.5°	982.6	970.9	944.4	926.1	916.3
50°	917.8	909.5	886.3	863.0	854.7
52.5°	854.7	843.2	821.7	803.4	791.7
55°	790.2	780.1	760.2	740.3	732.1
57.5°	725.3	717.1	695.3	675.5	668.8
60°	660.5	654.0	630.8	612.5	607.5
62.5°	597.5	585.9	569.4	552.7	546.1
65°	532.9	522.8	506.3	491.3	483.1
67.5°	466.4	458.0	443.3	431.6	425.0
70°	405.0	398.4	383.4	371.7	365.2
72.5°	342.0	335.3	327.0	315.4	310.4
75°	278.8	275.6	267.2	257.3	260.6
77.5°	222.4	215.7	212.4	207.4	202.5
80°	166.0	164.2	160.9	156.0	152.7
82.5°	112.9	112.9	111.3	104.6	104.6
85°	68.0	66.4	64.8	59.7	58.1
87.5°	29.9	26.6	23.3	18.3	16.5
90°	3.4	41.9	114.0	107.0	110.5
92.5°	72.1	97.7	101.1	104.7	104.7
95°	169.8	202.4	208.2	208.2	202.4
97.5°	282.7	312.8	325.7	325.7	325.7
100°	412.9	439.6	448.9	448.9	445.5
102.5°	550.2	569.9	582.8	586.2	582.8
105°	700.2	709.5	716.5	722.3	722.3
107.5°	849.1	863.0	863.0	865.4	849.1
110°	993.3	1012.0	1012.0	1012.0	1002.6

TEST NUMBER: P910884

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1149.1	1168.9	1165.4	1156.1	1149.1
115°	1302.7	1321.3	1315.5	1312.1	1302.7
117.5°	1455.1	1480.6	1464.3	1455.1	1445.8
120°	1608.6	1634.2	1608.6	1608.6	1598.2
122.5°	1748.2	1780.7	1764.4	1755.1	1748.2
125°	1894.7	1923.8	1914.5	1904.0	1900.5
127.5°	2037.8	2073.8	2061.1	2047.1	2037.8
130°	2171.5	2213.5	2207.6	2200.6	2187.8
132.5°	2321.6	2354.2	2356.5	2340.2	2330.9
135°	2450.7	2486.7	2493.7	2490.3	2480.9
137.5°	2594.9	2624.0	2629.8	2627.4	2613.6
140°	2721.7	2750.8	2767.1	2767.1	2754.3
142.5°	2852.0	2881.1	2890.4	2893.8	2881.1
145°	2975.2	2998.5	3017.1	3020.6	3007.8
147.5°	3085.8	3114.8	3128.8	3134.6	3121.8
150°	3199.8	3219.5	3232.3	3242.8	3232.3
152.5°	3300.9	3320.7	3337.0	3349.8	3337.0
155°	3402.2	3411.4	3421.9	3438.2	3427.7
157.5°	3489.4	3496.3	3502.1	3525.4	3509.1
160°	3567.3	3574.3	3577.7	3597.6	3583.6
162.5°	3639.4	3639.4	3643.0	3665.0	3648.7
165°	3701.1	3697.5	3697.5	3720.8	3704.5
167.5°	3756.8	3746.4	3746.4	3769.7	3753.4
170°	3798.8	3789.5	3786.0	3809.2	3789.5
172.5°	3827.8	3818.5	3815.1	3838.4	3818.5
175°	3851.1	3841.8	3834.8	3858.1	3838.4
177.5°	3863.9	3854.6	3847.6	3867.4	3847.6
180°	3858.1	3858.1	3858.1	3858.1	3858.1

TEST NUMBER: P910884

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.78	6.48	6.90	7.59	9.14	5.35	6.05	6.47	7.16	8.71
	3H	7.43	8.06	8.56	9.18	10.74	6.96	7.58	8.09	8.71	10.26
	4H	8.01	8.61	9.15	9.73	11.29	7.54	8.13	8.67	9.26	10.82
	6H	8.40	8.95	9.55	10.08	11.65	7.93	8.48	9.07	9.60	11.18
	8H	8.50	9.03	9.65	10.16	11.73	8.03	8.55	9.18	9.69	11.26
	12H	8.55	9.04	9.70	10.18	11.77	8.07	8.56	9.22	9.69	11.29
4H	2H	6.22	6.82	7.37	7.94	9.51	5.88	6.48	7.02	7.60	9.16
	3H	8.08	8.57	9.23	9.72	11.30	7.68	8.18	8.83	9.33	10.90
	4H	8.79	9.24	9.94	10.38	11.97	8.38	8.84	9.53	9.97	11.57
	6H	9.29	9.68	10.45	10.84	12.43	8.88	9.27	10.04	10.43	12.02
	8H	9.44	9.80	10.60	10.95	12.56	9.03	9.39	10.18	10.54	12.15
	12H	9.50	9.84	10.68	11.00	12.61	9.08	9.41	10.26	10.58	12.18
8H	4H	8.97	9.33	10.13	10.49	12.09	8.61	8.97	9.77	10.13	11.73
	6H	9.59	9.90	10.77	11.09	12.69	9.23	9.53	10.41	10.73	12.33
	8H	9.81	10.08	11.00	11.25	12.87	9.45	9.71	10.63	10.88	12.50
	12H	9.94	10.17	11.13	11.34	12.99	9.55	9.79	10.74	10.95	12.61
12H	4H	8.95	9.28	10.12	10.44	12.05	8.59	8.93	9.77	10.09	11.70
	6H	9.62	9.89	10.81	11.06	12.68	9.27	9.54	10.45	10.71	12.33
	8H	9.86	10.09	11.05	11.26	12.91	9.50	9.73	10.69	10.90	12.55