

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910937

Luminaire Tested: DFN2DIP-HX4F0-070D100US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910937
REPORT IS A COMBINATION OF REPORTS P899414 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-070D100US850-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 16413.2 lumens
Efficiency: N/A
Efficacy: 132.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 124
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910937
CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLLFLL

Luminous Intensity Polar Plot

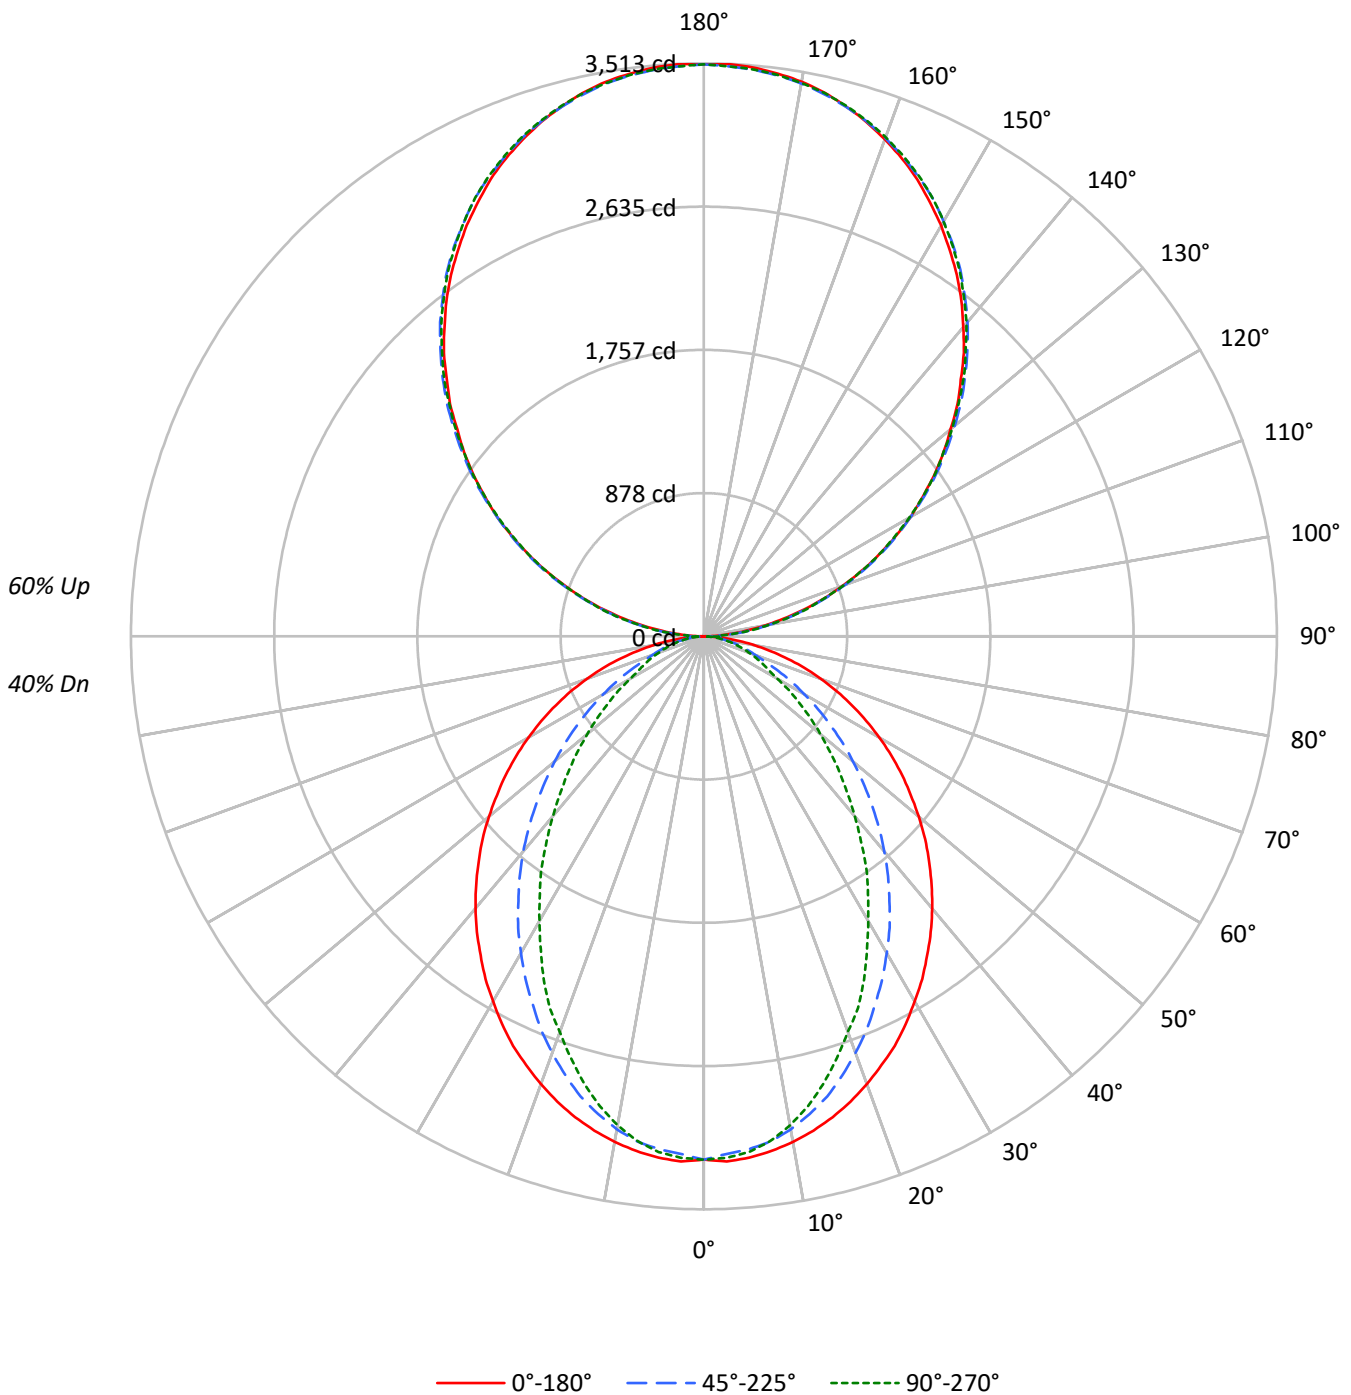



TEST NUMBER: P910937

CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	47	47	47	40
1	96	92	88	85	87	84	81	78	69	67	65	55	54	52	42	41	41	41	41	41	35
2	88	81	75	70	80	74	69	65	61	57	54	49	46	44	38	36	35	35	35	35	30
3	80	71	64	59	73	65	59	54	54	50	46	43	40	38	34	32	30	30	30	30	26
4	74	63	56	50	67	58	51	46	48	43	39	39	35	33	30	28	26	26	26	26	22
5	68	56	49	43	61	52	45	40	43	38	34	35	31	29	28	25	23	23	23	23	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	20	20	20	20	17
7	58	46	38	33	53	42	35	31	35	30	27	29	25	22	23	20	18	18	18	18	16
8	54	42	34	29	49	38	32	27	32	27	24	27	23	20	21	19	17	17	17	17	14
9	50	38	31	26	45	35	29	24	30	25	21	25	21	18	20	17	15	15	15	15	13
10	47	35	28	23	43	32	26	22	27	22	19	23	19	16	18	16	14	14	14	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2386	2386	2386
5°	2390	2348	2363
10°	2366	2302	2286
15°	2334	2226	2167
20°	2291	2122	2022
25°	2247	2004	1881
30°	2188	1884	1702
35°	2130	1755	1546
40°	2071	1621	1365
45°	2003	1472	1203
50°	1932	1322	1043
55°	1858	1161	890
60°	1773	994	733
65°	1675	823	660
70°	1556	664	597
75°	1406	586	544
80°	1190	492	472
85°	832	330	355

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 2646 cd/sqm



TEST NUMBER: P910937

CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	300.7	1.8
10°-20°	825.5	5.0
20°-30°	1158.9	7.1
30°-40°	1263.3	7.7
40°-50°	1161.1	7.1
50°-60°	911.9	5.6
60°-70°	593.5	3.6
70°-80°	305.5	1.9
80°-90°	88.0	0.5
90°-100°	217.0	1.3
100°-110°	689.6	4.2
110°-120°	1180.1	7.2
120°-130°	1552.0	9.5
130°-140°	1742.1	10.6
140°-150°	1708.3	10.4
150°-160°	1433.0	8.7
160°-170°	950.4	5.8
170°-180°	332.2	2.0
0°-30°	2285.1	13.9
0°-40°	3548.4	21.6
0°-60°	5621.4	34.2
0°-90°	6608.5	40.3
90°-120°	2086.7	12.7
90°-150°	7089.1	43.2
90°-180°	9805.0	59.7
0°-180°	16413.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3208	3208	3208	3208	3208	
5°	3208	3194	3156	3182	3174	304
15°	3052	3020	2921	2866	2837	860
25°	2770	2677	2485	2366	2323	1274
35°	2387	2239	1983	1800	1736	1494
45°	1951	1756	1452	1246	1176	1507
55°	1484	1257	944	770	714	1326
65°	1002	766	505	407	398	993
75°	534	331	232	212	209	565
85°	125	64	55	55	55	143
90°	3	38	104	97	100	16
95°	154	184	189	189	184	172
105°	637	645	651	657	657	672
115°	1184	1201	1196	1193	1184	1171
125°	1722	1749	1740	1731	1728	1539
135°	2228	2261	2267	2264	2255	1722
145°	2705	2726	2743	2746	2734	1690
155°	3093	3101	3111	3126	3116	1424
165°	3365	3361	3361	3383	3368	949
175°	3501	3493	3486	3507	3489	333
180°	3507	3507	3507	3507	3507	



TEST NUMBER: P910937

CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3208.4	3208.4	3208.4	3208.4	3208.4
2.5°	3222.9	3208.4	3176.4	3205.7	3199.8
5°	3208.4	3193.9	3156.1	3182.3	3173.6
7.5°	3182.3	3165.0	3124.4	3135.7	3121.3
10°	3147.5	3127.2	3069.2	3060.3	3043.0
12.5°	3104.0	3077.8	2999.3	2982.0	2949.9
15°	3051.6	3019.6	2921.0	2865.9	2836.9
17.5°	2990.6	2944.2	2822.2	2758.3	2711.8
20°	2921.0	2862.8	2717.7	2645.3	2581.2
22.5°	2845.6	2778.7	2610.1	2511.6	2468.2
25°	2770.1	2677.0	2485.4	2366.5	2322.8
27.5°	2680.1	2581.2	2369.3	2232.9	2166.0
30°	2584.3	2473.7	2241.4	2093.6	2015.1
32.5°	2491.3	2357.6	2119.7	1945.4	1872.7
35°	2386.8	2238.6	1983.3	1800.4	1736.3
37.5°	2285.2	2125.3	1855.5	1654.8	1582.5
40°	2177.6	2003.6	1721.7	1515.7	1440.1
42.5°	2067.4	1881.6	1588.3	1373.3	1301.0
45°	1951.3	1756.5	1451.9	1245.5	1175.9
47.5°	1840.9	1634.9	1321.3	1114.9	1051.1
50°	1719.0	1512.9	1193.4	992.9	932.2
52.5°	1599.7	1381.9	1071.4	879.8	824.7
55°	1483.6	1257.2	943.5	769.5	714.4
57.5°	1364.7	1132.4	830.5	667.8	621.4
60°	1242.7	1010.4	711.3	563.5	516.9
62.5°	1123.7	891.5	609.6	470.4	447.3
65°	1001.8	766.4	505.3	406.7	397.7
67.5°	885.6	650.3	406.7	357.0	348.4
70°	763.7	537.2	336.7	307.7	296.0
72.5°	647.5	432.5	281.6	258.5	252.6
75°	534.2	330.8	232.2	211.9	209.2
77.5°	421.1	235.0	183.0	171.2	165.5
80°	316.4	168.5	139.3	127.9	127.9
82.5°	220.6	113.3	95.8	89.9	89.9
85°	124.8	63.8	55.1	55.1	55.1
87.5°	46.5	23.1	23.1	20.3	20.3
90°	3.2	38.0	103.6	97.3	100.5
92.5°	65.5	88.8	92.0	95.2	95.2
95°	154.4	184.0	189.3	189.3	184.0
97.5°	257.0	284.5	296.1	296.1	296.1
100°	375.4	399.7	408.1	408.1	405.0
102.5°	500.2	518.1	529.8	532.9	529.8
105°	636.6	645.0	651.3	656.6	656.6
107.5°	771.9	784.6	784.6	786.7	771.9
110°	903.1	919.9	919.9	919.9	911.5



TEST NUMBER: P910937

CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1044.7	1062.6	1059.5	1051.0	1044.7
115°	1184.3	1201.2	1195.9	1192.7	1184.3
117.5°	1322.8	1346.1	1331.2	1322.8	1314.3
120°	1462.3	1485.6	1462.3	1462.3	1452.9
122.5°	1589.2	1618.8	1604.1	1595.6	1589.2
125°	1722.5	1748.9	1740.5	1730.9	1727.8
127.5°	1852.6	1885.3	1873.7	1861.0	1852.6
130°	1974.1	2012.2	2007.0	2000.5	1989.0
132.5°	2110.5	2140.1	2142.3	2127.5	2119.0
135°	2227.9	2260.7	2267.0	2263.9	2255.4
137.5°	2359.1	2385.5	2390.8	2388.7	2375.9
140°	2474.3	2500.7	2515.5	2515.5	2503.9
142.5°	2592.7	2619.1	2627.6	2630.8	2619.1
145°	2704.7	2725.9	2742.9	2746.0	2734.4
147.5°	2805.2	2831.7	2844.4	2849.7	2838.0
150°	2908.9	2926.9	2938.5	2947.9	2938.5
152.5°	3000.8	3018.8	3033.7	3045.3	3033.7
155°	3092.9	3101.3	3110.9	3125.6	3116.1
157.5°	3172.2	3178.5	3183.8	3204.9	3190.1
160°	3243.0	3249.4	3252.5	3270.4	3257.8
162.5°	3308.6	3308.6	3311.7	3331.8	3317.0
165°	3364.6	3361.4	3361.4	3382.6	3367.8
167.5°	3415.4	3405.8	3405.8	3427.0	3412.2
170°	3453.4	3445.0	3441.8	3463.0	3445.0
172.5°	3479.8	3471.4	3468.2	3489.4	3471.4
175°	3501.0	3492.6	3486.3	3507.3	3489.4
177.5°	3512.6	3504.2	3497.8	3515.8	3497.8
180°	3507.3	3507.3	3507.3	3507.3	3507.3



TEST NUMBER: P910937
 CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.18	9.94	10.23	10.99	12.39	5.16	5.91	6.20	6.96	8.36
	3H	10.86	11.53	11.91	12.59	14.01	6.34	7.02	7.39	8.07	9.50
	4H	11.46	12.10	12.53	13.16	14.59	6.79	7.43	7.85	8.49	9.92
	6H	11.88	12.47	12.95	13.53	14.97	7.11	7.70	8.18	8.76	10.20
	8H	12.01	12.57	13.08	13.64	15.08	7.20	7.76	8.28	8.83	10.27
	12H	12.07	12.60	13.15	13.67	15.13	7.24	7.77	8.32	8.84	10.30
4H	2H	9.19	9.83	10.26	10.89	12.32	5.74	6.39	6.81	7.44	8.87
	3H	11.02	11.55	12.10	12.63	14.08	7.09	7.62	8.17	8.70	10.15
	4H	11.71	12.20	12.79	13.27	14.74	7.64	8.12	8.72	9.20	10.66
	6H	12.22	12.64	13.31	13.73	15.20	8.05	8.47	9.14	9.57	11.03
	8H	12.39	12.78	13.49	13.87	15.35	8.18	8.57	9.27	9.66	11.14
	12H	12.49	12.84	13.59	13.94	15.42	8.24	8.60	9.35	9.70	11.18
8H	4H	11.67	12.06	12.76	13.15	14.63	7.91	8.30	9.00	9.39	10.87
	6H	12.23	12.56	13.35	13.69	15.16	8.43	8.75	9.54	9.88	11.36
	8H	12.45	12.73	13.57	13.85	15.34	8.62	8.90	9.74	10.02	11.51
	12H	12.59	12.84	13.71	13.94	15.48	8.74	8.99	9.86	10.10	11.63
12H	4H	11.62	11.97	12.73	13.07	14.55	7.91	8.27	9.02	9.37	10.85
	6H	12.21	12.49	13.33	13.61	15.10	8.48	8.76	9.60	9.87	11.37
	8H	12.43	12.68	13.55	13.78	15.32	8.69	8.94	9.81	10.04	11.58