

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P928016

Luminaire Tested: DFN2DIP-HX4F0-080D110US850-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P928016
REPORT IS A COMBINATION OF REPORTS P900953 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-080D110US850-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 20860.3 lumens
Efficiency: N/A
Efficacy: 127.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 163.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P928016

CATALOG NUMBER: DFN2DIP-HX4F0-080D110US850-FLLONL

Luminous Intensity Polar Plot

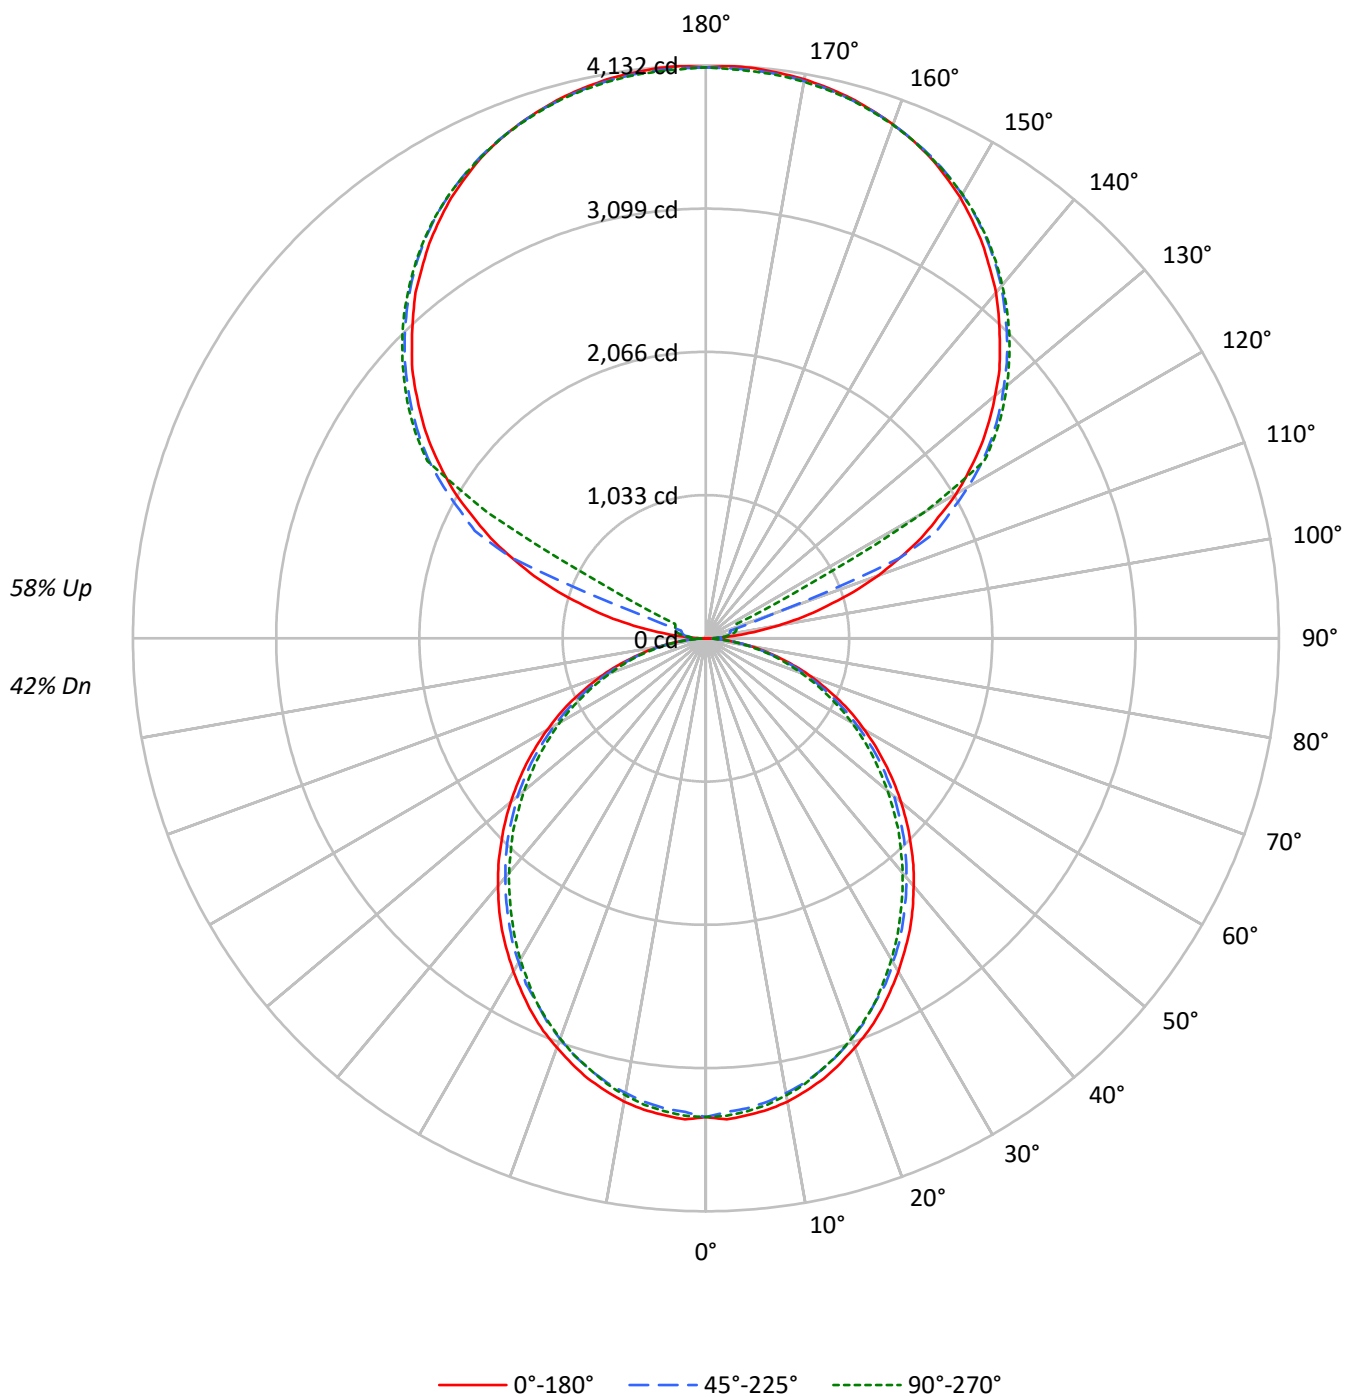

TEST NUMBER: P928016

CATALOG NUMBER: DFN2DIP-HX4F0-080D110US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49
1	96	92	88	84	88	84	81	78	69	67	65	56	54	53	43	42	41
2	87	80	74	69	80	73	68	64	61	57	54	49	46	44	38	36	35
3	80	70	63	57	72	65	58	53	53	49	45	43	40	37	34	31	30
4	73	62	54	49	66	57	50	45	47	42	38	38	35	32	30	28	25
5	67	55	47	41	61	51	44	39	42	37	33	35	31	28	27	24	22
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20
7	57	45	37	31	52	41	34	29	35	29	25	28	24	21	22	20	17
8	53	41	33	28	48	37	31	26	32	26	22	26	22	19	21	18	16
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14
10	46	34	27	22	42	31	25	21	27	22	18	22	18	15	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2567	2567	2567
5°	2571	2531	2548
10°	2551	2498	2514
15°	2513	2457	2460
20°	2463	2400	2405
25°	2413	2332	2341
30°	2350	2268	2260
35°	2290	2194	2175
40°	2217	2118	2093
45°	2143	2043	2010
50°	2063	1963	1913
55°	1979	1871	1824
60°	1885	1762	1723
65°	1782	1650	1603
70°	1650	1512	1474
75°	1468	1348	1355
80°	1249	1138	1127
85°	907	775	749

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2143 cd/sqm

TEST NUMBER: P928016

CATALOG NUMBER: DFN2DIP-HX4F0-080D110US850-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	324.9	1.6
10°-20°	914.2	4.4
20°-30°	1343.5	6.4
30°-40°	1560.4	7.5
40°-50°	1558.4	7.5
50°-60°	1358.9	6.5
60°-70°	1004.5	4.8
70°-80°	568.4	2.7
80°-90°	157.3	0.8
90°-100°	135.7	0.7
100°-110°	506.1	2.4
110°-120°	1342.2	6.4
120°-130°	2226.1	10.7
130°-140°	2364.7	11.3
140°-150°	2197.7	10.5
150°-160°	1766.9	8.5
160°-170°	1138.5	5.5
170°-180°	391.9	1.9
0°-30°	2582.6	12.4
0°-40°	4143.0	19.9
0°-60°	7060.4	33.8
0°-90°	8790.5	42.1
90°-120°	1984.0	9.5
90°-150°	8772.5	42.1
90°-180°	12070.0	57.9
0°-180°	20860.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3452	3452	3452	3452	3452	
5°	3452	3439	3402	3429	3423	328
15°	3286	3267	3223	3237	3220	926
25°	2974	2948	2892	2898	2892	1369
35°	2566	2533	2480	2460	2443	1602
45°	2088	2065	2015	1979	1965	1612
55°	1580	1560	1520	1481	1464	1413
65°	1066	1046	1012	983	966	1054
75°	558	551	534	515	521	595
85°	136	133	130	119	116	152
90°	3	36	59	75	80	19
95°	194	95	116	131	128	229
105°	906	995	182	214	226	968
115°	1713	1763	1838	459	244	1686
125°	2422	2461	2517	2538	2547	2160
135°	2997	3045	3071	3101	3095	2315
145°	3477	3474	3524	3545	3530	2174
155°	3828	3801	3837	3855	3831	1764
165°	4034	4016	4025	4046	4025	1140
175°	4126	4105	4111	4132	4102	393
180°	4117	4117	4117	4117	4117	

TEST NUMBER: P928016

CATALOG NUMBER: DFN2DIP-HX4F0-080D110US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3452.1	3452.1	3452.1	3452.1	3452.1
2.5°	3472.2	3455.6	3419.0	3452.1	3445.8
5°	3452.1	3439.1	3402.5	3428.9	3422.6
7.5°	3428.9	3409.2	3372.6	3399.3	3392.7
10°	3392.7	3369.4	3329.6	3355.9	3346.2
12.5°	3342.6	3322.9	3283.1	3299.6	3293.0
15°	3286.3	3266.6	3223.2	3236.6	3220.1
17.5°	3216.5	3196.8	3153.4	3170.1	3153.4
20°	3140.1	3120.4	3073.9	3083.8	3070.7
22.5°	3064.1	3034.1	2990.8	2990.8	2984.1
25°	2974.2	2947.8	2891.5	2897.8	2891.5
27.5°	2874.5	2851.3	2808.3	2798.5	2781.9
30°	2775.3	2748.4	2698.9	2689.0	2675.6
32.5°	2668.9	2649.2	2595.9	2575.9	2562.6
35°	2566.0	2533.0	2479.7	2459.7	2443.1
37.5°	2449.8	2419.8	2366.7	2343.4	2326.9
40°	2330.5	2303.6	2250.5	2220.9	2207.5
42.5°	2214.2	2187.4	2134.6	2101.1	2081.5
45°	2088.1	2064.8	2014.8	1978.6	1965.3
47.5°	1965.3	1942.0	1888.7	1852.1	1832.4
50°	1835.6	1819.1	1772.5	1726.0	1709.5
52.5°	1709.5	1686.2	1643.3	1606.7	1583.4
55°	1580.2	1560.1	1520.4	1480.6	1464.0
57.5°	1450.7	1434.2	1390.8	1351.0	1337.6
60°	1321.0	1308.1	1261.5	1224.9	1215.0
62.5°	1194.9	1171.8	1138.6	1105.6	1092.1
65°	1065.7	1045.7	1012.5	982.6	966.0
67.5°	932.9	916.0	886.4	863.2	849.8
70°	810.0	796.6	766.8	743.5	730.4
72.5°	683.9	670.6	654.0	630.8	620.9
75°	557.5	551.2	534.3	514.6	521.2
77.5°	444.8	431.4	424.7	414.9	405.0
80°	332.1	328.6	321.9	312.1	305.3
82.5°	225.8	225.8	222.6	209.2	209.2
85°	136.0	132.7	129.6	119.4	116.2
87.5°	59.9	53.2	46.5	36.6	33.2
90°	2.9	35.7	59.4	74.6	80.3
92.5°	74.6	62.7	71.4	77.5	80.3
95°	193.5	95.2	116.0	131.2	128.1
97.5°	348.4	104.4	151.7	160.9	163.8
100°	527.4	119.2	169.8	193.5	199.5
102.5°	723.7	718.1	175.8	208.4	217.6
105°	905.6	995.1	181.9	214.4	226.5
107.5°	1117.2	1191.4	187.9	220.4	232.4
110°	1319.8	1382.1	521.5	223.6	235.2

TEST NUMBER: P928016

CATALOG NUMBER: DFN2DIP-HX4F0-080D110US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1510.6	1563.9	1513.3	229.2	238.4
115°	1712.9	1763.4	1838.2	458.8	244.4
117.5°	1888.7	1948.2	1999.1	1572.8	792.4
120°	2085.4	2129.9	2183.7	2219.4	1817.2
122.5°	2252.0	2299.7	2359.5	2377.3	2380.5
125°	2421.8	2460.8	2517.3	2538.2	2547.0
127.5°	2576.8	2618.5	2663.4	2693.1	2696.0
130°	2722.8	2770.6	2803.1	2836.0	2833.3
132.5°	2871.8	2910.7	2943.3	2970.1	2967.4
135°	2997.1	3044.8	3071.3	3101.4	3095.3
137.5°	3127.9	3163.6	3193.7	3223.4	3214.5
140°	3256.0	3280.0	3312.6	3339.4	3324.6
142.5°	3363.5	3384.3	3422.9	3446.7	3431.8
145°	3476.7	3473.5	3524.1	3545.0	3530.2
147.5°	3574.8	3565.9	3616.4	3631.3	3619.7
150°	3670.2	3649.4	3697.1	3714.8	3700.0
152.5°	3750.5	3726.8	3771.4	3789.5	3768.6
155°	3828.0	3801.4	3837.1	3854.9	3831.2
157.5°	3890.6	3866.9	3893.8	3914.7	3890.6
160°	3944.4	3926.3	3944.4	3962.0	3941.2
162.5°	3991.7	3974.1	3989.0	4009.8	3983.0
165°	4033.5	4015.8	4024.7	4045.5	4024.7
167.5°	4066.4	4048.4	4057.6	4078.5	4051.6
170°	4093.3	4075.2	4081.2	4102.2	4075.2
172.5°	4111.0	4093.3	4099.3	4120.2	4093.3
175°	4125.8	4105.0	4111.0	4131.9	4102.2
177.5°	4131.9	4111.0	4114.2	4135.0	4108.2
180°	4117.1	4117.1	4117.1	4117.1	4117.1

TEST NUMBER: P928016

CATALOG NUMBER: DFN2DIP-HX4F0-080D110US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.78	10.57	10.80	11.60	12.98	9.34	10.14	10.37	11.17	12.55
	3H	11.43	12.14	12.46	13.18	14.58	10.96	11.67	11.99	12.71	14.11
	4H	12.02	12.69	13.06	13.73	15.14	11.54	12.22	12.59	13.26	14.67
	6H	12.41	13.04	13.47	14.08	15.50	11.94	12.56	12.99	13.61	15.02
	8H	12.52	13.11	13.58	14.17	15.58	12.04	12.63	13.10	13.70	15.11
	12H	12.56	13.13	13.63	14.18	15.62	12.08	12.64	13.15	13.70	15.14
4H	2H	10.23	10.90	11.28	11.95	13.35	9.88	10.56	10.94	11.60	13.01
	3H	12.09	12.65	13.15	13.72	15.14	11.70	12.26	12.76	13.33	14.75
	4H	12.80	13.32	13.87	14.38	15.82	12.40	12.91	13.46	13.97	15.42
	6H	13.32	13.76	14.39	14.84	16.28	12.91	13.35	13.98	14.43	15.87
	8H	13.46	13.88	14.54	14.95	16.41	13.05	13.47	14.13	14.54	15.99
	12H	13.53	13.91	14.63	15.00	16.46	13.11	13.49	14.20	14.58	16.03
8H	4H	12.99	13.41	14.07	14.49	15.94	12.63	13.05	13.71	14.12	15.58
	6H	13.62	13.97	14.72	15.09	16.53	13.26	13.60	14.36	14.72	16.17
	8H	13.85	14.15	14.95	15.25	16.71	13.48	13.78	14.58	14.88	16.35
	12H	13.97	14.24	15.08	15.34	16.84	13.59	13.85	14.70	14.95	16.46
12H	4H	12.98	13.35	14.07	14.44	15.90	12.63	13.00	13.72	14.09	15.55
	6H	13.65	13.96	14.76	15.06	16.52	13.30	13.60	14.41	14.70	16.17
	8H	13.89	14.16	15.00	15.25	16.76	13.54	13.80	14.64	14.90	16.40