

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P928020

Luminaire Tested: DFN2DIP-HX4F0-080D120US850-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P928020
REPORT IS A COMBINATION OF REPORTS P900971 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-080D120US850-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 21958.2 lumens
Efficiency: N/A
Efficacy: 127.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 172.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P928020
CATALOG NUMBER: DFN2DIP-HX4F0-080D120US850-FLLONL

Luminous Intensity Polar Plot

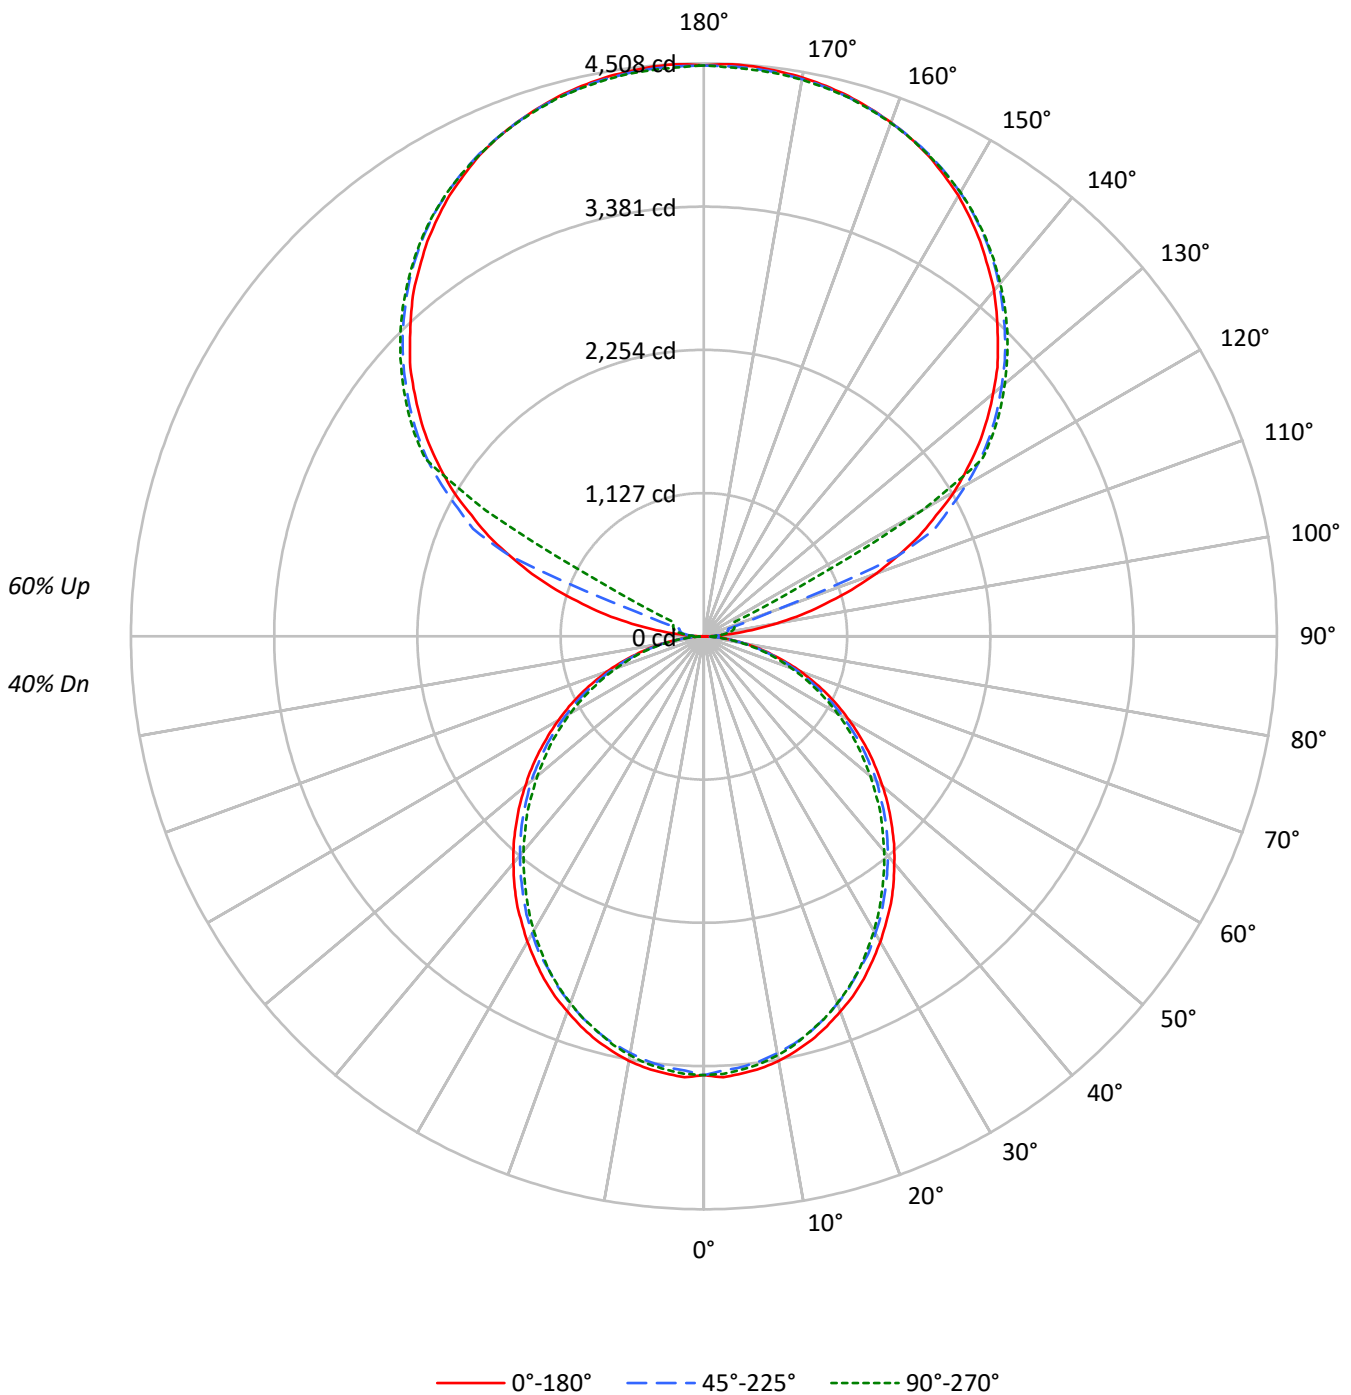



TEST NUMBER: P928020

CATALOG NUMBER: DFN2DIP-HX4F0-080D120US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	47	47	47	40
1	96	91	87	84	87	83	80	77	68	66	64	54	53	51	41	41	40	40	40	40	34
2	87	80	74	69	79	73	68	63	60	56	53	48	45	43	37	35	33	33	33	33	28
3	79	70	63	57	72	64	58	53	53	48	44	42	39	36	32	30	28	28	28	28	24
4	73	62	54	48	66	57	50	45	47	42	38	37	34	31	29	26	24	24	24	24	21
5	67	55	47	41	60	50	44	38	42	37	33	34	30	27	26	23	21	21	21	21	18
6	61	49	41	36	56	45	38	33	38	32	28	30	26	23	24	21	19	19	19	19	16
7	57	45	37	31	51	41	34	29	34	29	25	28	24	21	22	19	17	17	17	17	14
8	52	40	33	27	48	37	30	26	31	26	22	25	21	18	20	17	15	15	15	15	12
9	49	37	29	24	44	34	27	23	28	23	20	23	19	17	18	15	13	13	13	13	11
10	46	34	27	22	41	31	25	20	26	21	18	21	18	15	17	14	12	12	12	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2567	2567	2567
5°	2571	2531	2548
10°	2551	2498	2514
15°	2513	2457	2460
20°	2463	2400	2405
25°	2413	2332	2341
30°	2350	2268	2260
35°	2290	2194	2175
40°	2217	2118	2093
45°	2143	2043	2010
50°	2063	1963	1913
55°	1979	1871	1824
60°	1885	1762	1723
65°	1782	1650	1603
70°	1650	1512	1474
75°	1468	1348	1355
80°	1249	1138	1127
85°	907	775	749

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 2306 cd/sqm



TEST NUMBER: P928020

CATALOG NUMBER: DFN2DIP-HX4F0-080D120US850-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	324.9	1.5
10°-20°	914.2	4.2
20°-30°	1343.5	6.1
30°-40°	1560.4	7.1
40°-50°	1558.4	7.1
50°-60°	1358.9	6.2
60°-70°	1004.5	4.6
70°-80°	568.4	2.6
80°-90°	157.9	0.7
90°-100°	148.1	0.7
100°-110°	552.1	2.5
110°-120°	1464.2	6.7
120°-130°	2428.5	11.1
130°-140°	2579.6	11.7
140°-150°	2397.5	10.9
150°-160°	1927.5	8.8
160°-170°	1242.0	5.7
170°-180°	427.5	1.9
0°-30°	2582.6	11.8
0°-40°	4143.0	18.9
0°-60°	7060.4	32.2
0°-90°	8791.2	40.0
90°-120°	2164.4	9.9
90°-150°	9570.0	43.6
90°-180°	13167.0	60.0
0°-180°	21958.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3452	3452	3452	3452	3452	
5°	3452	3439	3402	3429	3423	328
15°	3286	3267	3223	3237	3220	926
25°	2974	2948	2892	2898	2892	1369
35°	2566	2533	2480	2460	2443	1602
45°	2088	2065	2015	1979	1965	1612
55°	1580	1560	1520	1481	1464	1413
65°	1066	1046	1012	983	966	1054
75°	558	551	534	515	521	595
85°	136	133	130	119	116	152
90°	3	39	65	81	88	20
95°	211	104	126	143	140	250
105°	988	1086	198	234	247	1056
115°	1869	1924	2005	500	267	1840
125°	2642	2684	2746	2769	2779	2356
135°	3269	3322	3350	3383	3377	2526
145°	3793	3789	3844	3867	3851	2372
155°	4176	4147	4186	4205	4180	1924
165°	4400	4381	4390	4413	4390	1243
175°	4501	4478	4485	4508	4475	428
180°	4491	4491	4491	4491	4491	



TEST NUMBER: P928020

CATALOG NUMBER: DFN2DIP-HX4F0-080D120US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3452.1	3452.1	3452.1	3452.1	3452.1
2.5°	3472.2	3455.6	3419.0	3452.1	3445.8
5°	3452.1	3439.1	3402.5	3428.9	3422.6
7.5°	3428.9	3409.2	3372.6	3399.3	3392.7
10°	3392.7	3369.4	3329.6	3355.9	3346.2
12.5°	3342.6	3322.9	3283.1	3299.6	3293.0
15°	3286.3	3266.6	3223.2	3236.6	3220.1
17.5°	3216.5	3196.8	3153.4	3170.1	3153.4
20°	3140.1	3120.4	3073.9	3083.8	3070.7
22.5°	3064.1	3034.1	2990.8	2990.8	2984.1
25°	2974.2	2947.8	2891.5	2897.8	2891.5
27.5°	2874.5	2851.3	2808.3	2798.5	2781.9
30°	2775.3	2748.4	2698.9	2689.0	2675.6
32.5°	2668.9	2649.2	2595.9	2575.9	2562.6
35°	2566.0	2533.0	2479.7	2459.7	2443.1
37.5°	2449.8	2419.8	2366.7	2343.4	2326.9
40°	2330.5	2303.6	2250.5	2220.9	2207.5
42.5°	2214.2	2187.4	2134.6	2101.1	2081.5
45°	2088.1	2064.8	2014.8	1978.6	1965.3
47.5°	1965.3	1942.0	1888.7	1852.1	1832.4
50°	1835.6	1819.1	1772.5	1726.0	1709.5
52.5°	1709.5	1686.2	1643.3	1606.7	1583.4
55°	1580.2	1560.1	1520.4	1480.6	1464.0
57.5°	1450.7	1434.2	1390.8	1351.0	1337.6
60°	1321.0	1308.1	1261.5	1224.9	1215.0
62.5°	1194.9	1171.8	1138.6	1105.6	1092.1
65°	1065.7	1045.7	1012.5	982.6	966.0
67.5°	932.9	916.0	886.4	863.2	849.8
70°	810.0	796.6	766.8	743.5	730.4
72.5°	683.9	670.6	654.0	630.8	620.9
75°	557.5	551.2	534.3	514.6	521.2
77.5°	444.8	431.4	424.7	414.9	405.0
80°	332.1	328.6	321.9	312.1	305.3
82.5°	225.8	225.8	222.6	209.2	209.2
85°	136.0	132.7	129.6	119.4	116.2
87.5°	59.9	53.2	46.5	36.6	33.2
90°	3.1	38.9	64.9	81.4	87.6
92.5°	81.4	68.3	78.0	84.5	87.6
95°	211.0	103.8	126.5	143.2	139.7
97.5°	380.2	113.9	165.6	175.6	178.7
100°	575.3	130.1	185.2	211.0	217.7
102.5°	789.6	783.4	191.7	227.3	237.3
105°	987.9	1085.6	198.4	233.9	247.0
107.5°	1218.7	1299.7	204.9	240.4	253.5
110°	1439.8	1507.8	568.8	243.9	256.6



TEST NUMBER: P928020

CATALOG NUMBER: DFN2DIP-HX4F0-080D120US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1647.9	1706.1	1651.0	250.1	260.1
115°	1868.6	1923.8	2005.2	500.5	266.7
117.5°	2060.4	2125.3	2180.8	1715.7	864.5
120°	2275.0	2323.6	2382.2	2421.3	1982.4
122.5°	2456.8	2508.9	2574.1	2593.4	2596.8
125°	2642.0	2684.4	2746.2	2769.0	2778.6
127.5°	2811.0	2856.6	2905.6	2938.0	2941.1
130°	2970.3	3022.5	3058.0	3093.9	3090.8
132.5°	3132.8	3175.3	3210.8	3240.2	3237.1
135°	3269.4	3321.6	3350.5	3383.3	3376.8
137.5°	3412.3	3451.2	3484.0	3516.4	3506.8
140°	3552.0	3578.2	3613.7	3643.1	3626.9
142.5°	3669.2	3692.1	3734.1	3760.0	3743.8
145°	3792.8	3789.3	3844.5	3867.3	3851.0
147.5°	3899.7	3890.0	3945.3	3961.5	3948.7
150°	4003.8	3981.1	4033.2	4052.5	4036.3
152.5°	4091.4	4065.6	4114.3	4133.9	4111.2
155°	4175.9	4147.0	4186.0	4205.3	4179.5
157.5°	4244.3	4218.4	4247.8	4270.5	4244.3
160°	4302.9	4283.3	4302.9	4322.2	4299.5
162.5°	4354.7	4335.4	4351.6	4374.3	4345.1
165°	4400.2	4380.9	4390.5	4413.4	4390.5
167.5°	4436.1	4416.4	4426.5	4449.2	4419.9
170°	4465.4	4445.8	4452.3	4475.0	4445.8
172.5°	4484.7	4465.4	4472.0	4494.8	4465.4
175°	4500.9	4478.1	4484.7	4507.5	4475.0
177.5°	4507.5	4484.7	4488.2	4511.0	4481.7
180°	4491.3	4491.3	4491.3	4491.3	4491.3



TEST NUMBER: P928020
 CATALOG NUMBER: DFN2DIP-HX4F0-080D120US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.55	10.33	10.59	11.37	12.78	9.12	9.90	10.16	10.94	12.35
	3H	11.21	11.90	12.25	12.96	14.38	10.73	11.43	11.78	12.48	13.91
	4H	11.79	12.45	12.85	13.51	14.94	11.32	11.98	12.38	13.03	14.47
	6H	12.19	12.80	13.26	13.85	15.30	11.71	12.32	12.78	13.38	14.82
	8H	12.29	12.87	13.36	13.94	15.38	11.81	12.39	12.89	13.47	14.91
	12H	12.34	12.89	13.41	13.95	15.42	11.85	12.40	12.93	13.47	14.94
4H	2H	10.00	10.66	11.07	11.72	13.15	9.66	10.32	10.72	11.37	12.81
	3H	11.86	12.41	12.94	13.50	14.94	11.47	12.02	12.54	13.10	14.55
	4H	12.57	13.08	13.65	14.15	15.62	12.17	12.67	13.25	13.75	15.22
	6H	13.09	13.52	14.17	14.62	16.08	12.68	13.11	13.76	14.21	15.67
	8H	13.23	13.64	14.32	14.73	16.21	12.82	13.23	13.91	14.32	15.79
	12H	13.30	13.67	14.41	14.77	16.26	12.88	13.25	13.99	14.35	15.83
8H	4H	12.76	13.17	13.85	14.26	15.74	12.40	12.81	13.49	13.90	15.38
	6H	13.39	13.73	14.51	14.86	16.33	13.03	13.37	14.14	14.50	15.97
	8H	13.61	13.91	14.73	15.02	16.52	13.25	13.54	14.36	14.65	16.15
	12H	13.74	14.00	14.86	15.11	16.64	13.36	13.62	14.48	14.73	16.26
12H	4H	12.75	13.11	13.85	14.22	15.70	12.39	12.76	13.50	13.86	15.35
	6H	13.42	13.72	14.54	14.83	16.32	13.07	13.37	14.19	14.48	15.97
	8H	13.66	13.92	14.78	15.03	16.56	13.30	13.56	14.43	14.67	16.20