

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911026

Luminaire Tested: DFN2DIP-HX4F0-120D100US850-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P911026  
REPORT IS A COMBINATION OF REPORTS P899423 AND P896188  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-HX4F0-120D100US850-FLLFLL  
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 22989.6 lumens  
Efficiency: N/A  
Efficacy: 125.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 183.9  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9954  
Total Harmonic Distortion (THDi): 0.076  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P911026  
CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLLFLL

### Luminous Intensity Polar Plot

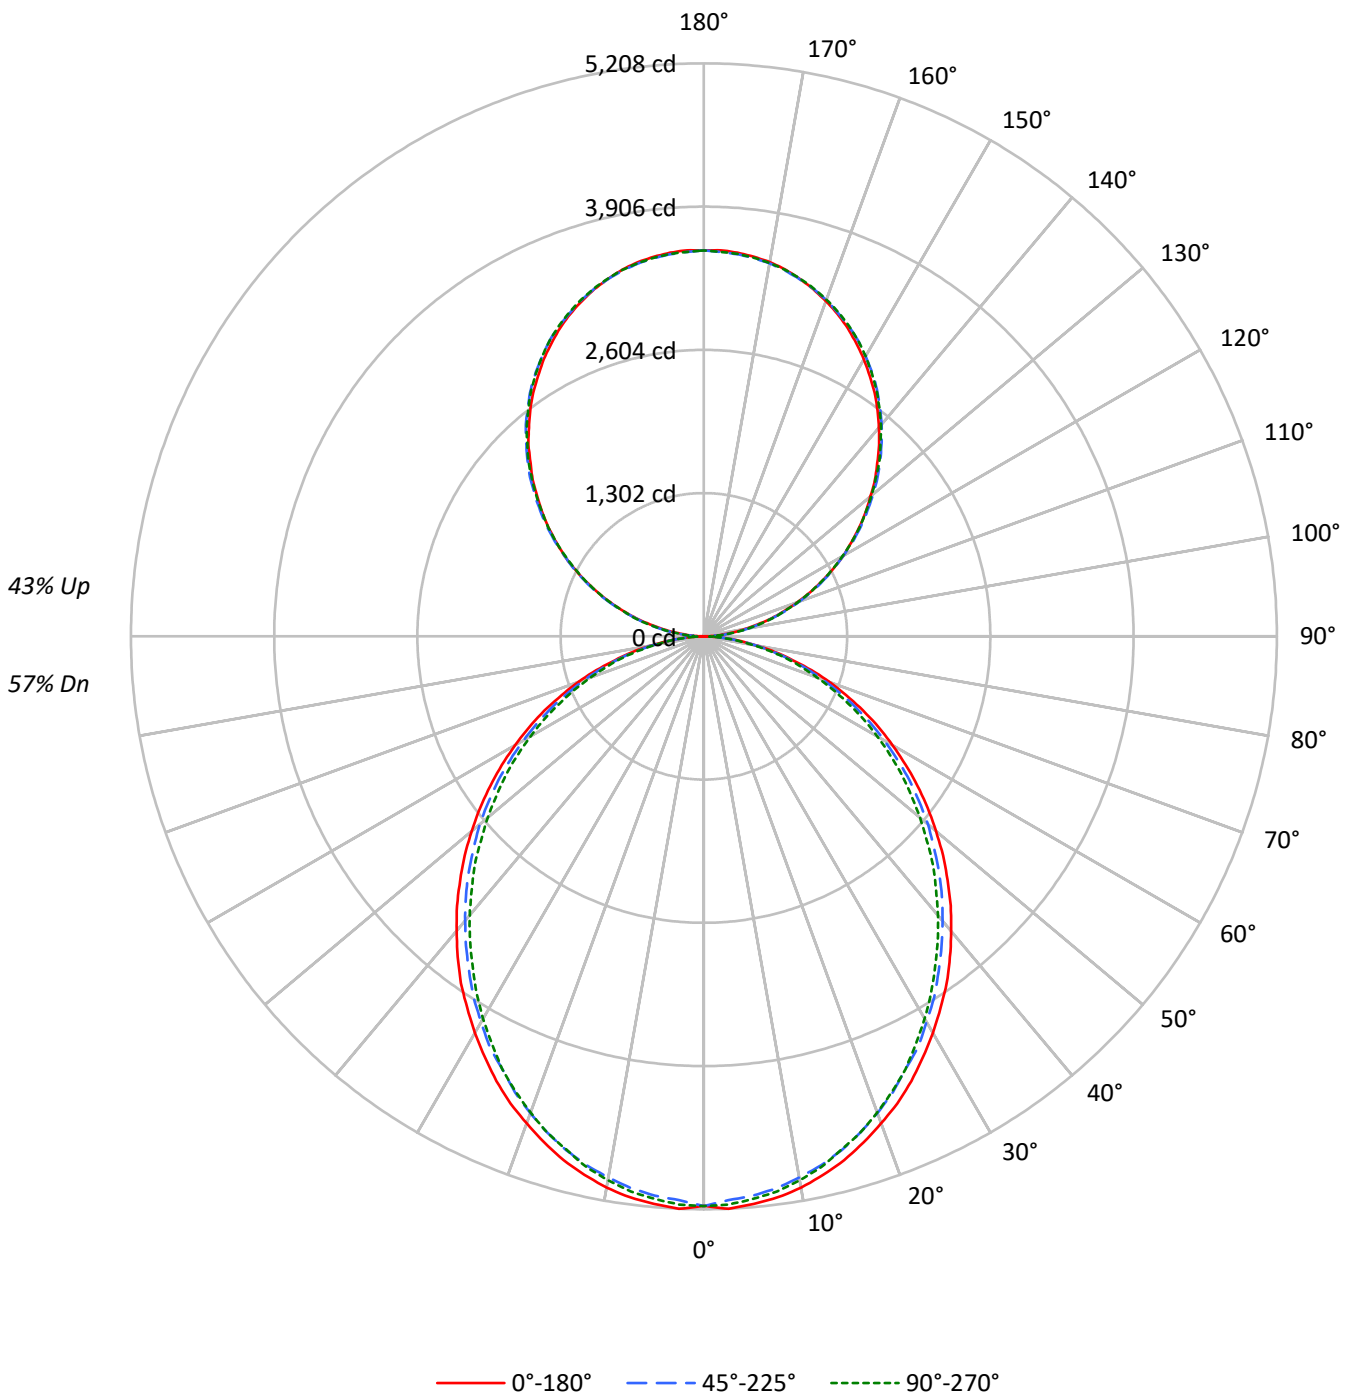



TEST NUMBER: P911026  
 CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	101	101	101	101	87	87	87	75	75	75	63	63	63	57	57	57	57
1	99	95	91	88	92	89	85	82	77	74	72	66	64	62	56	54	53	48	48	48	48
2	91	83	77	72	84	78	72	67	67	63	60	58	55	52	49	47	45	40	40	40	40
3	83	73	66	60	77	68	62	56	59	54	50	51	47	44	43	41	38	34	34	34	34
4	76	65	57	51	70	61	53	48	53	47	43	46	41	38	39	36	33	29	29	29	29
5	69	58	49	43	64	54	47	41	47	41	37	41	36	33	35	31	29	26	26	26	26
6	64	52	44	38	59	49	41	36	43	37	32	37	32	29	32	28	25	22	22	22	22
7	59	47	39	33	55	44	37	32	39	33	28	34	29	25	29	25	22	20	20	20	20
8	55	43	35	29	51	40	33	28	35	29	25	31	26	23	27	23	20	18	18	18	18
9	51	39	31	26	48	37	30	25	32	27	23	28	24	20	25	21	18	16	16	16	16
10	48	36	28	24	45	34	27	23	30	24	21	26	22	19	23	19	17	15	15	15	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3850	3850	3850
5°	3857	3797	3822
10°	3826	3746	3771
15°	3770	3685	3690
20°	3694	3600	3608
25°	3619	3498	3512
30°	3524	3403	3391
35°	3435	3291	3262
40°	3325	3177	3140
45°	3215	3064	3015
50°	3095	2945	2870
55°	2969	2807	2736
60°	2827	2643	2584
65°	2672	2474	2404
70°	2475	2268	2211
75°	2202	2021	2032
80°	1873	1707	1690
85°	1359	1163	1124

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3215 cd/sqm



TEST NUMBER: P911026

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	487.4	2.1
10°-20°	1371.3	6.0
20°-30°	2015.2	8.8
30°-40°	2340.6	10.2
40°-50°	2337.7	10.2
50°-60°	2038.4	8.9
60°-70°	1506.8	6.6
70°-80°	852.5	3.7
80°-90°	235.0	1.0
90°-100°	217.0	0.9
100°-110°	689.6	3.0
110°-120°	1180.1	5.1
120°-130°	1552.0	6.8
130°-140°	1742.1	7.6
140°-150°	1708.3	7.4
150°-160°	1433.0	6.2
160°-170°	950.4	4.1
170°-180°	332.2	1.4
0°-30°	3873.9	16.9
0°-40°	6214.5	27.0
0°-60°	10590.5	46.1
0°-90°	13184.9	57.4
90°-120°	2086.7	9.1
90°-150°	7089.1	30.8
90°-180°	9805.0	42.6
0°-180°	22989.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	5178	5178	5178	5178	5178	
5°	5178	5159	5104	5143	5134	492
15°	4929	4900	4835	4855	4830	1388
25°	4461	4422	4337	4347	4337	2053
35°	3849	3799	3720	3690	3665	2404
45°	3132	3097	3022	2968	2948	2417
55°	2370	2340	2280	2221	2196	2119
65°	1599	1568	1519	1474	1449	1581
75°	836	827	801	772	782	893
85°	204	199	194	179	174	227
90°	3	38	104	97	100	22
95°	154	184	189	189	184	172
105°	637	645	651	657	657	672
115°	1184	1201	1196	1193	1184	1171
125°	1722	1749	1740	1731	1728	1539
135°	2228	2261	2267	2264	2255	1722
145°	2705	2726	2743	2746	2734	1690
155°	3093	3101	3111	3126	3116	1424
165°	3365	3361	3361	3383	3368	949
175°	3501	3493	3486	3507	3489	333
180°	3507	3507	3507	3507	3507	



TEST NUMBER: P911026

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	5178.3	5178.3	5178.3	5178.3	5178.3
2.5°	5208.3	5183.5	5128.6	5178.3	5168.7
5°	5178.3	5158.6	5103.7	5143.3	5133.8
7.5°	5143.3	5113.7	5058.8	5099.0	5089.0
10°	5089.0	5054.0	4994.4	5034.0	5019.2
12.5°	5013.9	4984.3	4924.6	4949.5	4939.4
15°	4929.4	4899.8	4834.8	4854.9	4830.0
17.5°	4824.8	4795.2	4730.2	4755.1	4730.2
20°	4710.1	4680.5	4610.9	4625.6	4606.1
22.5°	4596.0	4551.1	4486.1	4486.1	4476.1
25°	4461.3	4421.7	4337.2	4346.7	4337.2
27.5°	4311.8	4277.0	4212.5	4197.7	4172.9
30°	4162.9	4122.7	4048.2	4033.4	4013.4
32.5°	4003.3	3973.8	3893.9	3863.9	3843.8
35°	3849.0	3799.4	3719.6	3689.5	3664.7
37.5°	3674.7	3629.9	3550.0	3515.2	3490.4
40°	3495.7	3455.5	3375.7	3331.3	3311.3
42.5°	3321.3	3281.2	3201.9	3151.8	3122.2
45°	3132.1	3097.3	3022.2	2967.9	2947.8
47.5°	2947.8	2912.9	2833.2	2778.3	2748.7
50°	2753.4	2728.6	2658.8	2589.1	2564.2
52.5°	2564.2	2529.4	2465.0	2410.0	2375.1
55°	2370.4	2340.3	2280.5	2220.9	2196.0
57.5°	2176.0	2151.1	2086.1	2026.5	2006.4
60°	1981.6	1962.0	1892.3	1837.4	1822.5
62.5°	1792.5	1757.5	1708.0	1658.3	1638.2
65°	1598.6	1568.5	1518.8	1473.9	1449.1
67.5°	1399.4	1374.1	1329.7	1294.9	1274.8
70°	1215.0	1194.9	1150.0	1115.2	1095.7
72.5°	1025.9	1005.9	981.0	946.2	931.3
75°	836.3	826.8	801.4	771.9	781.8
77.5°	667.2	647.1	637.1	622.3	607.5
80°	498.2	492.8	482.9	468.1	458.0
82.5°	338.6	338.6	333.9	313.8	313.8
85°	203.9	199.2	194.4	179.1	174.3
87.5°	89.8	79.7	69.8	54.9	49.7
90°	3.2	38.0	103.6	97.3	100.5
92.5°	65.5	88.8	92.0	95.2	95.2
95°	154.4	184.0	189.3	189.3	184.0
97.5°	257.0	284.5	296.1	296.1	296.1
100°	375.4	399.7	408.1	408.1	405.0
102.5°	500.2	518.1	529.8	532.9	529.8
105°	636.6	645.0	651.3	656.6	656.6
107.5°	771.9	784.6	784.6	786.7	771.9
110°	903.1	919.9	919.9	919.9	911.5



TEST NUMBER: P911026

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1044.7	1062.6	1059.5	1051.0	1044.7
115°	1184.3	1201.2	1195.9	1192.7	1184.3
117.5°	1322.8	1346.1	1331.2	1322.8	1314.3
120°	1462.3	1485.6	1462.3	1462.3	1452.9
122.5°	1589.2	1618.8	1604.1	1595.6	1589.2
125°	1722.5	1748.9	1740.5	1730.9	1727.8
127.5°	1852.6	1885.3	1873.7	1861.0	1852.6
130°	1974.1	2012.2	2007.0	2000.5	1989.0
132.5°	2110.5	2140.1	2142.3	2127.5	2119.0
135°	2227.9	2260.7	2267.0	2263.9	2255.4
137.5°	2359.1	2385.5	2390.8	2388.7	2375.9
140°	2474.3	2500.7	2515.5	2515.5	2503.9
142.5°	2592.7	2619.1	2627.6	2630.8	2619.1
145°	2704.7	2725.9	2742.9	2746.0	2734.4
147.5°	2805.2	2831.7	2844.4	2849.7	2838.0
150°	2908.9	2926.9	2938.5	2947.9	2938.5
152.5°	3000.8	3018.8	3033.7	3045.3	3033.7
155°	3092.9	3101.3	3110.9	3125.6	3116.1
157.5°	3172.2	3178.5	3183.8	3204.9	3190.1
160°	3243.0	3249.4	3252.5	3270.4	3257.8
162.5°	3308.6	3308.6	3311.7	3331.8	3317.0
165°	3364.6	3361.4	3361.4	3382.6	3367.8
167.5°	3415.4	3405.8	3405.8	3427.0	3412.2
170°	3453.4	3445.0	3441.8	3463.0	3445.0
172.5°	3479.8	3471.4	3468.2	3489.4	3471.4
175°	3501.0	3492.6	3486.3	3507.3	3489.4
177.5°	3512.6	3504.2	3497.8	3515.8	3497.8
180°	3507.3	3507.3	3507.3	3507.3	3507.3



TEST NUMBER: P911026  
 CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.61	13.54	13.50	14.45	15.61	12.18	13.11	13.07	14.02	15.18
	3H	14.27	15.11	15.18	16.03	17.22	13.80	14.64	14.70	15.56	16.75
	4H	14.87	15.66	15.78	16.58	17.78	14.39	15.18	15.31	16.11	17.31
	6H	15.27	16.00	16.20	16.93	18.14	14.79	15.52	15.72	16.46	17.67
	8H	15.38	16.07	16.31	17.02	18.23	14.90	15.60	15.84	16.55	17.75
	12H	15.43	16.09	16.37	17.03	18.27	14.95	15.61	15.89	16.55	17.79
4H	2H	13.08	13.87	14.00	14.80	15.99	12.73	13.52	13.66	14.45	15.65
	3H	14.95	15.61	15.89	16.57	17.78	14.56	15.22	15.49	16.18	17.39
	4H	15.67	16.27	16.61	17.22	18.46	15.26	15.87	16.21	16.82	18.05
	6H	16.19	16.71	17.15	17.69	18.92	15.78	16.30	16.74	17.28	18.51
	8H	16.34	16.83	17.30	17.80	19.05	15.93	16.42	16.89	17.38	18.63
	12H	16.42	16.86	17.40	17.84	19.10	16.00	16.44	16.98	17.42	18.68
8H	4H	15.87	16.36	16.83	17.33	18.58	15.51	16.00	16.47	16.97	18.22
	6H	16.51	16.91	17.49	17.92	19.17	16.15	16.55	17.13	17.56	18.81
	8H	16.73	17.09	17.73	18.09	19.35	16.36	16.72	17.36	17.72	18.98
	12H	16.87	17.18	17.86	18.17	19.49	16.48	16.79	17.48	17.79	19.10
12H	4H	15.86	16.30	16.84	17.29	18.54	15.51	15.95	16.49	16.93	18.19
	6H	16.54	16.90	17.53	17.89	19.16	16.19	16.54	17.18	17.54	18.81
	8H	16.79	17.10	17.78	18.09	19.41	16.43	16.74	17.43	17.73	19.05