

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P928156

Luminaire Tested: DFN2DIP-HX4F0-120D100US850-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P928156
REPORT IS A COMBINATION OF REPORTS P900943 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-120D100US850-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 24154.0 lumens
Efficiency: N/A
Efficacy: 119.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 202.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P928156

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLLONL

Luminous Intensity Polar Plot

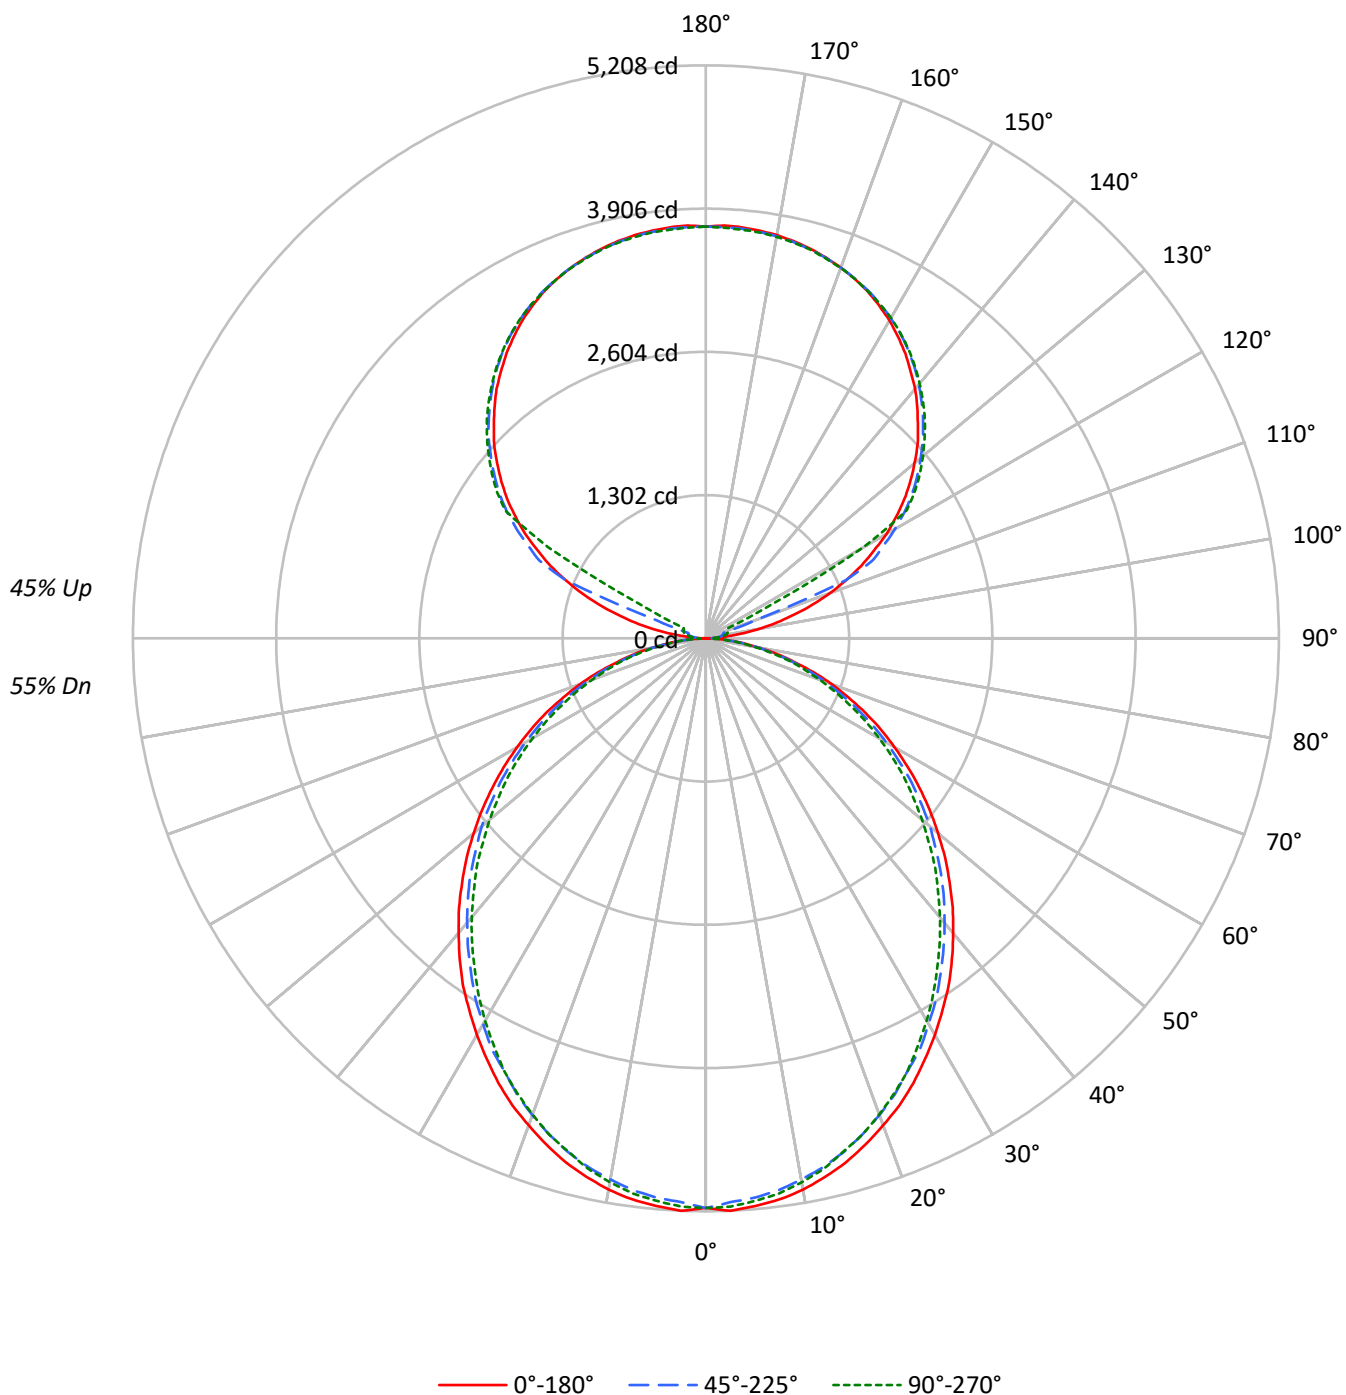

TEST NUMBER: P928156

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60
1	99	94	91	87	92	88	84	81	75	73	71	64	62	60	53	52	51
2	90	82	76	71	83	77	71	67	66	62	58	56	53	51	47	45	43
3	82	73	65	59	76	68	61	56	58	53	49	50	46	43	42	39	37
4	75	64	56	50	69	60	53	47	52	46	42	44	40	37	37	34	32
5	69	57	49	43	64	53	46	41	46	41	36	40	35	32	34	30	27
6	64	51	43	37	59	48	41	35	42	36	32	36	31	28	30	27	24
7	59	46	38	33	54	43	36	31	38	32	28	33	28	25	28	24	22
8	55	42	34	29	51	40	33	28	35	29	25	30	25	22	26	22	19
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	17
10	48	35	28	23	44	33	27	22	29	24	20	25	21	18	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3850	3850	3850
5°	3857	3797	3822
10°	3826	3746	3771
15°	3770	3685	3690
20°	3694	3600	3608
25°	3619	3498	3512
30°	3524	3403	3391
35°	3435	3291	3262
40°	3325	3177	3140
45°	3215	3064	3015
50°	3095	2945	2870
55°	2969	2807	2736
60°	2827	2643	2584
65°	2672	2474	2404
70°	2475	2268	2211
75°	2202	2021	2032
80°	1873	1707	1690
85°	1359	1163	1124

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3215 cd/sqm

TEST NUMBER: P928156

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	487.4	2.0
10°-20°	1371.3	5.7
20°-30°	2015.2	8.3
30°-40°	2340.6	9.7
40°-50°	2337.7	9.7
50°-60°	2038.4	8.4
60°-70°	1506.8	6.2
70°-80°	852.5	3.5
80°-90°	231.6	1.0
90°-100°	123.4	0.5
100°-110°	460.1	1.9
110°-120°	1220.2	5.1
120°-130°	2023.8	8.4
130°-140°	2149.7	8.9
140°-150°	1997.9	8.3
150°-160°	1606.3	6.7
160°-170°	1035.0	4.3
170°-180°	356.2	1.5
0°-30°	3873.9	16.0
0°-40°	6214.5	25.7
0°-60°	10590.5	43.8
0°-90°	13181.5	54.6
90°-120°	1803.7	7.5
90°-150°	7975.0	33.0
90°-180°	10973.0	45.4
0°-180°	24154.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5178	5178	5178	5178	5178	
5°	5178	5159	5104	5143	5134	492
15°	4929	4900	4835	4855	4830	1388
25°	4461	4422	4337	4347	4337	2053
35°	3849	3799	3720	3690	3665	2404
45°	3132	3097	3022	2968	2948	2417
55°	2370	2340	2280	2221	2196	2119
65°	1599	1568	1519	1474	1449	1581
75°	836	827	801	772	782	893
85°	204	199	194	179	174	227
90°	3	32	54	68	73	22
95°	176	86	106	119	116	208
105°	823	905	165	195	206	880
115°	1557	1603	1671	417	222	1533
125°	2202	2237	2288	2308	2316	1964
135°	2725	2768	2792	2819	2814	2105
145°	3161	3158	3204	3223	3209	1977
155°	3480	3456	3488	3504	3483	1604
165°	3667	3651	3659	3678	3659	1036
175°	3751	3732	3737	3756	3729	357
180°	3743	3743	3743	3743	3743	

TEST NUMBER: P928156

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5178.3	5178.3	5178.3	5178.3	5178.3
2.5°	5208.3	5183.5	5128.6	5178.3	5168.7
5°	5178.3	5158.6	5103.7	5143.3	5133.8
7.5°	5143.3	5113.7	5058.8	5099.0	5089.0
10°	5089.0	5054.0	4994.4	5034.0	5019.2
12.5°	5013.9	4984.3	4924.6	4949.5	4939.4
15°	4929.4	4899.8	4834.8	4854.9	4830.0
17.5°	4824.8	4795.2	4730.2	4755.1	4730.2
20°	4710.1	4680.5	4610.9	4625.6	4606.1
22.5°	4596.0	4551.1	4486.1	4486.1	4476.1
25°	4461.3	4421.7	4337.2	4346.7	4337.2
27.5°	4311.8	4277.0	4212.5	4197.7	4172.9
30°	4162.9	4122.7	4048.2	4033.4	4013.4
32.5°	4003.3	3973.8	3893.9	3863.9	3843.8
35°	3849.0	3799.4	3719.6	3689.5	3664.7
37.5°	3674.7	3629.9	3550.0	3515.2	3490.4
40°	3495.7	3455.5	3375.7	3331.3	3311.3
42.5°	3321.3	3281.2	3201.9	3151.8	3122.2
45°	3132.1	3097.3	3022.2	2967.9	2947.8
47.5°	2947.8	2912.9	2833.2	2778.3	2748.7
50°	2753.4	2728.6	2658.8	2589.1	2564.2
52.5°	2564.2	2529.4	2465.0	2410.0	2375.1
55°	2370.4	2340.3	2280.5	2220.9	2196.0
57.5°	2176.0	2151.1	2086.1	2026.5	2006.4
60°	1981.6	1962.0	1892.3	1837.4	1822.5
62.5°	1792.5	1757.5	1708.0	1658.3	1638.2
65°	1598.6	1568.5	1518.8	1473.9	1449.1
67.5°	1399.4	1374.1	1329.7	1294.9	1274.8
70°	1215.0	1194.9	1150.0	1115.2	1095.7
72.5°	1025.9	1005.9	981.0	946.2	931.3
75°	836.3	826.8	801.4	771.9	781.8
77.5°	667.2	647.1	637.1	622.3	607.5
80°	498.2	492.8	482.9	468.1	458.0
82.5°	338.6	338.6	333.9	313.8	313.8
85°	203.9	199.2	194.4	179.1	174.3
87.5°	89.8	79.7	69.8	54.9	49.7
90°	2.6	32.5	54.0	67.9	73.0
92.5°	67.9	56.9	65.0	70.4	73.0
95°	175.9	86.5	105.5	119.3	116.4
97.5°	316.7	94.8	138.0	146.3	148.9
100°	479.5	108.3	154.4	175.9	181.4
102.5°	658.0	652.9	159.8	189.4	197.7
105°	823.3	904.6	165.4	194.9	205.8
107.5°	1015.6	1083.2	170.8	200.4	211.3
110°	1199.8	1256.5	474.0	203.3	213.8

TEST NUMBER: P928156

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1373.2	1421.7	1375.8	208.4	216.8
115°	1557.1	1603.2	1671.0	417.1	222.2
117.5°	1717.0	1771.1	1817.3	1429.8	720.4
120°	1895.8	1936.3	1985.2	2017.7	1652.1
122.5°	2047.3	2090.7	2145.0	2161.1	2164.0
125°	2201.7	2237.1	2288.5	2307.5	2315.5
127.5°	2342.5	2380.5	2421.3	2448.3	2450.9
130°	2475.3	2518.8	2548.4	2578.2	2575.7
132.5°	2610.7	2646.1	2675.7	2700.1	2697.5
135°	2724.6	2768.0	2792.1	2819.4	2814.0
137.5°	2843.6	2876.1	2903.4	2930.4	2922.3
140°	2959.9	2981.9	3011.4	3035.9	3022.4
142.5°	3057.7	3076.7	3111.7	3133.3	3119.8
145°	3160.6	3157.8	3203.8	3222.8	3209.2
147.5°	3249.7	3241.7	3287.6	3301.2	3290.6
150°	3336.5	3317.6	3361.0	3377.1	3363.6
152.5°	3409.5	3388.0	3428.6	3444.9	3425.9
155°	3480.0	3455.9	3488.4	3504.4	3482.9
157.5°	3536.9	3515.4	3539.8	3558.8	3536.9
160°	3585.8	3569.4	3585.8	3601.9	3583.0
162.5°	3628.9	3612.8	3626.3	3645.3	3620.9
165°	3666.8	3650.7	3658.8	3677.8	3658.8
167.5°	3696.7	3680.3	3688.8	3707.7	3683.2
170°	3721.1	3704.8	3710.3	3729.2	3704.8
172.5°	3737.2	3721.1	3726.7	3745.6	3721.1
175°	3750.7	3731.8	3737.2	3756.3	3729.2
177.5°	3756.3	3737.2	3740.2	3759.2	3734.7
180°	3742.8	3742.8	3742.8	3742.8	3742.8

TEST NUMBER: P928156

CATALOG NUMBER: DFN2DIP-HX4F0-120D100US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.37	13.27	13.29	14.21	15.41	11.94	12.84	12.85	13.78	14.98
	3H	14.03	14.84	14.96	15.79	17.02	13.56	14.37	14.49	15.32	16.54
	4H	14.62	15.39	15.57	16.34	17.58	14.15	14.92	15.09	15.87	17.10
	6H	15.03	15.73	15.98	16.69	17.94	14.55	15.26	15.51	16.21	17.46
	8H	15.13	15.81	16.09	16.78	18.03	14.66	15.33	15.62	16.30	17.55
	12H	15.18	15.82	16.15	16.79	18.06	14.70	15.34	15.67	16.31	17.58
4H	2H	12.84	13.60	13.79	14.55	15.79	12.49	13.26	13.44	14.21	15.45
	3H	14.71	15.35	15.67	16.33	17.58	14.31	14.96	15.27	15.93	17.19
	4H	15.42	16.01	16.39	16.98	18.26	15.02	15.60	15.99	16.58	17.85
	6H	15.94	16.45	16.92	17.44	18.72	15.53	16.04	16.51	17.04	18.31
	8H	16.09	16.57	17.08	17.56	18.85	15.68	16.15	16.66	17.14	18.43
	12H	16.17	16.60	17.17	17.60	18.90	15.75	16.17	16.75	17.18	18.47
8H	4H	15.63	16.10	16.61	17.09	18.38	15.26	15.74	16.25	16.73	18.02
	6H	16.26	16.65	17.27	17.68	18.97	15.90	16.29	16.90	17.32	18.61
	8H	16.48	16.83	17.50	17.85	19.15	16.11	16.46	17.13	17.48	18.78
	12H	16.62	16.92	17.64	17.93	19.28	16.23	16.53	17.25	17.55	18.90
12H	4H	15.61	16.04	16.61	17.05	18.34	15.26	15.69	16.26	16.69	17.99
	6H	16.29	16.63	17.31	17.65	18.96	15.94	16.28	16.95	17.30	18.61
	8H	16.54	16.84	17.56	17.85	19.20	16.18	16.48	17.20	17.49	18.85

END OF REPORT