

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913599

Luminaire Tested: DFN2DIP-HX4F0-040D040US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913599
REPORT IS A COMBINATION OF REPORTS P899300 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-040D040US927-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5497.7 lumens
Efficiency: N/A
Efficacy: 96.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 57
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913599
CATALOG NUMBER: DFN2DIP-HX4F0-040D040US927-RLLFLL

Luminous Intensity Polar Plot

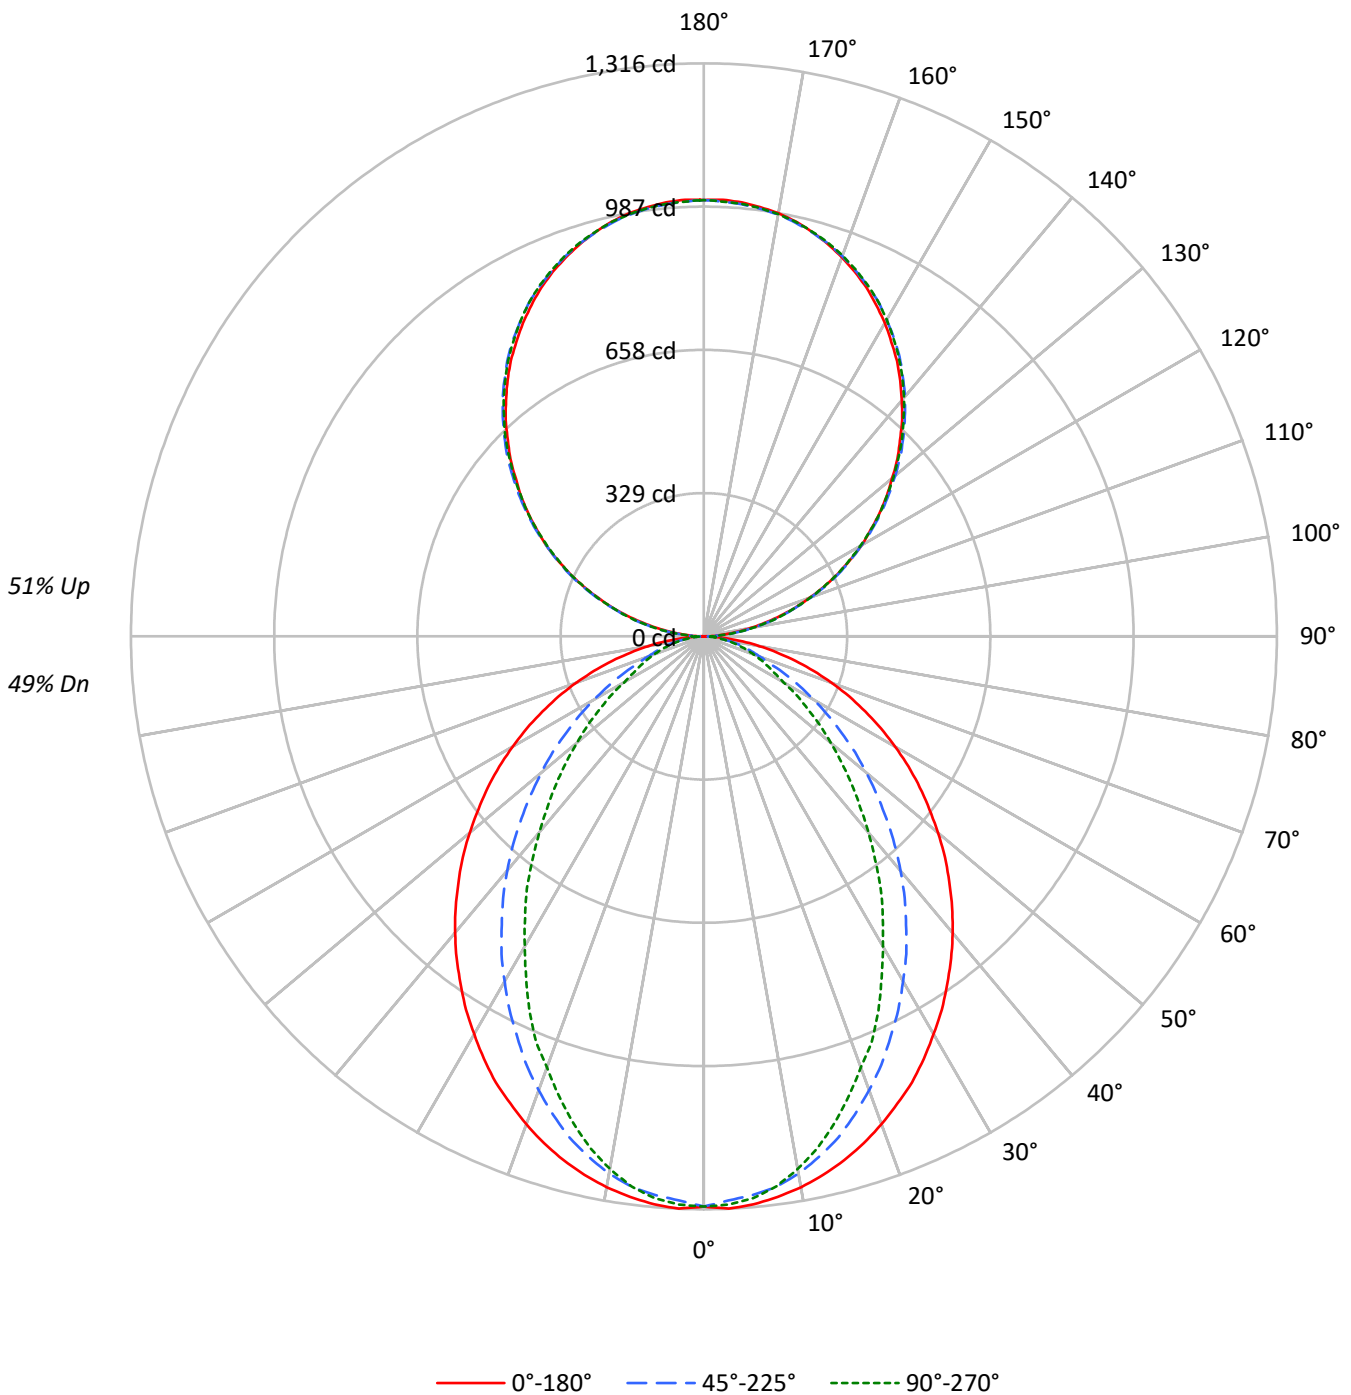



TEST NUMBER: P913599
 CATALOG NUMBER: DFN2DIP-HX4F0-040D040US927-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55	49			49
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48	42			42
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41	36			36
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35	31			31
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31	27			27
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27	24			24
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24	21			21
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22	19			19
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20	17			17
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18	16			16
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16	14			14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	974	974	974
5°	975	958	965
10°	966	940	933
15°	953	909	885
20°	935	866	825
25°	917	818	768
30°	893	769	695
35°	870	716	631
40°	845	661	557
45°	818	601	491
50°	789	540	426
55°	759	474	363
60°	724	406	299
65°	684	336	269
70°	635	271	244
75°	574	239	222
80°	485	201	193
85°	339	135	145

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 818 cd/sqm



TEST NUMBER: P913599

CATALOG NUMBER: DFN2DIP-HX4F0-040D040US927-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.7	2.2
10°-20°	336.9	6.1
20°-30°	473.1	8.6
30°-40°	515.7	9.4
40°-50°	473.9	8.6
50°-60°	372.2	6.8
60°-70°	242.3	4.4
70°-80°	124.7	2.3
80°-90°	34.7	0.6
90°-100°	62.0	1.1
100°-110°	197.0	3.6
110°-120°	337.2	6.1
120°-130°	443.5	8.1
130°-140°	497.8	9.1
140°-150°	488.1	8.9
150°-160°	409.5	7.4
160°-170°	271.5	4.9
170°-180°	94.9	1.7
0°-30°	932.7	17.0
0°-40°	1448.4	26.3
0°-60°	2294.6	41.7
0°-90°	2696.2	49.0
90°-120°	596.2	10.8
90°-150°	2025.6	36.8
90°-180°	2801.0	50.9
0°-180°	5497.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1310	1310	1310	1310	1310	
5°	1310	1304	1288	1299	1296	124
15°	1246	1233	1192	1170	1158	351
25°	1131	1093	1014	966	948	520
35°	974	914	810	735	709	610
45°	796	717	593	508	480	615
55°	606	513	385	314	292	541
65°	409	313	206	166	162	405
75°	218	135	95	86	85	231
85°	51	26	22	22	22	58
90°	1	11	30	28	29	5
95°	44	53	54	54	53	49
105°	182	184	186	188	188	192
115°	338	343	342	341	338	335
125°	492	500	497	495	494	440
135°	637	646	648	647	644	492
145°	773	779	784	785	781	483
155°	884	886	889	893	890	407
165°	961	960	960	966	962	271
175°	1000	998	996	1002	997	95
180°	1002	1002	1002	1002	1002	



TEST NUMBER: P913599

CATALOG NUMBER: DFN2DIP-HX4F0-040D040US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1309.6	1309.6	1309.6	1309.6	1309.6
2.5°	1315.6	1309.6	1296.6	1308.5	1306.1
5°	1309.6	1303.7	1288.2	1298.9	1295.5
7.5°	1298.9	1291.9	1275.3	1279.9	1274.1
10°	1284.8	1276.4	1252.8	1249.1	1242.1
12.5°	1267.0	1256.3	1224.2	1217.2	1204.1
15°	1245.6	1232.6	1192.3	1169.8	1158.0
17.5°	1220.8	1201.7	1151.9	1125.9	1106.9
20°	1192.3	1168.5	1109.3	1079.7	1053.6
22.5°	1161.5	1134.2	1065.4	1025.2	1007.5
25°	1130.7	1092.7	1014.5	966.0	948.1
27.5°	1094.0	1053.6	967.1	911.4	884.1
30°	1054.9	1009.7	914.9	854.5	822.5
32.5°	1016.9	962.3	865.2	794.1	764.4
35°	974.3	913.8	809.5	734.8	708.7
37.5°	932.8	867.5	757.3	675.5	645.9
40°	888.9	817.8	702.8	618.7	587.9
42.5°	843.8	768.0	648.3	560.5	531.0
45°	796.5	717.0	592.6	508.4	480.0
47.5°	751.5	667.3	539.3	455.1	429.0
50°	701.6	617.5	487.1	405.3	380.5
52.5°	653.0	564.1	437.4	359.1	336.6
55°	605.6	513.2	385.2	314.1	291.6
57.5°	557.1	462.2	339.0	272.6	253.7
60°	507.2	412.4	290.3	230.0	211.0
62.5°	458.8	363.9	248.8	192.0	182.6
65°	408.9	312.8	206.2	166.0	162.3
67.5°	361.6	265.5	166.0	145.8	142.2
70°	311.7	219.3	137.4	125.6	120.8
72.5°	264.4	176.6	114.9	105.5	103.1
75°	218.0	135.1	94.8	86.5	85.4
77.5°	171.9	95.9	74.7	69.9	67.5
80°	129.1	68.8	56.8	52.2	52.2
82.5°	90.1	46.3	39.1	36.7	36.7
85°	50.9	26.1	22.5	22.5	22.5
87.5°	19.0	9.4	9.4	8.3	8.3
90°	0.9	10.9	29.6	27.8	28.7
92.5°	18.7	25.3	26.3	27.2	27.2
95°	44.1	52.6	54.1	54.1	52.6
97.5°	73.4	81.3	84.6	84.6	84.6
100°	107.3	114.2	116.6	116.6	115.7
102.5°	142.9	148.1	151.4	152.3	151.4
105°	181.9	184.3	186.1	187.6	187.6
107.5°	220.5	224.2	224.2	224.7	220.5
110°	258.0	262.8	262.8	262.8	260.5



TEST NUMBER: P913599

CATALOG NUMBER: DFN2DIP-HX4F0-040D040US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	298.5	303.6	302.7	300.3	298.5
115°	338.3	343.3	341.7	340.8	338.3
117.5°	377.9	384.6	380.4	377.9	375.6
120°	417.9	424.5	417.9	417.9	415.1
122.5°	454.1	462.6	458.4	455.9	454.1
125°	492.2	499.7	497.3	494.6	493.7
127.5°	529.3	538.7	535.4	531.7	529.3
130°	564.0	575.0	573.5	571.6	568.3
132.5°	603.0	611.5	612.1	607.8	605.5
135°	636.6	645.9	647.8	646.8	644.4
137.5°	674.1	681.6	683.1	682.5	678.9
140°	706.9	714.5	718.7	718.7	715.4
142.5°	740.8	748.4	750.8	751.7	748.4
145°	772.9	778.9	783.7	784.7	781.3
147.5°	801.5	809.1	812.7	814.2	810.9
150°	831.2	836.3	839.6	842.3	839.6
152.5°	857.5	862.5	866.8	870.1	866.8
155°	883.7	886.1	888.8	893.1	890.3
157.5°	906.4	908.2	909.7	915.8	911.5
160°	926.6	928.4	929.3	934.5	930.8
162.5°	945.3	945.3	946.3	952.0	947.8
165°	961.4	960.4	960.4	966.5	962.3
167.5°	975.9	973.1	973.1	979.2	974.9
170°	986.7	984.3	983.4	989.4	984.3
172.5°	994.3	991.9	990.9	997.0	991.9
175°	1000.4	997.9	996.1	1002.1	997.0
177.5°	1003.7	1001.2	999.4	1004.6	999.4
180°	1002.1	1002.1	1002.1	1002.1	1002.1



TEST NUMBER: P913599
 CATALOG NUMBER: DFN2DIP-HX4F0-040D040US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.96	7.79	7.94	8.77	10.05	2.94	3.76	3.91	4.74	6.03
	3H	8.64	9.38	9.62	10.37	11.68	4.13	4.86	5.11	5.85	7.16
	4H	9.25	9.95	10.25	10.94	12.26	4.58	5.27	5.57	6.27	7.59
	6H	9.67	10.31	10.68	11.31	12.64	4.90	5.54	5.91	6.54	7.87
	8H	9.80	10.41	10.81	11.42	12.75	4.99	5.60	6.00	6.62	7.94
	12H	9.86	10.44	10.88	11.45	12.80	5.04	5.61	6.05	6.62	7.97
4H	2H	6.98	7.68	7.98	8.67	9.99	3.53	4.23	4.53	5.22	6.54
	3H	8.81	9.39	9.82	10.41	11.74	4.88	5.46	5.89	6.48	7.82
	4H	9.50	10.03	10.52	11.05	12.40	5.43	5.96	6.45	6.98	8.33
	6H	10.02	10.47	11.05	11.51	12.86	5.85	6.31	6.88	7.35	8.70
	8H	10.20	10.62	11.23	11.65	13.02	5.98	6.41	7.01	7.44	8.80
	12H	10.29	10.67	11.34	11.72	13.09	6.05	6.43	7.10	7.48	8.85
8H	4H	9.47	9.90	10.50	10.93	12.29	5.71	6.14	6.74	7.17	8.53
	6H	10.04	10.39	11.09	11.46	12.83	6.23	6.58	7.29	7.66	9.02
	8H	10.26	10.56	11.32	11.62	13.01	6.43	6.73	7.49	7.79	9.17
	12H	10.40	10.67	11.46	11.72	13.14	6.55	6.82	7.61	7.87	9.29
12H	4H	9.42	9.81	10.47	10.85	12.22	5.72	6.10	6.77	7.15	8.52
	6H	10.01	10.32	11.08	11.38	12.76	6.28	6.59	7.34	7.65	9.03
	8H	10.24	10.51	11.30	11.56	12.98	6.49	6.76	7.56	7.82	9.24