

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913609

Luminaire Tested: DFN2DIP-HX4F0-040D090US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913609
REPORT IS A COMBINATION OF REPORTS P899390 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-040D090US927-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9003.1 lumens
Efficiency: N/A
Efficacy: 106.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 84.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913609

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US927-RLFL

Luminous Intensity Polar Plot

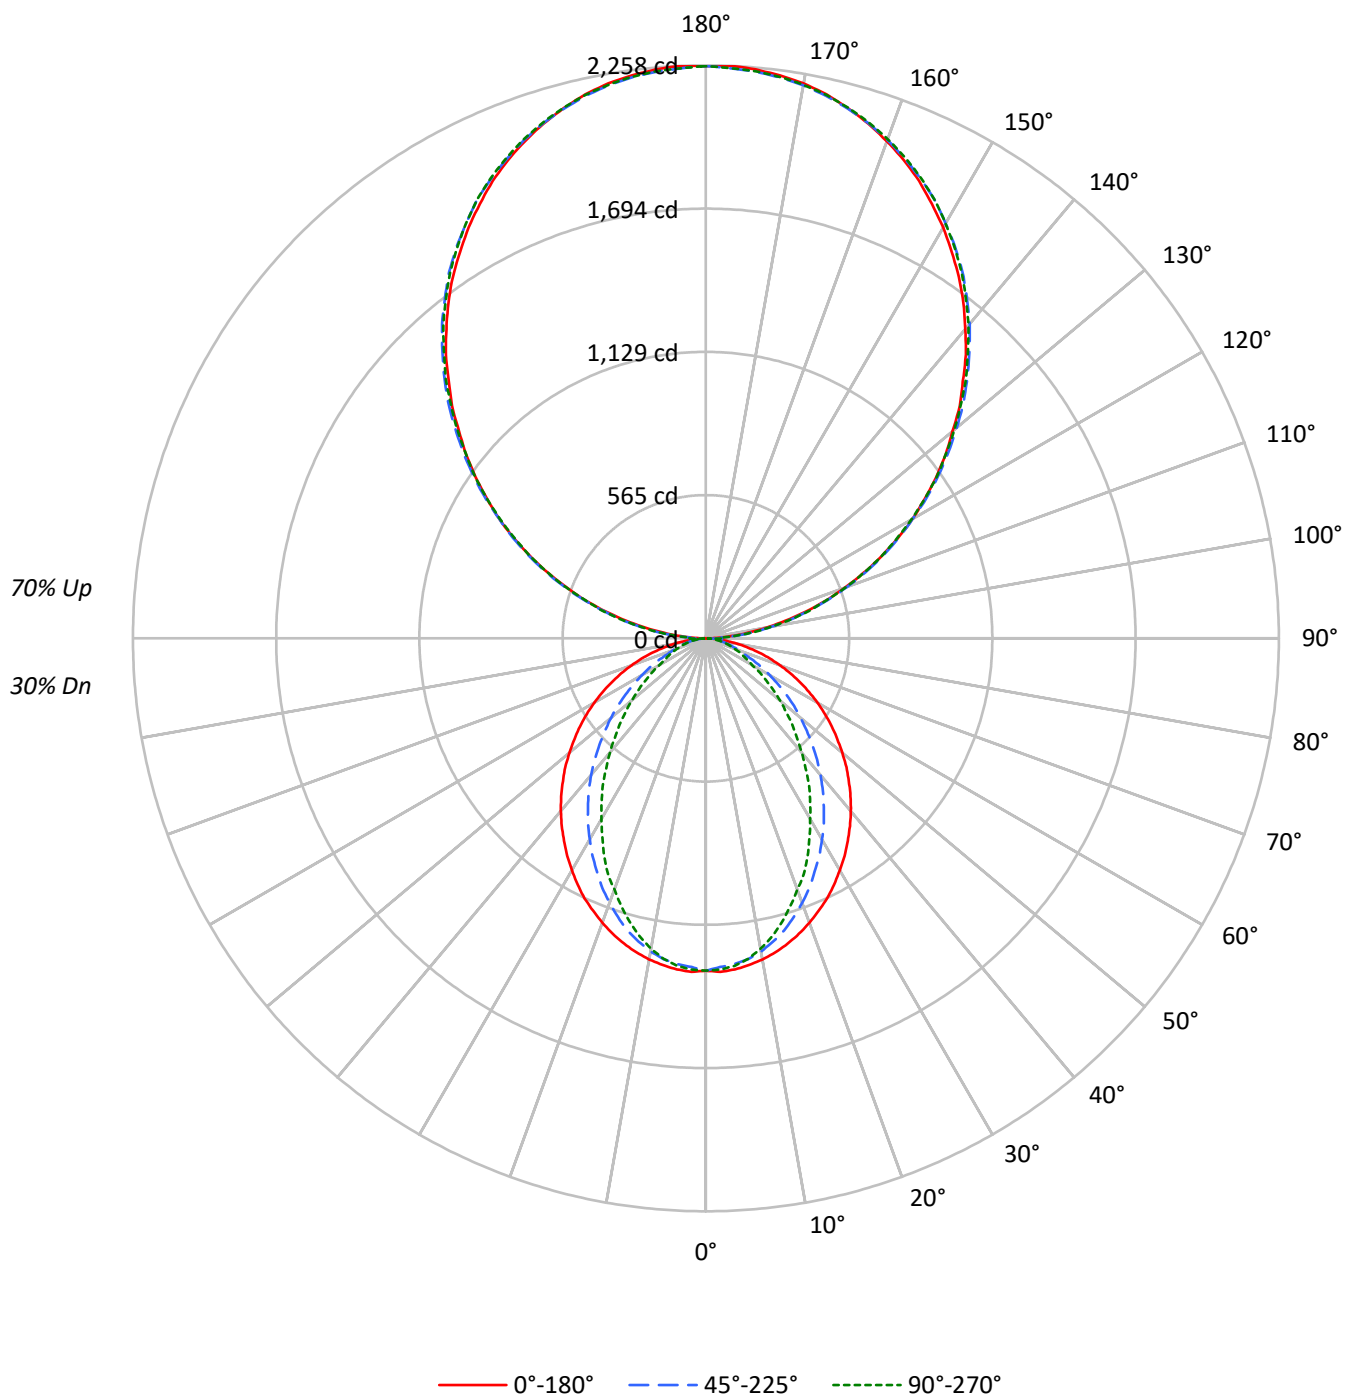

TEST NUMBER: P913609

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US927-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	94	89	86	83	84	80	77	75	64	62	60	48	47	46	34	33	32
2	85	78	73	68	76	71	66	62	56	53	50	43	40	38	30	29	28
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16
7	56	44	37	31	50	40	33	29	32	27	24	25	22	19	18	16	14
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13
9	48	36	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12
10	45	33	27	22	40	30	24	20	25	20	17	19	16	14	14	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	974	974	974
5°	975	958	965
10°	966	940	933
15°	953	909	885
20°	935	866	825
25°	917	818	768
30°	893	769	695
35°	870	716	631
40°	845	661	557
45°	818	601	491
50°	789	540	426
55°	759	474	363
60°	724	406	299
65°	684	336	269
70°	635	271	244
75°	574	239	222
80°	485	201	193
85°	339	135	145

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1701 cd/sqm

TEST NUMBER: P913609

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US927-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.7	1.4
10°-20°	336.9	3.7
20°-30°	473.1	5.3
30°-40°	515.7	5.7
40°-50°	473.9	5.3
50°-60°	372.2	4.1
60°-70°	242.3	2.7
70°-80°	124.7	1.4
80°-90°	38.2	0.4
90°-100°	139.5	1.5
100°-110°	443.3	4.9
110°-120°	758.7	8.4
120°-130°	997.8	11.1
130°-140°	1120.0	12.4
140°-150°	1098.2	12.2
150°-160°	921.3	10.2
160°-170°	611.0	6.8
170°-180°	213.5	2.4
0°-30°	932.7	10.4
0°-40°	1448.4	16.1
0°-60°	2294.6	25.5
0°-90°	2699.8	30.0
90°-120°	1341.5	14.9
90°-150°	4557.5	50.6
90°-180°	6303.0	70.0
0°-180°	9003.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1310	1310	1310	1310	1310	
5°	1310	1304	1288	1299	1296	124
15°	1246	1233	1192	1170	1158	351
25°	1131	1093	1014	966	948	520
35°	974	914	810	735	709	610
45°	796	717	593	508	480	615
55°	606	513	385	314	292	541
65°	409	313	206	166	162	405
75°	218	135	95	86	85	231
85°	51	26	22	22	22	58
90°	2	24	67	62	65	9
95°	99	118	122	122	118	110
105°	409	415	419	422	422	432
115°	761	772	769	767	761	753
125°	1107	1124	1119	1113	1111	990
135°	1432	1453	1458	1455	1450	1107
145°	1739	1752	1763	1765	1758	1086
155°	1988	1994	2000	2009	2003	915
165°	2163	2161	2161	2175	2165	610
175°	2251	2245	2241	2255	2243	214
180°	2255	2255	2255	2255	2255	

TEST NUMBER: P913609

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1309.6	1309.6	1309.6	1309.6	1309.6
2.5°	1315.6	1309.6	1296.6	1308.5	1306.1
5°	1309.6	1303.7	1288.2	1298.9	1295.5
7.5°	1298.9	1291.9	1275.3	1279.9	1274.1
10°	1284.8	1276.4	1252.8	1249.1	1242.1
12.5°	1267.0	1256.3	1224.2	1217.2	1204.1
15°	1245.6	1232.6	1192.3	1169.8	1158.0
17.5°	1220.8	1201.7	1151.9	1125.9	1106.9
20°	1192.3	1168.5	1109.3	1079.7	1053.6
22.5°	1161.5	1134.2	1065.4	1025.2	1007.5
25°	1130.7	1092.7	1014.5	966.0	948.1
27.5°	1094.0	1053.6	967.1	911.4	884.1
30°	1054.9	1009.7	914.9	854.5	822.5
32.5°	1016.9	962.3	865.2	794.1	764.4
35°	974.3	913.8	809.5	734.8	708.7
37.5°	932.8	867.5	757.3	675.5	645.9
40°	888.9	817.8	702.8	618.7	587.9
42.5°	843.8	768.0	648.3	560.5	531.0
45°	796.5	717.0	592.6	508.4	480.0
47.5°	751.5	667.3	539.3	455.1	429.0
50°	701.6	617.5	487.1	405.3	380.5
52.5°	653.0	564.1	437.4	359.1	336.6
55°	605.6	513.2	385.2	314.1	291.6
57.5°	557.1	462.2	339.0	272.6	253.7
60°	507.2	412.4	290.3	230.0	211.0
62.5°	458.8	363.9	248.8	192.0	182.6
65°	408.9	312.8	206.2	166.0	162.3
67.5°	361.6	265.5	166.0	145.8	142.2
70°	311.7	219.3	137.4	125.6	120.8
72.5°	264.4	176.6	114.9	105.5	103.1
75°	218.0	135.1	94.8	86.5	85.4
77.5°	171.9	95.9	74.7	69.9	67.5
80°	129.1	68.8	56.8	52.2	52.2
82.5°	90.1	46.3	39.1	36.7	36.7
85°	50.9	26.1	22.5	22.5	22.5
87.5°	19.0	9.4	9.4	8.3	8.3
90°	2.1	24.5	66.6	62.5	64.6
92.5°	42.1	57.1	59.2	61.2	61.2
95°	99.3	118.3	121.7	121.7	118.3
97.5°	165.2	182.8	190.4	190.4	190.4
100°	241.3	257.0	262.4	262.4	260.4
102.5°	321.5	333.1	340.6	342.6	340.6
105°	409.2	414.6	418.7	422.2	422.2
107.5°	496.2	504.4	504.4	505.7	496.2
110°	580.5	591.4	591.4	591.4	586.0

TEST NUMBER: P913609

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	671.6	683.2	681.1	675.7	671.6
115°	761.4	772.2	768.8	766.8	761.4
117.5°	850.4	865.4	855.9	850.4	844.9
120°	940.2	955.1	940.2	940.2	934.0
122.5°	1021.7	1040.8	1031.3	1025.8	1021.7
125°	1107.4	1124.3	1119.0	1112.8	1110.8
127.5°	1191.0	1212.0	1204.6	1196.4	1191.0
130°	1269.2	1293.6	1290.2	1286.1	1278.7
132.5°	1356.8	1375.9	1377.2	1367.7	1362.3
135°	1432.3	1453.3	1457.5	1455.4	1450.0
137.5°	1516.6	1533.6	1537.0	1535.6	1527.5
140°	1590.7	1607.7	1617.2	1617.2	1609.7
142.5°	1666.8	1683.8	1689.2	1691.3	1683.8
145°	1738.9	1752.5	1763.3	1765.4	1757.9
147.5°	1803.5	1820.4	1828.6	1832.0	1824.6
150°	1870.1	1881.7	1889.1	1895.2	1889.1
152.5°	1929.2	1940.8	1950.3	1957.8	1950.3
155°	1988.4	1993.8	1999.9	2009.4	2003.3
157.5°	2039.3	2043.4	2046.8	2060.4	2050.9
160°	2084.9	2089.0	2091.0	2102.5	2094.4
162.5°	2127.0	2127.0	2129.1	2142.0	2132.5
165°	2163.1	2161.0	2161.0	2174.6	2165.1
167.5°	2195.7	2189.6	2189.6	2203.1	2193.6
170°	2220.2	2214.7	2212.7	2226.3	2214.7
172.5°	2237.1	2231.7	2229.7	2243.3	2231.7
175°	2250.7	2245.3	2241.2	2254.9	2243.3
177.5°	2258.2	2252.8	2248.7	2260.3	2248.7
180°	2254.9	2254.9	2254.9	2254.9	2254.9

TEST NUMBER: P913609

CATALOG NUMBER: DFN2DIP-HX4F0-040D090US927-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.82	5.51	5.94	6.62	8.15	0.79	1.48	1.91	2.59	4.12
	3H	6.49	7.10	7.61	8.22	9.77	1.97	2.59	3.10	3.70	5.25
	4H	7.09	7.67	8.22	8.79	10.35	2.42	3.00	3.55	4.12	5.67
	6H	7.50	8.04	8.65	9.16	10.73	2.73	3.27	3.87	4.39	5.96
	8H	7.63	8.14	8.77	9.27	10.83	2.82	3.33	3.96	4.47	6.02
	12H	7.68	8.17	8.83	9.30	10.88	2.86	3.34	4.01	4.47	6.05
4H	2H	4.82	5.40	5.96	6.52	8.08	1.37	1.96	2.51	3.07	4.63
	3H	6.64	7.12	7.78	8.27	9.83	2.71	3.20	3.86	4.34	5.91
	4H	7.32	7.77	8.47	8.90	10.49	3.25	3.70	4.40	4.83	6.42
	6H	7.83	8.22	8.99	9.37	10.95	3.67	4.05	4.82	5.20	6.78
	8H	8.01	8.36	9.16	9.51	11.10	3.79	4.15	4.95	5.30	6.89
	12H	8.10	8.42	9.27	9.58	11.18	3.85	4.18	5.02	5.34	6.93
8H	4H	7.28	7.64	8.44	8.79	10.38	3.52	3.88	4.68	5.03	6.62
	6H	7.84	8.14	9.02	9.33	10.92	4.04	4.33	5.21	5.52	7.11
	8H	8.06	8.32	9.24	9.49	11.10	4.23	4.49	5.41	5.65	7.27
	12H	8.19	8.42	9.38	9.59	11.23	4.34	4.57	5.53	5.74	7.38
12H	4H	7.23	7.55	8.40	8.71	10.31	3.52	3.85	4.69	5.00	6.60
	6H	7.82	8.08	9.00	9.24	10.85	4.09	4.35	5.27	5.51	7.12
	8H	8.04	8.26	9.22	9.43	11.07	4.29	4.52	5.48	5.68	7.33