

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913687

Luminaire Tested: DFN2DIP-HX4F0-080D120US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913687
REPORT IS A COMBINATION OF REPORTS P899452 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-080D120US927-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13799.7 lumens
Efficiency: N/A
Efficacy: 92.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 149.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913687

CATALOG NUMBER: DFN2DIP-HX4F0-080D120US927-RLFL

Luminous Intensity Polar Plot

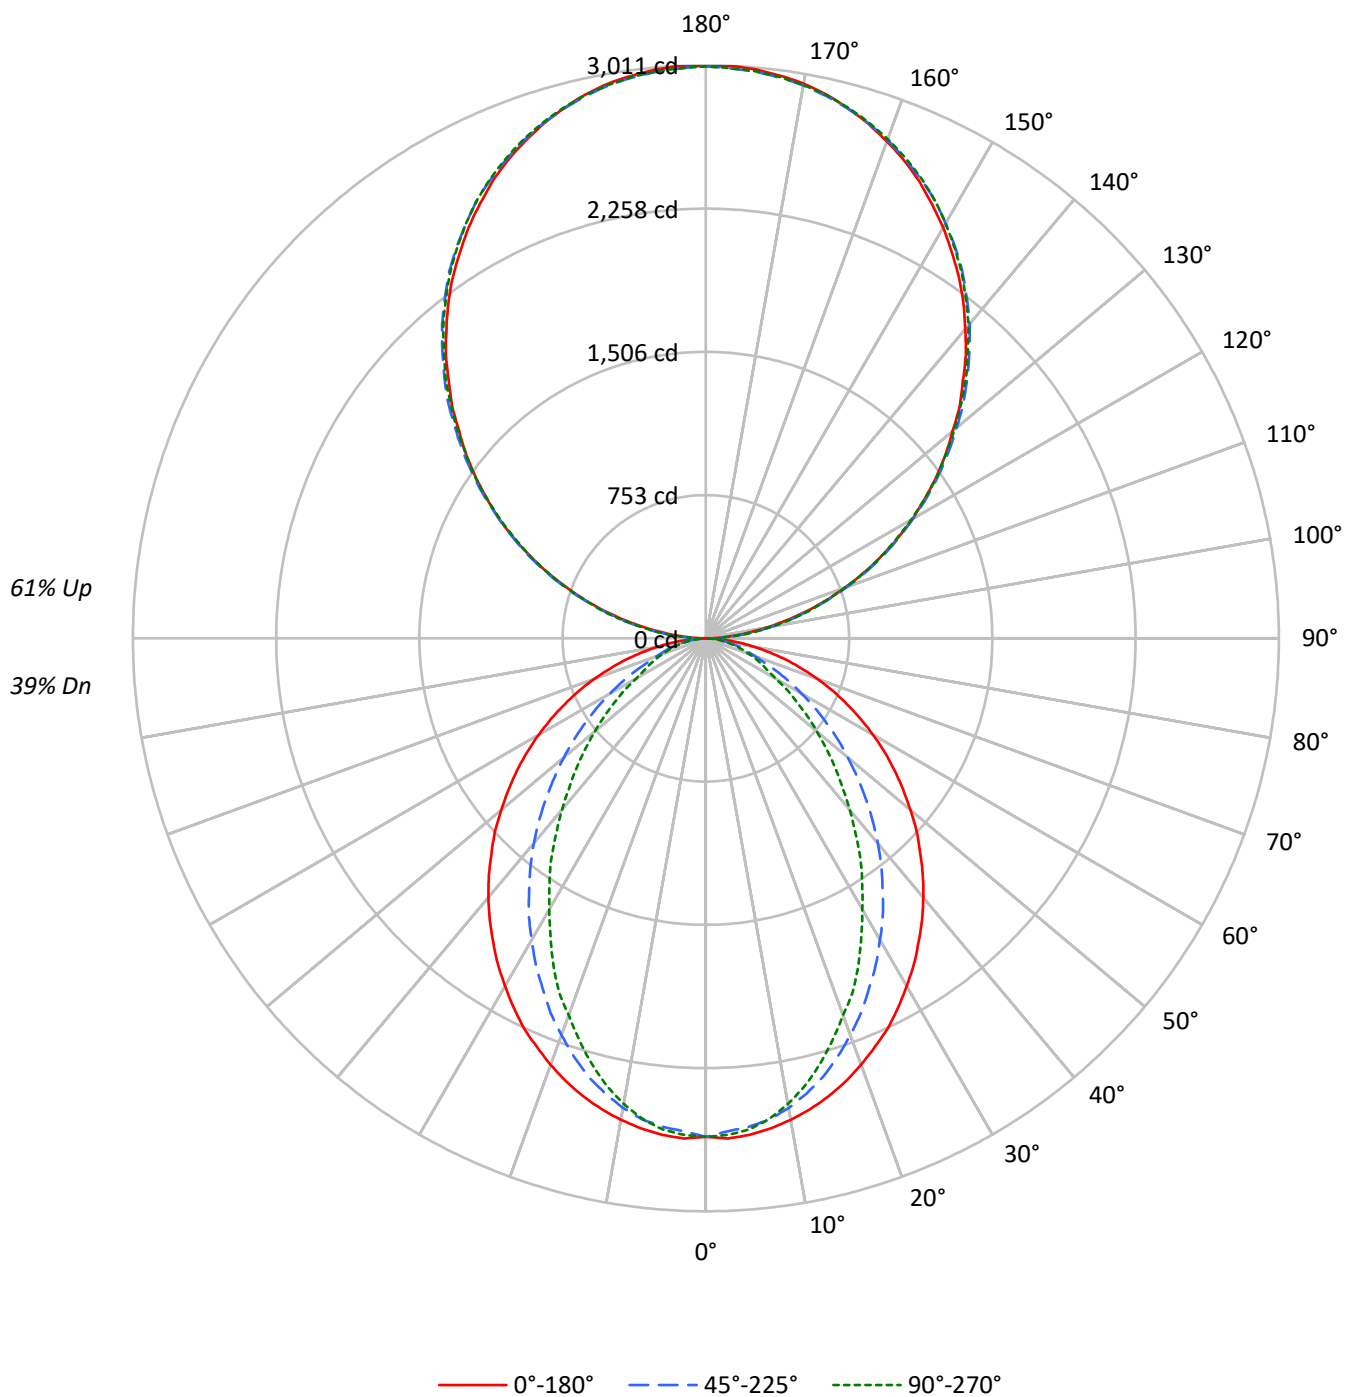

TEST NUMBER: P913687

CATALOG NUMBER: DFN2DIP-HX4F0-080D120US927-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46
1	96	92	88	85	87	83	80	78	68	66	64	54	53	51	41	40	40
2	87	80	75	70	79	73	68	64	60	57	54	48	46	44	37	35	34
3	80	71	64	58	73	65	59	54	53	49	46	43	40	37	33	31	29
4	73	63	55	50	66	58	51	46	48	43	39	38	35	32	30	27	26
5	67	56	48	43	61	52	45	40	43	38	34	35	31	28	27	24	22
6	62	51	43	37	56	46	40	35	39	33	30	31	28	25	25	22	20
7	57	46	38	33	52	42	35	30	35	30	26	29	25	22	22	20	18
8	53	41	34	29	49	38	32	27	32	27	23	26	22	20	21	18	16
9	50	38	31	26	45	35	29	24	29	24	21	24	20	18	19	17	15
10	46	35	28	23	42	32	26	22	27	22	19	22	19	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1948	1948	1948
5°	1951	1917	1929
10°	1932	1879	1866
15°	1905	1818	1769
20°	1870	1732	1650
25°	1834	1636	1535
30°	1786	1538	1390
35°	1739	1432	1262
40°	1691	1323	1115
45°	1635	1202	982
50°	1577	1079	852
55°	1517	948	727
60°	1447	811	598
65°	1367	672	538
70°	1270	542	488
75°	1148	478	444
80°	971	402	385
85°	679	269	290

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2267 cd/sqm

TEST NUMBER: P913687

CATALOG NUMBER: DFN2DIP-HX4F0-080D120US927-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	245.5	1.8
10°-20°	673.9	4.9
20°-30°	946.1	6.9
30°-40°	1031.3	7.5
40°-50°	947.9	6.9
50°-60°	744.4	5.4
60°-70°	484.5	3.5
70°-80°	249.4	1.8
80°-90°	72.2	0.5
90°-100°	186.0	1.3
100°-110°	591.1	4.3
110°-120°	1011.6	7.3
120°-130°	1330.4	9.6
130°-140°	1493.3	10.8
140°-150°	1464.3	10.6
150°-160°	1228.4	8.9
160°-170°	814.6	5.9
170°-180°	284.7	2.1
0°-30°	1865.5	13.5
0°-40°	2896.8	21.0
0°-60°	4589.2	33.3
0°-90°	5395.4	39.1
90°-120°	1788.7	13.0
90°-150°	6076.6	44.0
90°-180°	8404.0	60.9
0°-180°	13799.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2619	2619	2619	2619	2619	
5°	2619	2608	2576	2598	2591	248
15°	2491	2465	2385	2340	2316	702
25°	2261	2186	2029	1932	1896	1040
35°	1948	1828	1619	1470	1417	1220
45°	1593	1434	1185	1017	960	1230
55°	1211	1026	770	628	583	1082
65°	818	626	412	332	325	811
75°	436	270	190	173	171	461
85°	102	52	45	45	45	117
90°	3	33	89	83	86	14
95°	132	158	162	162	158	147
105°	546	553	558	563	563	576
115°	1015	1030	1025	1022	1015	1004
125°	1476	1499	1492	1484	1481	1319
135°	1910	1938	1943	1940	1933	1476
145°	2318	2337	2351	2354	2344	1449
155°	2651	2658	2667	2679	2671	1220
165°	2884	2881	2881	2900	2887	814
175°	3001	2994	2988	3006	2991	285
180°	3006	3006	3006	3006	3006	

TEST NUMBER: P913687

CATALOG NUMBER: DFN2DIP-HX4F0-080D120US927-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2619.3	2619.3	2619.3	2619.3	2619.3
2.5°	2631.1	2619.3	2593.1	2617.0	2612.2
5°	2619.3	2607.5	2576.5	2597.9	2590.8
7.5°	2597.9	2583.8	2550.6	2559.9	2548.1
10°	2569.4	2552.9	2505.6	2498.3	2484.2
12.5°	2534.0	2512.6	2448.5	2434.4	2408.2
15°	2491.3	2465.1	2384.6	2339.6	2315.9
17.5°	2441.4	2403.5	2303.9	2251.9	2213.8
20°	2384.6	2337.1	2218.7	2159.6	2107.2
22.5°	2323.0	2268.4	2130.9	2050.4	2014.9
25°	2261.4	2185.5	2029.0	1932.0	1896.2
27.5°	2187.9	2107.2	1934.2	1822.8	1768.2
30°	2109.7	2019.4	1829.9	1709.1	1645.0
32.5°	2033.8	1924.7	1730.5	1588.2	1528.8
35°	1948.5	1827.6	1619.1	1469.7	1417.4
37.5°	1865.5	1735.0	1514.7	1351.0	1291.9
40°	1777.8	1635.7	1405.6	1237.3	1175.7
42.5°	1687.7	1536.1	1296.6	1121.2	1062.0
45°	1592.9	1434.0	1185.3	1016.8	960.0
47.5°	1502.9	1334.7	1078.6	910.1	858.1
50°	1403.3	1235.1	974.3	810.6	761.0
52.5°	1306.0	1128.1	874.6	718.3	673.3
55°	1211.2	1026.3	770.3	628.2	583.2
57.5°	1114.1	924.5	678.0	545.3	507.2
60°	1014.5	824.9	580.7	459.9	422.0
62.5°	917.4	727.8	497.7	384.0	365.2
65°	817.8	625.7	412.4	332.0	324.6
67.5°	723.0	530.9	332.0	291.4	284.5
70°	623.4	438.6	274.9	251.2	241.7
72.5°	528.6	353.1	229.9	211.0	206.2
75°	436.1	270.1	189.6	173.0	170.8
77.5°	343.8	191.9	149.4	139.8	135.1
80°	258.3	137.6	113.7	104.3	104.3
82.5°	180.1	92.5	78.2	73.4	73.4
85°	101.9	52.0	45.0	45.0	45.0
87.5°	37.9	18.9	18.9	16.6	16.6
90°	2.7	32.6	88.8	83.4	86.1
92.5°	56.2	76.1	78.8	81.6	81.6
95°	132.3	157.7	162.2	162.2	157.7
97.5°	220.2	243.8	253.8	253.8	253.8
100°	321.8	342.6	349.8	349.8	347.1
102.5°	428.7	444.1	454.1	456.9	454.1
105°	545.7	552.9	558.3	562.8	562.8
107.5°	661.6	672.6	672.6	674.3	661.6
110°	774.0	788.5	788.5	788.5	781.3

TEST NUMBER: P913687

CATALOG NUMBER: DFN2DIP-HX4F0-080D120US927-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	895.5	910.9	908.2	900.9	895.5
115°	1015.1	1029.7	1025.1	1022.4	1015.1
117.5°	1133.8	1153.8	1141.1	1133.8	1126.6
120°	1253.5	1273.4	1253.5	1253.5	1245.4
122.5°	1362.3	1387.7	1375.0	1367.7	1362.3
125°	1476.5	1499.1	1491.9	1483.8	1481.0
127.5°	1588.0	1616.0	1606.1	1595.2	1588.0
130°	1692.2	1724.8	1720.3	1714.8	1704.9
132.5°	1809.1	1834.5	1836.3	1823.6	1816.4
135°	1909.7	1937.8	1943.3	1940.5	1933.3
137.5°	2022.1	2044.8	2049.3	2047.5	2036.6
140°	2120.9	2143.6	2156.2	2156.2	2146.3
142.5°	2222.5	2245.1	2252.3	2255.0	2245.1
145°	2318.5	2336.6	2351.1	2353.9	2343.9
147.5°	2404.6	2427.2	2438.2	2442.7	2432.7
150°	2493.5	2508.8	2518.8	2527.0	2518.8
152.5°	2572.3	2587.7	2600.4	2610.4	2600.4
155°	2651.1	2658.4	2666.6	2679.2	2671.1
157.5°	2719.2	2724.5	2729.1	2747.2	2734.5
160°	2779.8	2785.3	2788.0	2803.4	2792.5
162.5°	2836.0	2836.0	2838.8	2856.0	2843.3
165°	2884.1	2881.4	2881.4	2899.5	2886.8
167.5°	2927.6	2919.4	2919.4	2937.6	2924.9
170°	2960.2	2952.9	2950.2	2968.4	2952.9
172.5°	2982.9	2975.6	2972.9	2991.0	2975.6
175°	3001.0	2993.7	2988.3	3006.4	2991.0
177.5°	3011.0	3003.7	2998.2	3013.7	2998.2
180°	3006.4	3006.4	3006.4	3006.4	3006.4

TEST NUMBER: P913687

CATALOG NUMBER: DFN2DIP-HX4F0-080D120US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.35	9.10	9.40	10.15	11.57	4.32	5.07	5.38	6.12	7.55
	3H	10.02	10.69	11.08	11.75	13.19	5.51	6.18	6.57	7.24	8.68
	4H	10.63	11.26	11.70	12.32	13.77	5.96	6.59	7.03	7.65	9.10
	6H	11.05	11.63	12.13	12.70	14.15	6.27	6.86	7.36	7.92	9.38
	8H	11.17	11.73	12.26	12.81	14.26	6.36	6.92	7.45	8.00	9.45
	12H	11.23	11.76	12.32	12.83	14.31	6.41	6.93	7.50	8.01	9.48
4H	2H	8.36	8.99	9.44	10.06	11.50	4.91	5.54	5.99	6.61	8.05
	3H	10.18	10.71	11.27	11.80	13.26	6.25	6.78	7.34	7.87	9.33
	4H	10.87	11.36	11.96	12.44	13.92	6.80	7.28	7.89	8.36	9.85
	6H	11.38	11.80	12.48	12.90	14.38	7.22	7.63	8.32	8.74	10.21
	8H	11.56	11.94	12.66	13.04	14.53	7.35	7.73	8.44	8.83	10.32
	12H	11.65	12.00	12.77	13.11	14.60	7.41	7.76	8.52	8.87	10.36
8H	4H	10.83	11.22	11.93	12.32	13.81	7.08	7.46	8.17	8.56	10.05
	6H	11.40	11.72	12.52	12.86	14.34	7.59	7.91	8.71	9.05	10.54
	8H	11.62	11.89	12.74	13.01	14.52	7.78	8.06	8.91	9.18	10.69
	12H	11.75	12.00	12.88	13.11	14.66	7.90	8.15	9.03	9.26	10.81
12H	4H	10.78	11.13	11.90	12.24	13.74	7.08	7.43	8.19	8.54	10.03
	6H	11.37	11.65	12.50	12.77	14.28	7.64	7.92	8.77	9.04	10.55
	8H	11.59	11.84	12.72	12.95	14.50	7.85	8.10	8.98	9.21	10.76

END OF REPORT