

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913688

Luminaire Tested: DFN2DIP-HX4F0-090D040US927-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913688
REPORT IS A COMBINATION OF REPORTS P899309 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-090D040US927-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9862.7 lumens
Efficiency: N/A
Efficacy: 87.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 112.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9821
Total Harmonic Distortion (THDi): 0.08
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913688

CATALOG NUMBER: DFN2DIP-HX4F0-090D040US927-FLLFLL

Luminous Intensity Polar Plot

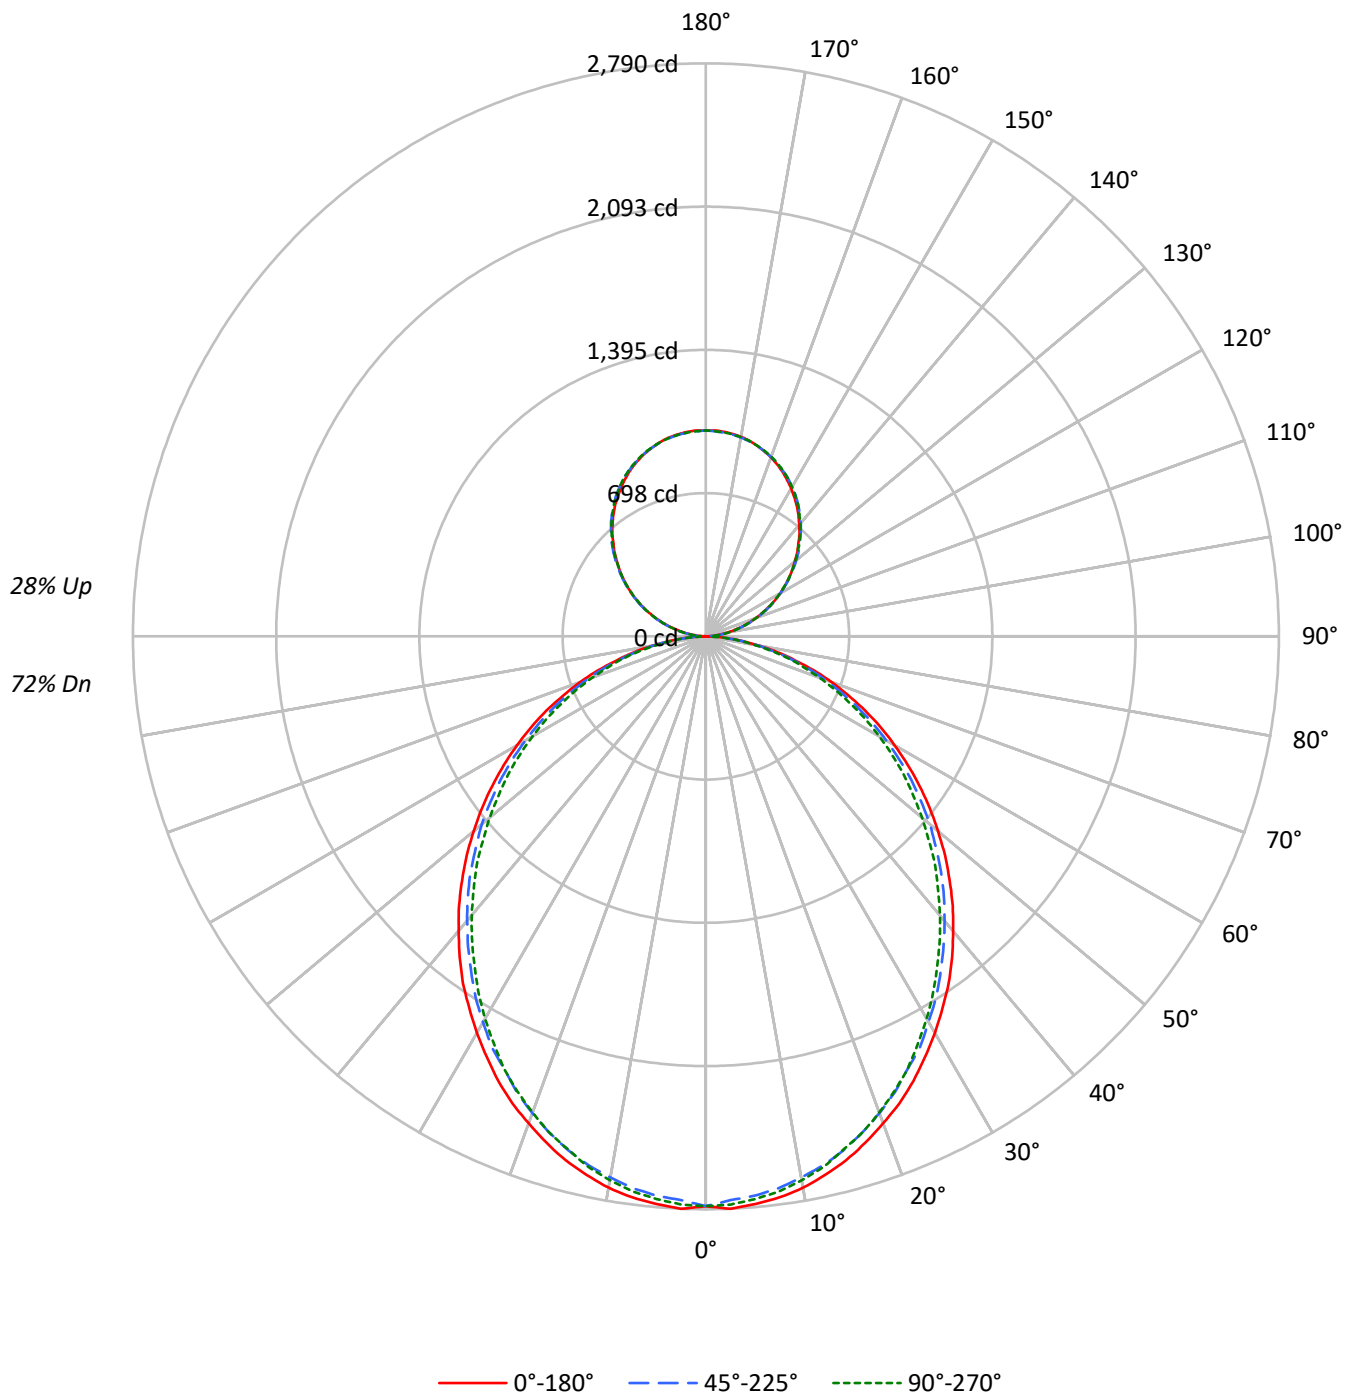

TEST NUMBER: P913688

CATALOG NUMBER: DFN2DIP-HX4F0-090D040US927-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76
1	103	98	94	91	97	93	90	86	84	81	79	75	73	71	67	66	64
2	93	86	79	74	88	81	76	71	73	69	65	66	63	59	59	56	54
3	85	75	68	62	81	72	65	59	65	59	55	58	54	50	52	49	46
4	78	67	59	52	74	64	56	51	58	52	47	52	47	43	47	43	40
5	72	60	51	45	68	57	49	44	52	45	41	47	42	38	42	38	35
6	66	54	45	39	63	51	44	38	47	40	35	42	37	33	38	34	31
7	61	49	40	35	58	47	39	34	42	36	31	39	33	29	35	31	27
8	57	44	36	31	54	42	35	30	39	33	28	35	30	26	32	28	24
9	53	41	33	28	50	39	32	27	36	30	25	33	27	24	30	25	22
10	50	37	30	25	47	36	29	24	33	27	23	30	25	21	28	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2063	2063	2063
5°	2066	2034	2048
10°	2050	2007	2020
15°	2020	1974	1977
20°	1979	1928	1933
25°	1939	1874	1882
30°	1888	1823	1816
35°	1840	1763	1748
40°	1781	1702	1682
45°	1722	1641	1615
50°	1658	1578	1537
55°	1591	1504	1466
60°	1515	1416	1384
65°	1432	1326	1288
70°	1326	1215	1184
75°	1180	1083	1089
80°	1004	914	906
85°	728	623	602

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1722 cd/sqm

TEST NUMBER: P913688

CATALOG NUMBER: DFN2DIP-HX4F0-090D040US927-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	261.1	2.6
10°-20°	734.7	7.4
20°-30°	1079.6	10.9
30°-40°	1253.9	12.7
40°-50°	1252.4	12.7
50°-60°	1092.1	11.1
60°-70°	807.3	8.2
70°-80°	456.7	4.6
80°-90°	123.4	1.3
90°-100°	62.0	0.6
100°-110°	197.0	2.0
110°-120°	337.2	3.4
120°-130°	443.5	4.5
130°-140°	497.8	5.0
140°-150°	488.1	4.9
150°-160°	409.5	4.2
160°-170°	271.5	2.8
170°-180°	94.9	1.0
0°-30°	2075.4	21.0
0°-40°	3329.4	33.8
0°-60°	5673.8	57.5
0°-90°	7061.2	71.6
90°-120°	596.2	6.0
90°-150°	2025.6	20.5
90°-180°	2801.0	28.4
0°-180°	9862.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2774	2774	2774	2774	2774	
5°	2774	2764	2734	2756	2750	263
15°	2641	2625	2590	2601	2588	744
25°	2390	2369	2324	2329	2324	1100
35°	2062	2036	1993	1977	1963	1288
45°	1678	1659	1619	1590	1579	1295
55°	1270	1254	1222	1190	1176	1135
65°	856	840	814	790	776	847
75°	448	443	429	414	419	478
85°	109	107	104	96	93	122
90°	1	11	30	28	29	9
95°	44	53	54	54	53	49
105°	182	184	186	188	188	192
115°	338	343	342	341	338	335
125°	492	500	497	495	494	440
135°	637	646	648	647	644	492
145°	773	779	784	785	781	483
155°	884	886	889	893	890	407
165°	961	960	960	966	962	271
175°	1000	998	996	1002	997	95
180°	1002	1002	1002	1002	1002	

TEST NUMBER: P913688

CATALOG NUMBER: DFN2DIP-HX4F0-090D040US927-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2774.1	2774.1	2774.1	2774.1	2774.1
2.5°	2790.3	2777.0	2747.6	2774.1	2769.1
5°	2774.1	2763.7	2734.3	2755.5	2750.4
7.5°	2755.5	2739.7	2710.2	2731.8	2726.4
10°	2726.4	2707.7	2675.7	2696.9	2689.0
12.5°	2686.1	2670.3	2638.4	2651.6	2646.3
15°	2640.9	2625.1	2590.2	2601.0	2587.7
17.5°	2584.8	2569.0	2534.2	2547.5	2534.2
20°	2523.4	2507.6	2470.2	2478.1	2467.6
22.5°	2462.3	2438.3	2403.4	2403.4	2398.0
25°	2390.1	2368.9	2323.6	2328.7	2323.6
27.5°	2310.0	2291.3	2256.8	2248.9	2235.6
30°	2230.2	2208.7	2168.8	2160.8	2150.1
32.5°	2144.8	2128.9	2086.1	2070.0	2059.3
35°	2062.1	2035.5	1992.7	1976.7	1963.3
37.5°	1968.7	1944.6	1901.9	1883.3	1869.9
40°	1872.7	1851.2	1808.5	1784.7	1774.0
42.5°	1779.3	1757.8	1715.4	1688.5	1672.7
45°	1678.0	1659.4	1619.1	1590.0	1579.3
47.5°	1579.3	1560.6	1517.8	1488.4	1472.6
50°	1475.1	1461.8	1424.4	1387.1	1373.8
52.5°	1373.8	1355.1	1320.6	1291.2	1272.5
55°	1269.9	1253.8	1221.8	1189.9	1176.5
57.5°	1165.8	1152.5	1117.7	1085.7	1074.9
60°	1061.6	1051.1	1013.8	984.4	976.4
62.5°	960.3	941.6	915.0	888.4	877.7
65°	856.4	840.3	813.6	789.6	776.3
67.5°	749.7	736.2	712.3	693.7	682.9
70°	650.9	640.2	616.2	597.5	587.0
72.5°	549.6	538.8	525.5	506.9	499.0
75°	448.1	442.9	429.4	413.5	418.9
77.5°	357.4	346.7	341.4	333.4	325.5
80°	266.9	264.0	258.6	250.7	245.4
82.5°	181.4	181.4	178.9	168.1	168.1
85°	109.2	106.7	104.2	95.9	93.4
87.5°	48.1	42.7	37.4	29.5	26.6
90°	0.9	10.9	29.6	27.8	28.7
92.5°	18.7	25.3	26.3	27.2	27.2
95°	44.1	52.6	54.1	54.1	52.6
97.5°	73.4	81.3	84.6	84.6	84.6
100°	107.3	114.2	116.6	116.6	115.7
102.5°	142.9	148.1	151.4	152.3	151.4
105°	181.9	184.3	186.1	187.6	187.6
107.5°	220.5	224.2	224.2	224.7	220.5
110°	258.0	262.8	262.8	262.8	260.5

TEST NUMBER: P913688

CATALOG NUMBER: DFN2DIP-HX4F0-090D040US927-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	298.5	303.6	302.7	300.3	298.5
115°	338.3	343.3	341.7	340.8	338.3
117.5°	377.9	384.6	380.4	377.9	375.6
120°	417.9	424.5	417.9	417.9	415.1
122.5°	454.1	462.6	458.4	455.9	454.1
125°	492.2	499.7	497.3	494.6	493.7
127.5°	529.3	538.7	535.4	531.7	529.3
130°	564.0	575.0	573.5	571.6	568.3
132.5°	603.0	611.5	612.1	607.8	605.5
135°	636.6	645.9	647.8	646.8	644.4
137.5°	674.1	681.6	683.1	682.5	678.9
140°	706.9	714.5	718.7	718.7	715.4
142.5°	740.8	748.4	750.8	751.7	748.4
145°	772.9	778.9	783.7	784.7	781.3
147.5°	801.5	809.1	812.7	814.2	810.9
150°	831.2	836.3	839.6	842.3	839.6
152.5°	857.5	862.5	866.8	870.1	866.8
155°	883.7	886.1	888.8	893.1	890.3
157.5°	906.4	908.2	909.7	915.8	911.5
160°	926.6	928.4	929.3	934.5	930.8
162.5°	945.3	945.3	946.3	952.0	947.8
165°	961.4	960.4	960.4	966.5	962.3
167.5°	975.9	973.1	973.1	979.2	974.9
170°	986.7	984.3	983.4	989.4	984.3
172.5°	994.3	991.9	990.9	997.0	991.9
175°	1000.4	997.9	996.1	1002.1	997.0
177.5°	1003.7	1001.2	999.4	1004.6	999.4
180°	1002.1	1002.1	1002.1	1002.1	1002.1

TEST NUMBER: P913688

CATALOG NUMBER: DFN2DIP-HX4F0-090D040US927-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.58	12.67	12.33	13.44	14.37	11.15	12.24	11.89	13.01	13.94
	3H	13.26	14.24	14.02	15.02	15.98	12.78	13.77	13.54	14.55	15.50
	4H	13.86	14.79	14.63	15.57	16.54	13.38	14.31	14.16	15.10	16.07
	6H	14.27	15.13	15.06	15.92	16.90	13.79	14.65	14.58	15.45	16.43
	8H	14.38	15.20	15.18	16.01	17.00	13.90	14.72	14.71	15.54	16.52
	12H	14.44	15.22	15.24	16.03	17.03	13.96	14.74	14.76	15.54	16.55
4H	2H	12.07	13.00	12.85	13.79	14.75	11.72	12.65	12.51	13.44	14.41
	3H	13.96	14.73	14.75	15.55	16.54	13.56	14.34	14.36	15.16	16.15
	4H	14.68	15.39	15.49	16.21	17.22	14.28	14.98	15.08	15.80	16.82
	6H	15.21	15.82	16.04	16.67	17.69	14.80	15.41	15.63	16.26	17.28
	8H	15.37	15.94	16.20	16.78	17.81	14.95	15.53	15.78	16.37	17.40
	12H	15.45	15.97	16.30	16.83	17.86	15.03	15.54	15.88	16.41	17.44
8H	4H	14.90	15.47	15.73	16.31	17.34	14.54	15.11	15.37	15.95	16.98
	6H	15.54	16.01	16.40	16.90	17.93	15.18	15.65	16.03	16.53	17.56
	8H	15.76	16.18	16.63	17.06	18.11	15.39	15.81	16.26	16.69	17.74
	12H	15.91	16.28	16.78	17.15	18.25	15.52	15.89	16.39	16.76	17.86
12H	4H	14.89	15.41	15.74	16.27	17.31	14.54	15.06	15.39	15.92	16.95
	6H	15.57	15.99	16.44	16.87	17.92	15.22	15.64	16.09	16.52	17.57
	8H	15.83	16.20	16.70	17.07	18.17	15.47	15.84	16.34	16.71	17.81