

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P928366

Luminaire Tested: DFN2DIP-HX4F0-090D080US927-RLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P928366
REPORT IS A COMBINATION OF REPORTS P900902 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-090D080US927-RLLONL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12331.5 lumens
Efficiency: N/A
Efficacy: 83.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 147
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9821
Total Harmonic Distortion (THDi): 0.08
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P928366

CATALOG NUMBER: DFN2DIP-HX4F0-090D080US927-RLLONL

Luminous Intensity Polar Plot

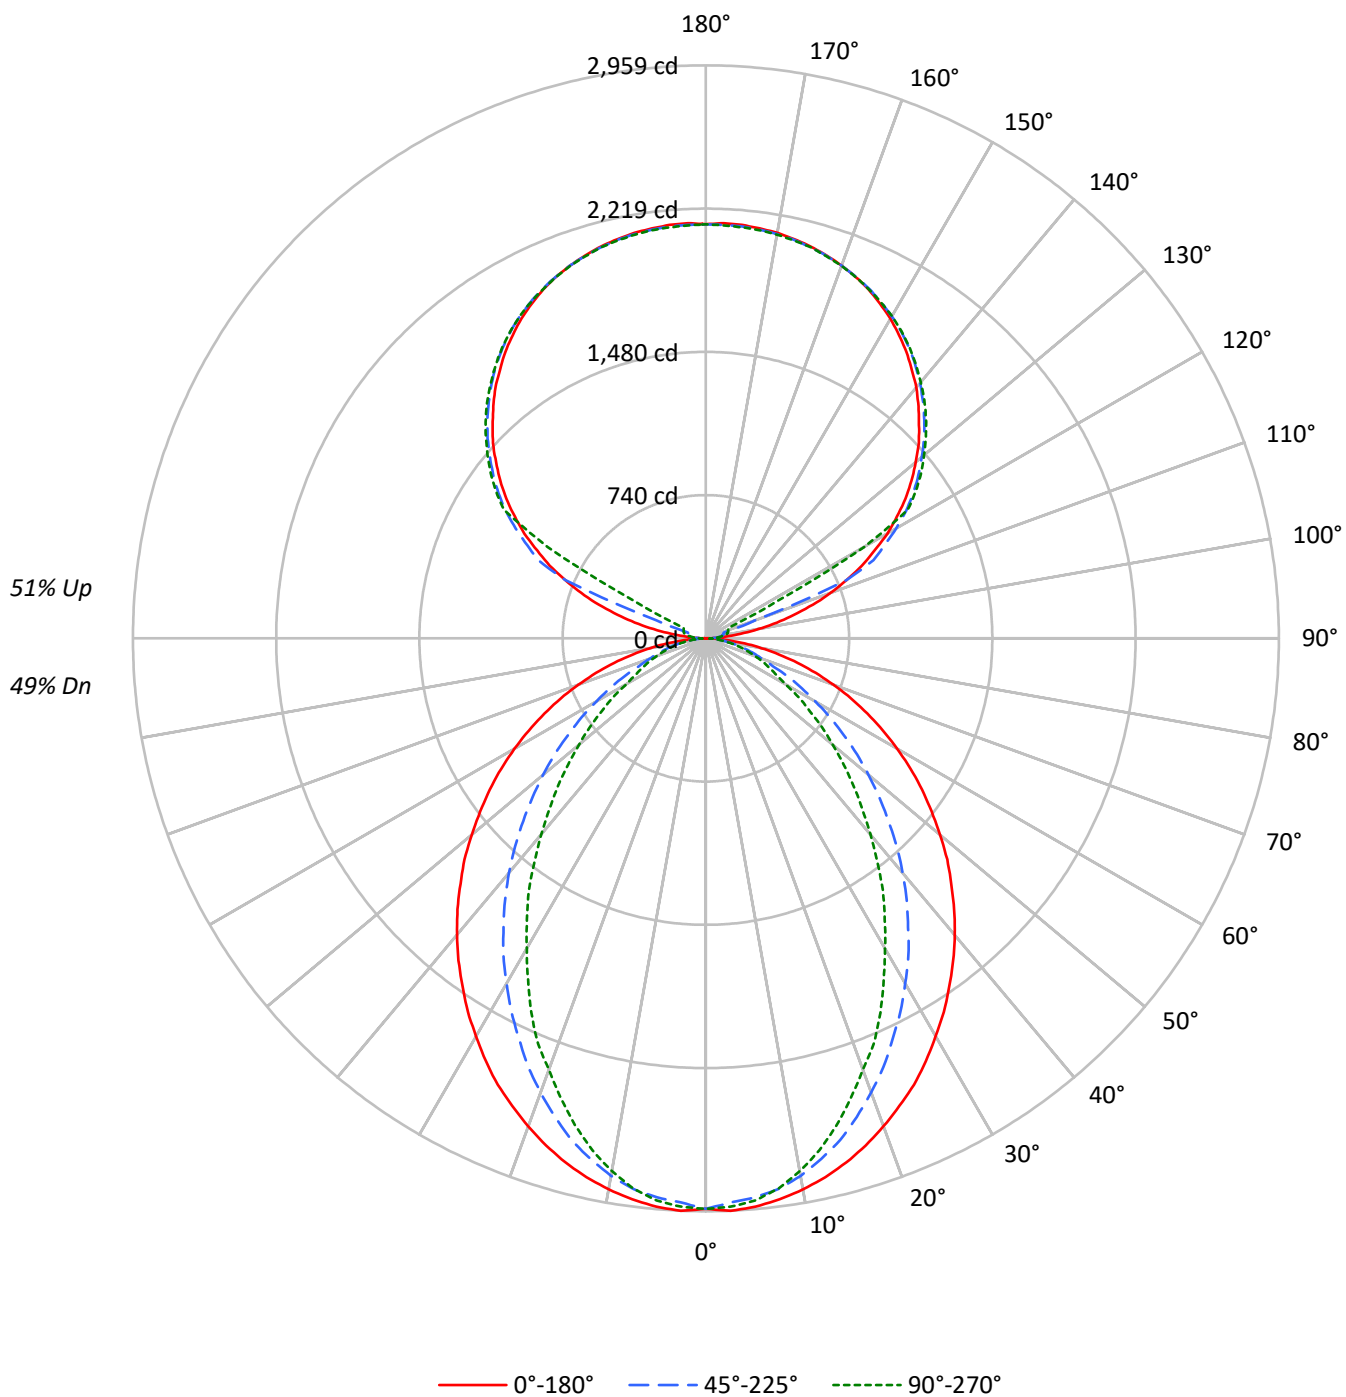

TEST NUMBER: P928366

CATALOG NUMBER: DFN2DIP-HX4F0-090D080US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	52	49	44	42	41
3	82	73	66	60	75	68	62	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	37	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	30	27
6	64	52	44	39	59	49	42	37	42	36	32	36	31	28	30	27	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	28	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2191	2191	2191
5°	2194	2156	2170
10°	2173	2114	2099
15°	2143	2044	1990
20°	2104	1948	1856
25°	2063	1840	1727
30°	2009	1730	1563
35°	1956	1611	1419
40°	1902	1488	1254
45°	1839	1351	1104
50°	1774	1214	958
55°	1706	1066	817
60°	1628	912	673
65°	1538	756	606
70°	1428	610	548
75°	1291	538	499
80°	1092	452	433
85°	763	303	326

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1839 cd/sqm

TEST NUMBER: P928366

CATALOG NUMBER: DFN2DIP-HX4F0-090D080US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.1	2.2
10°-20°	758.0	6.1
20°-30°	1064.1	8.6
30°-40°	1160.0	9.4
40°-50°	1066.2	8.6
50°-60°	837.3	6.8
60°-70°	545.0	4.4
70°-80°	280.5	2.3
80°-90°	75.4	0.6
90°-100°	70.5	0.6
100°-110°	262.9	2.1
110°-120°	697.1	5.7
120°-130°	1156.2	9.4
130°-140°	1228.2	10.0
140°-150°	1141.5	9.3
150°-160°	917.7	7.4
160°-170°	591.3	4.8
170°-180°	203.5	1.7
0°-30°	2098.2	17.0
0°-40°	3258.2	26.4
0°-60°	5161.6	41.9
0°-90°	6062.6	49.2
90°-120°	1030.5	8.4
90°-150°	4556.4	36.9
90°-180°	6269.0	50.8
0°-180°	12331.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2946	2946	2946	2946	2946	
5°	2946	2933	2898	2922	2914	279
15°	2802	2773	2682	2631	2605	790
25°	2544	2458	2282	2173	2133	1170
35°	2192	2056	1821	1653	1594	1372
45°	1792	1613	1333	1144	1080	1384
55°	1362	1154	866	707	656	1217
65°	920	704	464	373	365	912
75°	490	304	213	195	192	519
85°	114	58	51	51	51	131
90°	2	18	31	39	42	12
95°	100	49	60	68	66	119
105°	470	517	94	111	118	503
115°	890	916	955	238	127	876
125°	1258	1278	1307	1318	1323	1122
135°	1557	1581	1595	1611	1608	1202
145°	1806	1804	1830	1841	1834	1129
155°	1988	1974	1993	2002	1990	916
165°	2095	2086	2090	2101	2090	592
175°	2143	2132	2135	2146	2131	204
180°	2138	2138	2138	2138	2138	

TEST NUMBER: P928366

CATALOG NUMBER: DFN2DIP-HX4F0-090D080US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2946.0	2946.0	2946.0	2946.0	2946.0
2.5°	2959.3	2946.0	2916.5	2943.5	2938.1
5°	2946.0	2932.7	2897.9	2921.9	2914.0
7.5°	2921.9	2906.1	2868.8	2879.2	2865.9
10°	2890.0	2871.3	2818.2	2809.9	2794.1
12.5°	2850.1	2826.1	2753.9	2738.1	2708.6
15°	2802.0	2772.6	2682.1	2631.4	2604.9
17.5°	2746.0	2703.3	2591.3	2532.7	2490.0
20°	2682.1	2628.6	2495.4	2428.9	2370.1
22.5°	2612.8	2551.4	2396.7	2306.1	2266.3
25°	2543.5	2458.1	2282.1	2172.9	2132.8
27.5°	2460.9	2370.1	2175.5	2050.2	1988.8
30°	2372.9	2271.4	2058.1	1922.3	1850.2
32.5°	2287.5	2164.7	1946.3	1786.3	1719.5
35°	2191.6	2055.6	1821.0	1653.1	1594.2
37.5°	2098.2	1951.5	1703.7	1519.5	1453.1
40°	1999.6	1839.7	1580.9	1391.7	1322.4
42.5°	1898.3	1727.7	1458.4	1261.0	1194.5
45°	1791.7	1612.9	1333.1	1143.6	1079.7
47.5°	1690.4	1501.2	1213.2	1023.7	965.1
50°	1578.4	1389.1	1095.8	911.7	855.9
52.5°	1468.9	1268.9	983.8	807.8	757.2
55°	1362.2	1154.3	866.4	706.6	655.9
57.5°	1253.1	1039.8	762.6	613.2	570.6
60°	1141.0	927.7	653.2	517.3	474.6
62.5°	1031.9	818.6	559.8	432.0	410.7
65°	919.8	703.8	463.9	373.3	365.2
67.5°	813.2	597.1	373.3	327.8	319.9
70°	701.2	493.3	309.2	282.6	271.8
72.5°	594.6	397.1	258.5	237.3	232.0
75°	490.5	303.8	213.3	194.6	192.1
77.5°	386.7	215.8	168.0	157.3	151.9
80°	290.5	154.8	127.8	117.4	117.4
82.5°	202.5	104.1	88.0	82.6	82.6
85°	114.5	58.5	50.6	50.6	50.6
87.5°	42.7	21.2	21.2	18.7	18.7
90°	1.5	18.5	30.9	38.7	41.7
92.5°	38.7	32.6	37.1	40.2	41.7
95°	100.5	49.4	60.3	68.2	66.5
97.5°	181.0	54.2	78.8	83.6	85.1
100°	274.0	61.9	88.2	100.5	103.6
102.5°	376.0	373.0	91.3	108.2	113.0
105°	470.4	516.9	94.4	111.4	117.6
107.5°	580.2	618.8	97.6	114.4	120.7
110°	685.6	717.9	270.9	116.1	122.2

TEST NUMBER: P928366

CATALOG NUMBER: DFN2DIP-HX4F0-090D080US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	784.6	812.3	786.1	119.0	123.9
115°	889.7	915.9	954.7	238.3	127.0
117.5°	981.0	1011.9	1038.3	816.9	411.6
120°	1083.1	1106.3	1134.2	1152.8	943.8
122.5°	1169.6	1194.5	1225.5	1234.7	1236.4
125°	1257.9	1278.1	1307.4	1318.3	1322.9
127.5°	1338.3	1360.0	1383.4	1398.8	1400.3
130°	1414.2	1439.0	1455.9	1473.0	1471.5
132.5°	1491.6	1511.8	1528.7	1542.7	1541.2
135°	1556.6	1581.4	1595.2	1610.8	1607.7
137.5°	1624.6	1643.2	1658.8	1674.2	1669.6
140°	1691.1	1703.6	1720.5	1734.5	1726.7
142.5°	1747.0	1757.8	1777.8	1790.2	1782.4
145°	1805.8	1804.1	1830.4	1841.2	1833.5
147.5°	1856.7	1852.1	1878.3	1886.1	1880.0
150°	1906.3	1895.4	1920.2	1929.4	1921.7
152.5°	1948.0	1935.6	1958.8	1968.2	1957.3
155°	1988.2	1974.5	1993.0	2002.2	1989.9
157.5°	2020.7	2008.4	2022.4	2033.2	2020.7
160°	2048.7	2039.3	2048.7	2057.9	2047.0
162.5°	2073.3	2064.1	2071.8	2082.6	2068.7
165°	2095.0	2085.8	2090.4	2101.2	2090.4
167.5°	2112.0	2102.7	2107.4	2118.3	2104.3
170°	2126.0	2116.6	2119.8	2130.6	2116.6
172.5°	2135.2	2126.0	2129.1	2140.0	2126.0
175°	2142.9	2132.1	2135.2	2146.0	2130.6
177.5°	2146.0	2135.2	2136.8	2147.7	2133.7
180°	2138.3	2138.3	2138.3	2138.3	2138.3

TEST NUMBER: P928366

CATALOG NUMBER: DFN2DIP-HX4F0-090D080US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.79	10.62	10.76	11.60	12.88	5.77	6.59	6.74	7.57	8.86
	3H	11.47	12.21	12.45	13.20	14.51	6.96	7.69	7.94	8.68	9.99
	4H	12.08	12.78	13.08	13.77	15.09	7.41	8.10	8.40	9.10	10.41
	6H	12.50	13.14	13.51	14.14	15.47	7.73	8.37	8.74	9.37	10.70
	8H	12.63	13.24	13.64	14.25	15.58	7.82	8.43	8.83	9.45	10.77
	12H	12.69	13.27	13.71	14.28	15.63	7.87	8.44	8.88	9.45	10.80
4H	2H	9.81	10.51	10.81	11.50	12.82	6.36	7.06	7.36	8.05	9.37
	3H	11.64	12.22	12.65	13.24	14.57	7.71	8.29	8.72	9.31	10.64
	4H	12.33	12.86	13.35	13.88	15.23	8.26	8.79	9.28	9.81	11.16
	6H	12.85	13.30	13.88	14.34	15.69	8.68	9.14	9.71	10.18	11.53
	8H	13.03	13.45	14.06	14.48	15.84	8.81	9.24	9.84	10.27	11.63
	12H	13.12	13.50	14.17	14.55	15.92	8.88	9.26	9.93	10.31	11.68
8H	4H	12.30	12.73	13.33	13.76	15.12	8.54	8.97	9.57	10.00	11.36
	6H	12.87	13.22	13.92	14.29	15.65	9.06	9.41	10.12	10.49	11.85
	8H	13.09	13.39	14.15	14.45	15.83	9.26	9.56	10.32	10.62	12.00
	12H	13.22	13.50	14.29	14.55	15.97	9.38	9.65	10.44	10.70	12.12
12H	4H	12.25	12.64	13.30	13.68	15.05	8.55	8.93	9.59	9.98	11.35
	6H	12.84	13.15	13.91	14.21	15.59	9.11	9.42	10.17	10.48	11.86
	8H	13.07	13.34	14.13	14.39	15.81	9.32	9.60	10.39	10.65	12.07

END OF REPORT