

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P928574

Luminaire Tested: DFN2DIP-HX4F0-060D060US930-RLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P928574
REPORT IS A COMBINATION OF REPORTS P900860 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-060D060US930-RLLONL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8997.5 lumens
Efficiency: N/A
Efficacy: 91.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 98.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P928574

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US930-RLLONL

Luminous Intensity Polar Plot

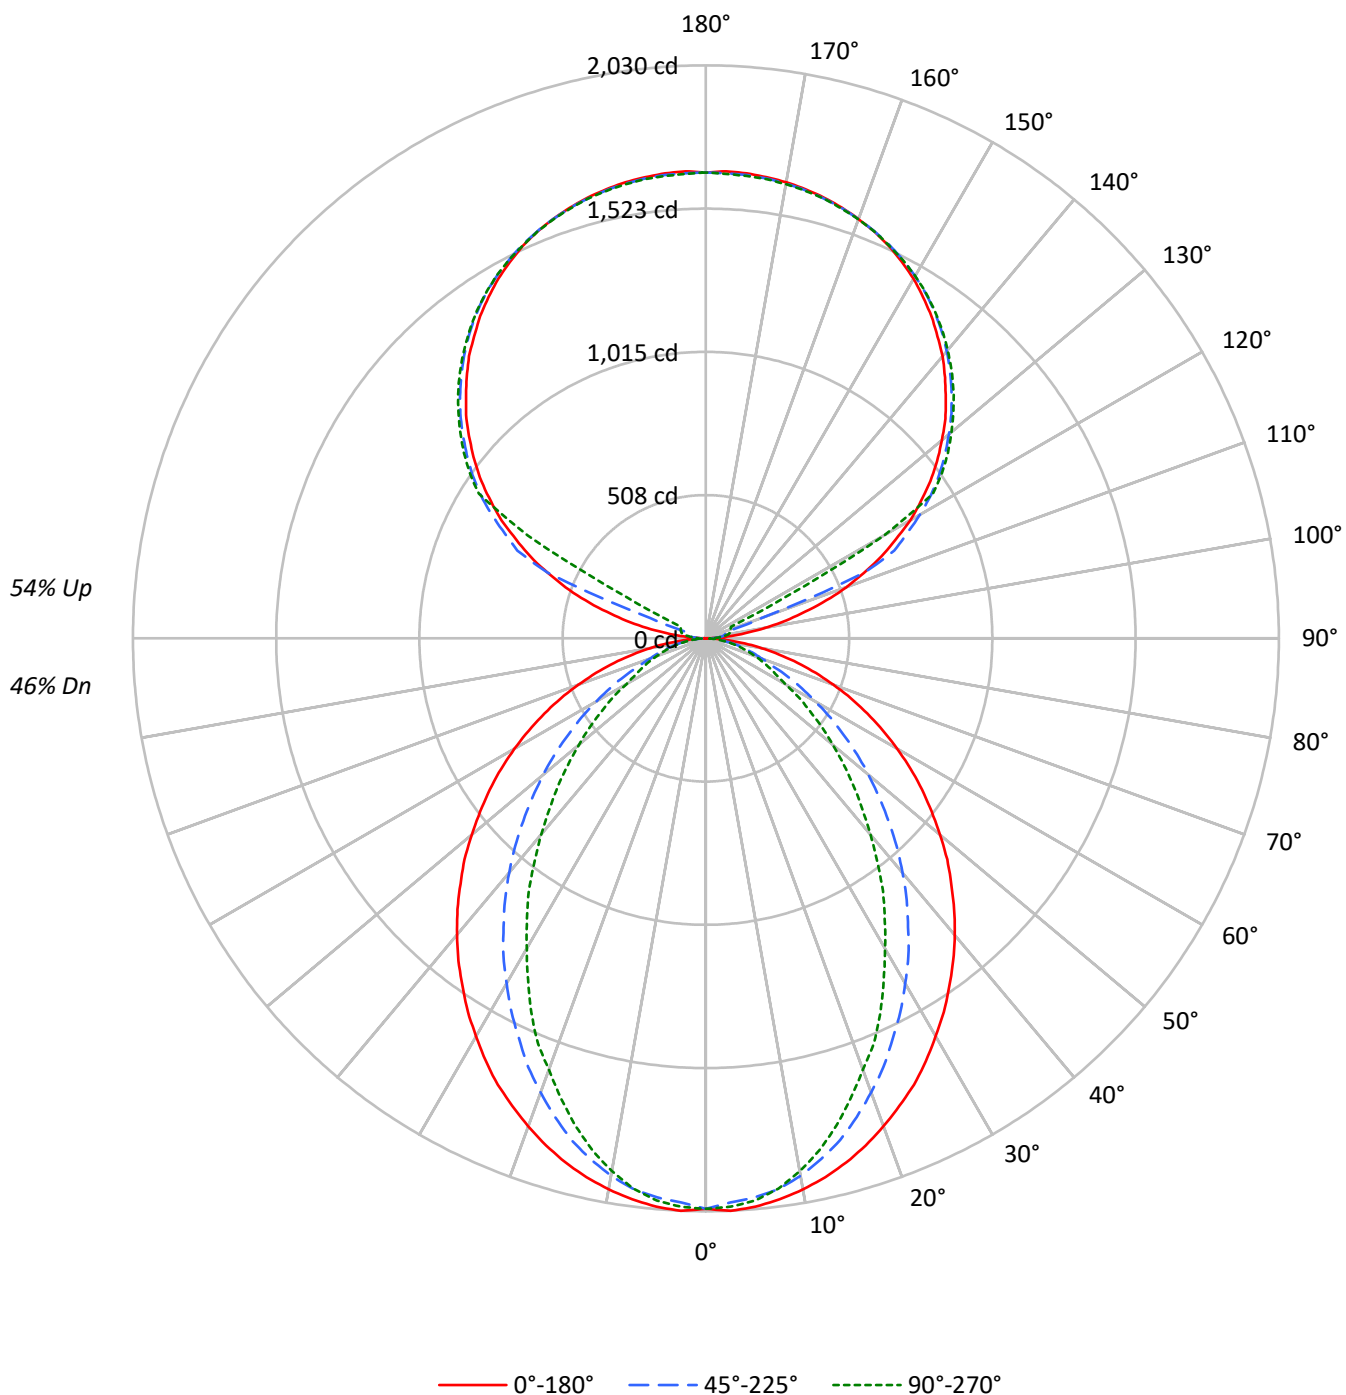

TEST NUMBER: P928574

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1503	1503	1503
5°	1505	1479	1488
10°	1491	1450	1440
15°	1470	1402	1365
20°	1443	1336	1273
25°	1415	1263	1185
30°	1378	1187	1072
35°	1342	1105	973
40°	1305	1021	860
45°	1262	927	757
50°	1217	833	657
55°	1171	732	561
60°	1117	626	462
65°	1055	519	416
70°	980	418	376
75°	886	369	343
80°	749	310	297
85°	524	208	224

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1262 cd/sqm

TEST NUMBER: P928574

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	189.4	2.1
10°-20°	520.0	5.8
20°-30°	730.0	8.1
30°-40°	795.8	8.8
40°-50°	731.4	8.1
50°-60°	574.4	6.4
60°-70°	373.9	4.2
70°-80°	192.5	2.1
80°-90°	52.0	0.6
90°-100°	54.4	0.6
100°-110°	202.9	2.3
110°-120°	538.0	6.0
120°-130°	892.3	9.9
130°-140°	947.9	10.5
140°-150°	880.9	9.8
150°-160°	708.2	7.9
160°-170°	456.4	5.1
170°-180°	157.1	1.7
0°-30°	1439.4	16.0
0°-40°	2235.2	24.8
0°-60°	3541.0	39.4
0°-90°	4159.4	46.2
90°-120°	795.3	8.8
90°-150°	3516.4	39.1
90°-180°	4838.0	53.8
0°-180°	8997.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2021	2021	2021	2021	2021	
5°	2021	2012	1988	2005	1999	192
15°	1922	1902	1840	1805	1787	542
25°	1745	1686	1566	1491	1463	802
35°	1504	1410	1249	1134	1094	941
45°	1229	1106	915	784	741	949
55°	935	792	594	485	450	835
65°	631	483	318	256	250	626
75°	336	208	146	134	132	356
85°	79	40	35	35	35	90
90°	1	14	24	30	32	8
95°	78	38	46	53	51	92
105°	363	399	73	86	91	388
115°	687	707	737	184	98	676
125°	971	986	1009	1017	1021	866
135°	1201	1220	1231	1243	1241	928
145°	1394	1392	1413	1421	1415	872
155°	1534	1524	1538	1545	1536	707
165°	1617	1610	1613	1622	1613	457
175°	1654	1646	1648	1656	1644	157
180°	1650	1650	1650	1650	1650	

TEST NUMBER: P928574

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2021.0	2021.0	2021.0	2021.0	2021.0
2.5°	2030.2	2021.0	2000.8	2019.2	2015.6
5°	2021.0	2011.9	1988.0	2004.6	1999.1
7.5°	2004.6	1993.7	1968.1	1975.2	1966.1
10°	1982.6	1969.8	1933.3	1927.7	1916.8
12.5°	1955.3	1938.7	1889.3	1878.4	1858.2
15°	1922.3	1902.0	1839.9	1805.2	1787.0
17.5°	1883.9	1854.5	1777.7	1737.5	1708.2
20°	1839.9	1803.3	1711.9	1666.3	1625.9
22.5°	1792.4	1750.3	1644.2	1582.1	1554.7
25°	1744.9	1686.3	1565.6	1490.7	1463.2
27.5°	1688.3	1625.9	1492.4	1406.4	1364.4
30°	1627.9	1558.2	1411.9	1318.8	1269.3
32.5°	1569.3	1485.1	1335.3	1225.4	1179.6
35°	1503.5	1410.2	1249.3	1134.0	1093.6
37.5°	1439.5	1338.7	1168.8	1042.5	996.8
40°	1371.7	1262.1	1084.5	954.7	907.2
42.5°	1302.3	1185.3	1000.5	865.0	819.5
45°	1229.1	1106.4	914.6	784.5	740.7
47.5°	1159.7	1029.8	832.3	702.3	662.1
50°	1082.8	953.0	751.8	625.4	587.2
52.5°	1007.7	870.5	674.9	554.2	519.5
55°	934.6	791.9	594.4	484.8	450.0
57.5°	859.7	713.3	523.1	420.7	391.4
60°	782.8	636.5	448.1	354.9	325.6
62.5°	707.9	561.6	384.0	296.3	281.7
65°	631.1	482.8	318.3	256.2	250.5
67.5°	557.9	409.6	256.2	224.9	219.5
70°	481.0	338.4	212.1	193.9	186.5
72.5°	407.9	272.5	177.3	162.8	159.1
75°	336.5	208.4	146.3	133.5	131.8
77.5°	265.3	148.1	115.2	107.9	104.2
80°	199.3	106.1	87.7	80.5	80.5
82.5°	139.0	71.4	60.3	56.6	56.6
85°	78.6	40.2	34.7	34.7	34.7
87.5°	29.3	14.6	14.6	12.8	12.8
90°	1.1	14.3	23.8	29.9	32.2
92.5°	29.9	25.1	28.6	31.1	32.2
95°	77.6	38.1	46.5	52.6	51.3
97.5°	139.7	41.8	60.8	64.5	65.7
100°	211.4	47.8	68.1	77.6	80.0
102.5°	290.1	287.9	70.5	83.5	87.2
105°	363.0	398.9	72.9	85.9	90.8
107.5°	447.8	477.6	75.3	88.3	93.2
110°	529.1	554.0	209.0	89.6	94.3

TEST NUMBER: P928574

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	605.5	626.9	606.6	91.9	95.6
115°	686.6	706.9	736.8	183.9	98.0
117.5°	757.1	780.9	801.3	630.5	317.6
120°	835.9	853.8	875.4	889.7	728.4
122.5°	902.7	921.8	945.8	952.9	954.2
125°	970.8	986.4	1009.1	1017.4	1021.0
127.5°	1032.9	1049.6	1067.6	1079.5	1080.7
130°	1091.4	1110.6	1123.6	1136.8	1135.7
132.5°	1151.2	1166.8	1179.8	1190.6	1189.4
135°	1201.4	1220.5	1231.1	1243.2	1240.8
137.5°	1253.8	1268.1	1280.2	1292.1	1288.6
140°	1305.1	1314.8	1327.9	1338.6	1332.7
142.5°	1348.3	1356.6	1372.1	1381.6	1375.6
145°	1393.6	1392.3	1412.6	1421.0	1415.1
147.5°	1432.9	1429.3	1449.6	1455.6	1450.9
150°	1471.2	1462.8	1482.0	1489.1	1483.1
152.5°	1503.4	1493.9	1511.7	1519.0	1510.6
155°	1534.5	1523.8	1538.1	1545.2	1535.7
157.5°	1559.6	1550.0	1560.8	1569.2	1559.6
160°	1581.1	1573.8	1581.1	1588.2	1579.9
162.5°	1600.1	1593.0	1598.9	1607.3	1596.6
165°	1616.9	1609.8	1613.3	1621.7	1613.3
167.5°	1630.0	1622.8	1626.5	1634.9	1624.1
170°	1640.8	1633.6	1636.0	1644.3	1633.6
172.5°	1647.9	1640.8	1643.2	1651.6	1640.8
175°	1653.9	1645.5	1647.9	1656.2	1644.3
177.5°	1656.2	1647.9	1649.2	1657.5	1646.8
180°	1650.3	1650.3	1650.3	1650.3	1650.3

TEST NUMBER: P928574

CATALOG NUMBER: DFN2DIP-HX4F0-060D060US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.20	9.00	9.20	10.00	11.33	4.17	4.97	5.17	5.98	7.30
	3H	9.88	10.59	10.88	11.60	12.95	5.36	6.08	6.37	7.09	8.44
	4H	10.48	11.16	11.50	12.18	13.53	5.81	6.49	6.83	7.50	8.86
	6H	10.90	11.53	11.93	12.55	13.91	6.13	6.76	7.16	7.77	9.14
	8H	11.03	11.62	12.07	12.66	14.02	6.22	6.82	7.26	7.85	9.21
	12H	11.09	11.66	12.13	12.68	14.07	6.27	6.83	7.31	7.86	9.25
4H	2H	8.21	8.89	9.24	9.91	11.26	4.77	5.44	5.79	6.46	7.81
	3H	10.04	10.61	11.08	11.65	13.02	6.12	6.68	7.15	7.72	9.09
	4H	10.73	11.25	11.77	12.28	13.68	6.66	7.18	7.70	8.21	9.60
	6H	11.25	11.69	12.30	12.75	14.14	7.08	7.52	8.13	8.58	9.97
	8H	11.42	11.84	12.48	12.89	14.29	7.21	7.62	8.26	8.68	10.08
	12H	11.52	11.89	12.59	12.96	14.36	7.28	7.65	8.35	8.71	10.12
8H	4H	10.70	11.11	11.75	12.16	13.57	6.94	7.35	7.99	8.41	9.81
	6H	11.27	11.61	12.34	12.70	14.10	7.46	7.80	8.54	8.89	10.29
	8H	11.48	11.78	12.57	12.86	14.28	7.65	7.95	8.73	9.03	10.45
	12H	11.62	11.89	12.71	12.96	14.42	7.77	8.04	8.86	9.11	10.57
12H	4H	10.65	11.02	11.72	12.09	13.50	6.95	7.32	8.01	8.38	9.79
	6H	11.24	11.54	12.32	12.62	14.04	7.51	7.81	8.59	8.89	10.31
	8H	11.46	11.73	12.55	12.80	14.26	7.72	7.98	8.81	9.06	10.52